
Northeast Corridor Capital Investment Plan

Fiscal Years 2021-2025

October 2020



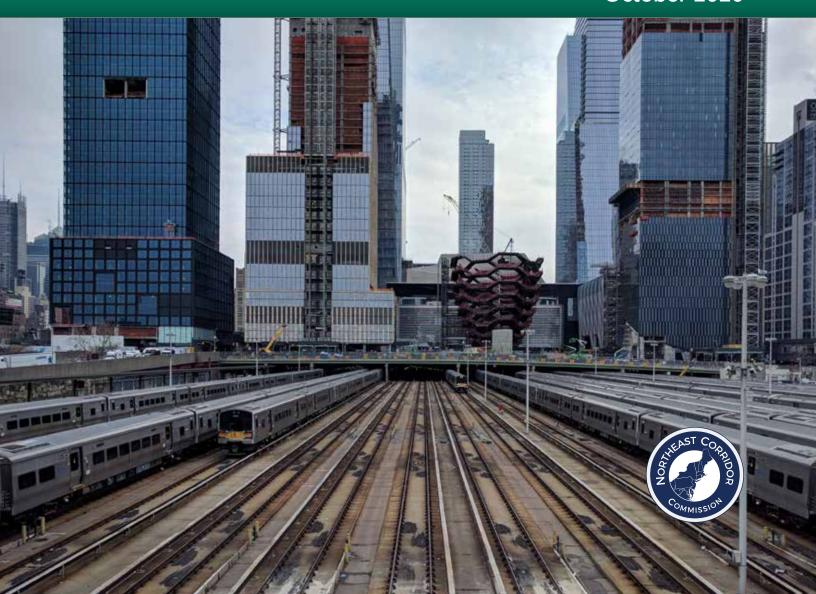

Congress established the Northeast Corridor Commission to develop coordinated strategies for improving the Northeast's core rail network in recognition of the inherent challenges of planning, financing, and implementing major infrastructure improvements that cross multiple jurisdictions. The expectation is that by coming together to take collective responsibility for the NEC, these

disparate stakeholders will achieve a level of success that far exceeds the potential reach of any individual organization.

The Commission is governed by a board comprised of one member from each of the NEC states (Massachusetts, Rhode Island, Connecticut, New York, New Jersey, Pennsylvania, Delaware, and Maryland) and the District of Columbia; four members from Amtrak; and five members from the U.S. Department of Transportation. The Commission also includes non-voting representatives from four freight railroads, states with connecting corridors, and several commuter operators in the region.























Contents

| Letter from the Co-Chairs | 1 |
|--|-----|
| Introduction | 3 |
| FY21-25 Capital Investment Plan | 6 |
| NEC Investment Summary | 6 |
| NEC Infrastructure Investments with Funding Available in FY21-25 | 8 |
| NEC Infrastructure Investments with Funding Needs in FY21-25 | 16 |
| Funding Needs beyond FY21-25 | 21 |
| Project Information Appendix | 22 |
| Capital Renewal | 22 |
| Special Projects | 152 |



Letter from the Co-Chairs

We are enduring the most difficult times any of our agencies have experienced. The COVID-19 pandemic has cost so much for Northeast Corridor stakeholders: fewer customers, lost revenue, and less certainty for our futures. Most grievously, we have lost staff members to the virus. Despite these hardships, our agencies and their employees have carried on, keeping systems running as safely as possible, in particular to support the movement of the essential workers who have kept our healthcare system and our economy as functional as possible.

Although the pandemic has created tremendous uncertainty for our industry, it has not changed the imperative to bring the Northeast Corridor to a state of good repair and lay a foundation for growth once the current crisis eases and life returns to normal. Capital plans have always played—and will continue to play—a key role in advancing these goals, yet they also represent a snapshot in time and can be challenging to prepare under normal circumstances. This document, the FY21-25 NEC Capital Investment Plan, was developed during the first six months of the pandemic; as such, it reflects the Commission's best available information during an extremely volatile and dynamic period where stakeholders have even less clarity than usual on what funding might be available to support our operations and capital programs. The Commission approved the Capital Investment Plan mindful of these uncertainties and will report adjustments to plan through its quarterly reporting process. It is our hope and expectation that the advancement of NEC capital investments will play an important role in supporting the industry's recovery and energizing the regional economy.

Looking beyond the five-year time frame, the Commission has been hard at work on CONNECT NEC 2035, a planning process that will provide a roadmap for implementing phase one (i.e., the first 15 years) of the Federal Railroad Administration's long-term vision for the corridor established in the 2017 NEC FUTURE Record of Decision. Key to this planning process will be an unprecedented project delivery analysis—an assessment of the track outage and workforce requirements to build all identified infrastructure projects by 2035 while maintaining, at minimum, pre-COVID-19 service levels. When CONNECT NEC 2035 is completed by the fall of 2021, the Commission will begin using it as a roadmap for the annual NEC Capital Investment Plan.

As these planning efforts progress and mature, much work remains to improve capital planning, reporting, and plan adherence at NEC stakeholder agencies, but the commitment to make those improvements remains strong. During these difficult times, Commission members are committed to working together and with Congress to maintain essential operations, spend capital dollars as efficiently as possible, and plan for our future. We look forward to continued partnership and brighter days to come.

Ronald Batory Administrator, Federal Railroad Administration Co-Chair, Northeast Corridor Commission

Kevin S. Corbett Executive Director, NJ TRANSIT Co-Chair, Northeast Corridor Commission



Introduction

The Northeast Corridor

Each day, the Northeast Corridor—both the NEC main line and connecting corridors to Harrisburg, PA; Spuyten Duyvil, NY; and Springfield, MA—hosts the passenger rail operations of eight commuter railroads and Amtrak's intercity services. The 457-mile main line railroad still includes many bridges and tunnels that date back to the period between the Civil War and the New Deal. Located in the most densely populated region of the United States, the NEC is a vital transportation asset.

Between fiscal years 2016 and 2019, the NEC hosted over 800,000 average daily trips. However, fiscal year 2020 presented significant challenges to its riders and operating agencies due to the impacts of the COVID-19 pandemic. Since March 2020, NEC commuter and intercity passenger rail, like other transportation modes across the United States, has experienced steep ridership declines as the nation used social-distancing, telework, and travel advisories to slow the spread of the disease.


As a result of these measures, a global recession is on-going without a clear end in sight. Unemployment in the metro areas along the Northeast Corridor alone rose by 10 percentage points during the third quarter of federal fiscal year 2020 compared to the same period last year. When the economy returns to full strength in the coming years, the NEC rail system will continue to serve as a vital transportation asset and driver of economic growth. Capital investment in the NEC will ensure a well-functioning railroad to enable workers to commute to jobs, people to connect with family and friends, and the region to attract businesses in a globally competitive economy.

The Northeast Corridor Commission

Congress established the Northeast Corridor Commission to develop coordinated strategies for improving the Northeast's core rail network in recognition of the inherent challenges of planning, financing, and implementing major infrastructure improvements that cross multiple jurisdictions. The expectation is that by coming together to take collective responsibility for the NEC, these disparate stakeholders will achieve a level of success that far exceeds the potential reach of any individual organization.

The Commission is governed by a board comprised of one member from each of the NEC states (Massachusetts, Rhode Island, Connecticut, New York, New Jersey, Pennsylvania, Delaware, and Maryland) and the District of Columbia; four members from Amtrak; and five members from the U.S. Department of Transportation. The Commission also includes non-voting representatives from freight railroads, states with connecting corridors, and several commuter operators in the region.

The NEC Commuter and Intercity Rail Cost Allocation Policy



In September 2015, the Commission adopted the NEC Commuter and Intercity Rail Cost Allocation Policy. The Policy outlines a partnership built on three pillars.

First, it established a framework for allocating approximately \$1.3 billion annually in shared operating costs and capital normalized replacement values among the NEC's four right-of-way owners and nine passenger rail operators. The agencies' financial obligations are calculated annually through the NEC Commission's Cost Allocation Model and are based on agencies' relative use of NEC infrastructure. Right-of-way owners use agencies' capital obligations, referred to as Baseline Capital Charges, to

fund capital renewal investments associated with right-of-way basic infrastructure assets, such as track, structures, electric traction systems, and communication and signal systems.

Second, the Policy established a framework for transparency, collaboration, and accountability, including a first-ever corridor-wide capital planning and reporting process. The NEC Capital Investment Plan is a key component of that NEC-wide process and is required by the most recent federal transportation law, Fixing America's Surface Transportation (FAST) Act (49 U.S.C. §24904(a)(1)). The final pillar of the Policy outlines a stable federal partnership framework from the perspective of Amtrak, NEC states, and Commuter Authorities, which, if implemented, should provide dependable and adequate funding to help restore the NEC to a state-of-good-repair, beyond the vital funds appropriated by Congress annually.

The NEC Capital Investment Plan

The NEC Capital Investment Plan (CIP) integrates NEC infrastructure investments planned by each NEC owner and operator over a five-year period into a single planning document to develop a complete picture of corridor activities. The plan combines anticipated investments based on available funding with capital investments that could occur with additional funding given available resources. Year One of the CIP serves as an implementation plan and as the baseline to measure capital investment progress through quarterly Capital Program Delivery Reports and the NEC Annual Report.

Stakeholders developed this plan by participating in an iterative and collaborative data gathering and review process. As a result of this collaboration, the plan transparently documents investments planned or required over the next five federal fiscal years to reverse decades of deterioration and begin to modernize the NEC for future economic growth.

Other NEC Plans and Reports

- The NEC Annual Report documents the operational performance of NEC trains, the delivery of Year One of the NEC Capital Investment Plan and makes recommendations for improvement.
- CONNECT NEC 2035 will present the business case for sustained investment in the NEC by identifying long-term service objectives and the capital investments required to achieve those objectives over a 15-year period. CONNECT NEC 2035 will be published by fall 2021.

Download a copy of the Policy and all NEC plans and reports at nec-commission.com

Figure 1. NEC Commission Plans and Reports



an implementation plan and

the baseline for capital program

delivery reporting.

contains recommendations for

improvement.

FY21-25 Capital Investment Plan

The NEC Capital Investment Plan for federal fiscal years 2021-2025 documents the infrastructure investments expected to be undertaken with available funding and the scope of work which could be undertaken during the five-year time frame if additional funding was made available. Per the NEC Cost Allocation Policy, all investments in this plan should reflect resource constraints, such as workforce and track time availability and project readiness; the first year (or "Year One") is also fiscally constrained and serves as the baseline for Commission reporting on plan implementation.

NEC Investment Summary

Despite unprecedented funding uncertainties, NEC stakeholders are planning ambitious capital investment during FY21-25 to advance critical projects essential to the corridor's future and begin to reduce the SOGR backlog.

NEC stakeholders have prepared a five-year capital investment plan for FY21-25 that amounts to \$33.9 billion. This figure reflects total funding that must be secured, obligated, and/or programmed during the five-year time frame to advance projects on schedule and maintain a reliable railroad; it does not represent the total amount of funding to be expended by NEC stakeholders during the five-year time frame. Figure 2 (Five-Year Capital Investment Plan) below shows the key components of this \$33.9 billion amount. These components are further explained in Figure 9 on page 16.



Figure 2. Five-Year Capital Investment Plan

Impact of COVID-19 on the FY21-25 Capital Investment Plan

As described in the introduction, the COVID-19 pandemic has had a devastating impact on NEC intercity and commuter rail systems. Declining ridership and revenues have created tremendous uncertainty regarding agencies' capital budgets and programming activities, which are often stretched thin under normal circumstances.

Throughout the assembly of this plan, agencies expressed concern about shifting budgets and acknowledged that many project scopes assume a healthy and productive workforce despite the threat of the pandemic and potential furloughs and layoffs. Agencies expect that budget and workforce uncertainties will result in deferred or canceled capital projects, at least in FY21, as agencies must adapt their plans to the unfolding impacts of the pandemic.

Furthermore, funding assumed to be available over the next five years and the associated planned investments are at risk depending on future federal support and how long operators experience decreased farebox or other revenue due to the pandemic.

In March, Amtrak and commuter agencies received emergency federal support through the Coronavirus Aid, Relief, and Economic Security (CARES) Act to offset lost revenue and pandemic-related costs. The over \$8.3 billion to NEC operators helped stabilize the industry in the near-term as it faced declining revenues and unprecedented budget gaps. As it became clear that COVID-19 revenue impacts were going to be far more severe and longerlasting than initially expected, Amtrak and transit agencies requested a significant new infusion of federal funds to help them survive a challenging FY21.



Of the Five-Year Plan amount, approximately \$16.2 billion is currently available or expected to be secured during FY21-25. Some portion of that the Five-Year Funding Available will be spent directly on infrastructure investments such as planning, design, or construction during this time frame (Five-Year Spend), including \$1.9 billion in planned expenditures during FY21 (One-Year Spend). The remainder of the Five-Year Funding Available amount will allow key activities to progress—such as entering into design/build contracts and preparing for property acquisition—but may not result in direct expenditures on infrastructure investments before FY25.

Although stakeholders are planning an ambitious amount of capital investment in the corridor over the next five years, current funding available is insufficient. NEC stakeholders need approximately \$17.7 billion in additional funding to complete all planned work over the next five years (see Five-Year Funding Needed (Gap) in Figure 2); however, this figure may increase if currently anticipated funding is not realized. While investment in the corridor has increased in recent years with support from all partners, the COVID-19 pandemic has significantly worsened the prospects of that trend continuing without significant additional support from the federal government (see "Impact of COVID-19 on the FY21-25 Capital Investment Plan").

In looking beyond FY25, NEC funding needs are significant and growing. Through the CONNECT NEC 2035 program, stakeholders are developing a roadmap for eliminating the SOGR backlog and completing critical, capacity enhancing projects by 2035.

NEC Infrastructure Investments with Funding Available in FY21-25

NEC stakeholders plan to use available funding to help eliminate the state-of-good-repair backlog, strengthen partnerships, and set the stage for future transformative projects.

This section summarizes infrastructure investments—including sole-benefit, common-benefit, and third-party projects—to be undertaken with the \$16.2 billion in available funding by each agency over the next five years. Investment details, including funding, scope, and schedule information were provided by project coordinating agencies and right-of-way owners and are published in the Project Information Appendix starting on page 22.

Capital Renewal

Approximately \$4.3 billion is available in FY21-25 for capital renewal investments, or the routine repair or replacement of basic infrastructure assets (see Figure 4). As seen in Figure 3, NEC stakeholders plan to make almost \$3 billion available for track and structures investments, and another \$1.1 billion for electric traction and communications and signals.

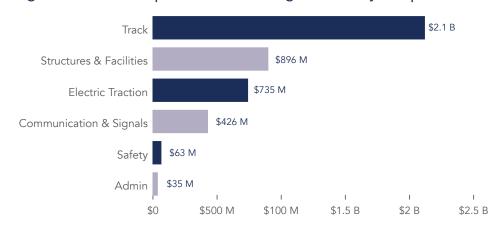


Figure 3. FY21-25 Capital renewal funding available by discipline


"Amtrak is planning to significantly ramp up its capital renewal investments over the next five years due to the completion of equipment purchases, including a new track laying system, two undercutters, five high-speed tampers, and one crane, during FY21 and FY22. The new equipment will allow Amtrak to complete more work in a more productive manner—resulting in greater efficiencies than we've been able to accomplish in the past.

Amtrak will focus on ramping up track investments, such as undercutting and surfacing, as well as renewing the corridor's electric traction system. These investments will result in an improved railroad for our passengers and commuter rail partners as we collectively recover from the devastating impacts of the COVID-19 pandemic."

- Gerhard Williams, Chief Engineer, Amtrak

Figure 4. Basic infrastructure assets

Basic infrastructure refers to infrastructure components that require annual renewal to keep the NEC's structures and systems functioning properly and in a state of good repair for safe train operations. On the right-of-way, this includes rails, ties, ballast, communication systems, electric traction power systems, undergrade bridges and other similar items.

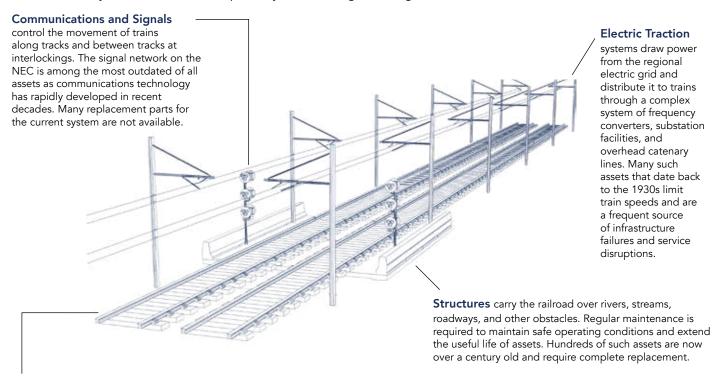

Track physically supports the movement of trains, including rail, concrete or wooden ties, a trackbed of crushed stone, and sub-layers designed to ensure proper drainage and prevent shifting of the railroad. Regular maintenance of such infrastructure is required to maintain safe operating conditions, prevent damage to train equipment, and promote comfortable ride quality.

In FY21-25, NEC partners plan to contribute approximately \$3.4 billion over the next five years toward capital renewal investments through Baseline Capital Charge obligations, as seen in Figure 5 below. An additional \$888 million in funding will be provided through right-of-way owners' capital programs, project-based cost allocation (see "Capital Cost Sharing on the NEC: Baseline Capital Charges and Project-based Cost Allocation" on page 11), or other sources, noted in Figure 5 as "Other capital funds".

Figure 5. FY21-25 Planned Capital Renewal Investment by Funding Source (\$M)

| | FY21 | FY22 | FY23 | FY24 | FY25 |
|---------------------------------------|-----------|-----------|-----------|-----------|-----------|
| Planned Capital Renewal Investment | \$803.6 M | \$763.1 M | \$847.8 M | \$919.3 M | \$938.5 M |
| Baseline Capital Charges ¹ | \$616 M | \$661 M | \$681 M | \$702 M | \$724 M |
| Other Capital Funds ² | \$188 M | \$102 M | \$167 M | \$217 M | \$214 M |

Notes: (1) FY21 BCC reflects FY21 preliminary adopted obligation. FY22-25 BCCs are an estimate based on FY21 obligation (approximately \$640 M at 100% normalized replacement) inflated by compound annual growth rate in NR between FY16 and FY21 as an assumption of yearover-year inflation. (2) Other capital funds generally include right-of-way owners' capital funds or project-based cost allocation.

Special Projects

In FY21-25, approximately \$11.9 billion is available for special projects (see Figure 7) on the NEC with approximately \$5.4 billion available for 13 major backlog projects and \$6.5 billion for 87 improvement projects. For complete five-year funding information for all special projects, see Appendix Figure 7 on page 152.

As seen in Figure 6, relatively few projects account for the bulk of funding that stakeholders identified as "available" for special projects during FY21-25. For instance, 15 out of 87 projects—including Washington Union Station projects, New Haven Line Yard & Facility Program, and NJ TRANSITGRID—account for over three-quarters of funding available (or \$5.1 billion) for improvement projects. Similarly, only three projects—the Hudson Tunnel Project¹, the Walk Bridge Program, and the Portal North Bridge project—make up \$5 billion of \$5.4 billion total funding available for major backlog projects. Notably, the Walk Bridge Program and the Portal North Bridge project do not need additional funding to undertake construction over the next five years.

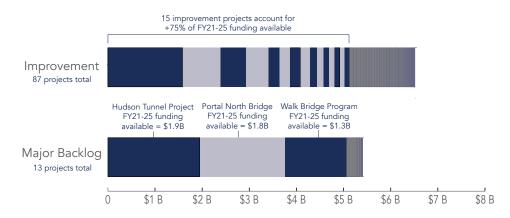


Figure 6. FY21-25 Special projects funding available by project type

Figure 7. Special projects

Special projects include "major backlog projects" which represent the complete overhaul or replacement of major bridges and tunnels, and "improvement projects" aimed at creating new infrastructure above and beyond existing assets or replacing existing structures with markedly superior ones. However, as special projects can be large and complex, some improvement projects may include state-of-good-repair elements and certain major backlog projects may include improvement components.




¹ Five year funding information for the Hudson Tunnel Project is per the financial plan for the Hudson Tunnel Project Capital Investment Grant application which has been submitted to FTA. Funding considered available by each modal administration at USDOT is subject to individual administration requirements.

Special projects are funded through a mix of federal, Amtrak, state, local, and commuter agency sources. Figure 8 below represents funding sources for special projects in this plan (as reported by coordinating agencies) and illustrates the relative contribution to special projects by each type of NEC stakeholder. The data includes funding sources for a special project's entire life cycle and not funding sources only available within the FY21-25 time frame.

For special projects in this plan, state, local, and commuter agency funding makes up over half of all project life cycle funding, while federal sources account for almost 33%. The federal category includes formula funding provided to commuter agencies and federal discretionary grant programs, such as the Capital Investment Grants program and Federal-State Partnership for State-of-Good-Repair Grant program. Examples of state, local, and commuter sources include transit agency fare box revenue and local tax revenue. Amtrak's funding makes up about 11% of all funding sources.

Figure 8. Special project life cycle funding by source type

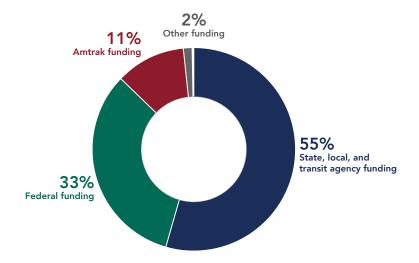

Capital Cost Sharing on the NEC: Baseline Capital Charges and **Project-based Cost Allocation**

Costs for common-benefit capital investments on the NEC are shared in one of two ways:

- Baseline Capital Charges: Operators pay right-of-way owners Baseline Capital Charges (BCCs) for their relative use of NEC infrastructure. Owners use BCCs to fund the capital renewal of right-of-way basic infrastructure assets. Each agency's BCC is determined as a percentage of the corridor's Normalized Replacement Amount and calculated annually through the NEC Cost Allocation Model.
- Project-based cost allocation: Common-benefit capital investments not funded by BCCs are subject to the Policy's project-based cost allocation method. The method and its associated project planning and coordination expectations establishes a framework for determining agency cost shares for specific capital investments based on relative use principles. For the first time, the status of agencies' projectbased cost allocation agreements was collected for special projects as part of the plan development process and can be found in the Project Information Appendix starting on page 156.

Capital Investments in FY21-25

NEC stakeholders plan to make progress toward shared goals for the corridor over the next five years.

Learn more about these investments and all planned capital investments in the Project Information Appendix starting on page 22. For details on FY21 specific investments, see page 14.

Station improvements to enhance customer experience and accessibility

Pawtucket/Central Falls Station is a new infill commuter rail station along MBTA's Providence Line and is anticipated to open in 2022. This project will provide Rhode Island's densest urban communities between Providence and Attleboro with access to commuter rail.

At **South Attleboro Station** in Massachusetts upgrades will be completed to ensure that the structures are accessible and compliant with modern building codes. Similar upgrades at **Ardmore Station** in Pennsylvania include accessible pathways, high-level platforms, and a new station building which will be complete in 2023.

Both Claymont and Newark Regional Transportation Centers in Delaware are expected to be complete by the end of 2022 and include ADA compliant designs to improve passenger safety and state-of-the-art amenities for customers. Additionally the upgrades at Newark Regional Transportation Center will eliminate conflicts with freight operations thereby increasing passenger convenience.



Partnerships to help eliminate the state of good repair backlog

The Federal-State Partnership for State of Good Repair grant program created by Congress and administered by the US Department of Transportation provides funding for capital projects to repair, replace, or rehabilitate railroad assets to reduce the state of good repair backlog and improve intercity passenger rail performance.

Construction to address reliability and resiliency issues at **Tower 1 Interlocking** near Boston South Station will be completed in the next five years. Tower 1 Interlocking is the railway "intersection" that provides operational flexibility for trains converging at South Station and distributes them to and from the station's platform tracks.

Final design and construction will be completed at **Providence Station**. An interior rehabilitation of the station will better meet the needs of today's travelers and create new intermodal connections.

210 catenary structures on the Hell Gate Line will be replaced to improve reliability of Amtrak's NEC services and to enable the broader **Penn Station Access** project, which will provide a one-seat ride on Metro-North to Penn Station New York.

Phase 1 work will be complete at **Zoo Interlocking** on the Connecting Corridor to Harrisburg, PA. Improvements at this interlocking will improve operational efficiencies, increase train speed and capacity, and decrease travel time. Phase 2 could be completed by 2024 if additional funding became available.





Track projects to improve operational performance of the railroad

The **Delaware Third Track Program**, which is currently in service but will complete project closeout no later than early 2021, will eliminate a current two-track bottleneck and increase capacity for intercity and commuter service between Wilmington and Newark, DE.

Design activities have begun for the **New Haven Line Track Speed Improvement Program**, which seeks to upgrade 3 miles of track near Bridgeport, CT. This includes the replacement of fixed undergrade bridges to improve track speed from 70mph to 90mph and for continued safe operation. Additional funding is needed for construction to begin within the next five years.

Construction is underway at **Fitter Interlocking**, a new, universal interlocking in Clinton, CT. The project will enable Shore Line East trains to use all platforms and tracks in the area, thereby allowing both Amtrak and Shore Line East to expand service while reducing train conflicts and resulting delays. Additional funding is needed to ensure that construction and final cut over of the interlocking could occur by 2023.






Setting the stage for future transformative projects

Large, transformative capital projects often require smaller, enabling projects to initially take place. The **Subbasement Program at Washington Union Station** is expected to be completed in 2025 and will support both the near- and long-term projects at the station. This state-of-good-repair work includes the reconstruction of Track 22 and will construct a new structural support system for the subbasement to ensure the station continues to meet growing demand for intercity and commuter rail services.

Some enabling components for the **Baltimore & Potomac Tunnel** replacement will be underway. A 2019 Federal-State Partnership for State of Good Repair Program grant will support the replacement of timber ties to concrete ties from Winans to Bridge interlockings. Additionally project partners plan to use available funding to support property acquisitions and to continue advancing design. However, additional funding is needed to complete all of the enabling components and the final design and construction of the tunnel itself.

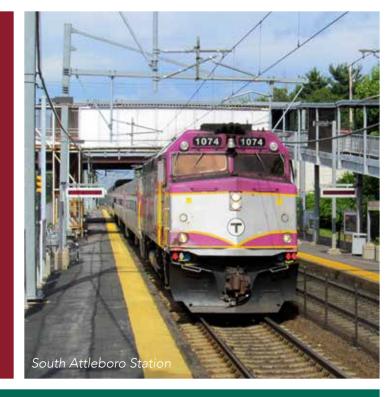



Momentum to address major backlog projects

In the next five years, the majority of the construction for the **Walk Bridge Program** is expected to be complete. The functionally obsolete 120-year-old bridge has experienced increasing deterioration of electrical and mechanical components. Construction requires extended continuous outages of two tracks where normally four are operational. This change in track availability could cause changes in schedule, decreases in reliability, or even reductions in service. Therefore initial capital projects such as the construction of CP243 interlocking and improvements at Dock Yard are underway to ensure that train operations can continue during construction. The construction of the replacement bridge is anticipated to begin in 2021 and completed in 2026.

In addition, construction for the **Portal North Bridge**, the first project within the Gateway Program, will be substantially underway, with expected completion in 2026. The existing Portal Bridge is a major bottleneck and source of train traffic delay due to its limited vertical clearance and openings for maritime traffic along the Hackensack River. According to NEC Commission analysis, routine bridge openings resulted in 1,000 delayed trains and 230 hours of train delay between 2014 and 2018. This project would replace the century-old swingspan bridge with a new two-track, fixed-span bridge, allowing a modest expansion of capacity. Once complete, the new bridge will save upwards of \$1.3 million annually in reduced maintenance and operating costs.



Preparing for the next generation of service

In 2021, Amtrak will launch the first of its new Acela trainsets which will allow for modest reductions in travel time with a top speed of 160mph in select locations. In preparation, the **Next Generation High Speed Fleet Infrastructure** set of projects will support service improvements throughout the corridor, in addition to upgrading maintenance facilities with the capability to service these trainsets.

Amtrak's investments in **Ride Quality** and **Safety Mitigation** will have benefits for all service operators on the corridor. A new reference surfacing system will ensure consistent track surface conditions which will improve the efficiency of maintenance processes and improve ride quality. New security fencing and guardrails will enable safer conditions for service operators.

Additional investments to the maintenance facilities at Amtrak's **Ivy City** (DC), **Sunnyside** (NY) and **Southampton St.** (MA) Yards are necessary to support these new trainsets which enable reliable, high-speed inter-city passenger service between Boston and Washington D.C.



FY21 Planned Investments

Year One of the Capital Investment Plan serves as an implementation plan for NEC stakeholders and the baseline for quarterly capital program delivery reporting and the NEC Annual Report. FY21 plan information reflects anticipated capital project activity in the upcoming federal fiscal year based on available capital funding. In FY21, NEC stakeholders plan to spend a total of \$1.9 billion on infrastructure investment on the NEC.

See the Project Information Appendix starting on page 22 for FY21 scope, schedule, and budget details for all FY21 capital renewal and special project investments and more details on FY21 BCC spending.

FY21 Capital Renewal Highlights: Regional Overview



Attleboro Line

MBTA is the right-of-way infrastructure owner for this region, which includes the NEC Main Line in the Commonwealth of Massachusetts.

FY21 Planned Capital Renewal Investment: \$24 M

Planned investment highlights in this region include \$3.2 M in upgrades to the Train Approach Message Sign (TAMS) systems at 5 stations, installing 21,000 feet of power, express and communication cable between Read and Forest interlockings, and advancing the South Station Tie and Rail Replacement Project with upgrades to 1,500' concrete guardrail ties and replacement of ballasts on Tracks 1 and 2 at South Station.



New England

Amtrak is the right-of-way infrastructure owner for this region, which includes a portion of the NEC Main Line in Rhode Island and Connecticut; and the Connecting Corridor from New Haven, CT to Springfield, MA.

FY21 Planned Capital Renewal Investment: \$66 M

Major investments in the region include a \$4.8 M project replacing one channel of the Shaws Cove Swing Bridge in FY21 and beginning the second, and investments in turnout renewal, spot surfacing, undercutting, and constant tension catenary hardware renewal.



New Jersey - New York

Amtrak is the right-of-way infrastructure owner for this region, which includes a portion of NEC Main Line in New York and New Jersey; and the Connecting Corridor from New York Penn Station to Spuyten Duyvil, NY.

FY21 Planned Capital Renewal Investment: \$169 M

Major investments in this region include a \$29.2 M investment in infrastructure renewal at Penn Station New York including rehabilitation of Tracks 7, 9 and 12 and the replacement of 9 switches; \$7 M in replacement upgrades to Q Interlocking; and a \$21 M investment in constant tension catenary upgrades between Clark and Ham Interlockings.



Mid-Atlantic South

Amtrak is the right-of-way infrastructure owner for this region, which includes the NEC Main Line in Maryland and the District of Columbia.

FY21 Planned Capital Renewal Investment: \$86 M

Major investments in this region include \$16 M towards replacement of over 1,000' of slab track, block ties, and rail on Tracks 2 and 3 in the Baltimore & Potomac Tunnel, TLS concrete tie replacement between Bridge and Grove Interlockings on Track 2, and upgrades to culverts, tunnels, retaining walls, and bridges in Maryland.



Boston, MA

Providence,

Springfield,

3

New Haven Line

Connecticut DOT and Metro-North Railroad are the right-of-way infrastructure owners for this region, which includes the portion of the NEC Main Line from New Haven, CT to New Rochelle, NY.

FY21 Planned Capital Renewal Investment: \$150 M

Major investments in this region include \$20 M towards completing construction and beginning catenary modifications on the Atlantic Street Bridge in CT and \$9 M towards continuing construction efforts on the Willet Avenue and Highland Road Bridges in NY.

5

Mid-Atlantic North

Amtrak is the right-of-way infrastructure owner for this region, which includes a portion of the NEC Main Line in Pennsylvania and Delaware; and the Connecting Corridor from Philadelphia 30th Street Station to Harrisburg, PA.

FY21 Planned Capital Renewal Investment: \$154 M

Major investments in this region include advancing work on the Philadelphia 30th Street Station facade restoration project, a \$9.6 M investment at the Newark and Davis Interlockings in DE, as well as investments in turnout renewal and concrete tie replacement using the track laying system (TLS).



Amtrak System-wide

Amtrak system-wide investments include investments which benefit the entire Amtrak-owned territory or do not fall into a single geographic region.

FY21 Planned Capital Renewal Investment: \$155 M

Major investments include software upgrades, completing remaining tasks associated with installing PTC, and \$68 M toward heavy equipment acquisition such as undercutting machines, ballast cars, and cranes.

Moynihan Station: Phase 2

This project expands passenger-handling operations and station services into the historic James A. Farley Post Office building, which will function as the Movnihan Train Hall for Amtrak and Long Island Rail Road passengers.

This new joint facility will serve as a worldclass intercity and commuter passenger boarding concourse with a sky-lit atrium, a combined ticketing and baggage unit and a new metropolitan lounge for Amtrak customers, an emergency platform ventilation system at the perimeter of the Farley building, and improvements to the 33rd Street sub-street corridor connecting Penn Station and Moynihan Station.

In FY21, focus will be on construction completion and activation activities for the opening of the new \$1.66 B Moynihan Train Hall to passengers.

Learn more about this project on page 192.



Ruggles Street Station Accessibility Improvements: Phase 1

This \$38.9 M project will construct a new platform and make other improvements at Ruggles Station to enable all inbound and outbound MBTA trains to serve the station and to increase system capacity along this segment of the NEC. The project will improve accessibility by upgrading the existing elevators and adding one new elevator in the lower busway, and make interior and exterior repairs to bring the station to code. A TIGER grant partially funds this project, which is part of a larger initiative to modernize the Ruggles Station, but requires additional funding for full construction.

Today, more than 30 percent of inbound trains bypass Ruggles Station, requiring more than 500 inbound passengers to transfer at Back Bay Station, then backtrack to Ruggles, commonly known as the "Back Bay Detour." The new platform will provide service improvements for the MBTA Commuter Rail passengers and add operational flexibility for MBTA Commuter Rail and Amtrak.

In FY21, the focus will be on construction completion. The \$26.5 M Phase 2 project will begin upon completion of Phase 1.

Learn more about this project on page 264.

FY21 Special Projects Highlights: **Projects Nearing Completion**

Total FY21 Planned Special Projects Investment

Maryland Section Reliability **Improvements**

This \$20.6 M project will upgrade 30 miles of Track 1 in Maryland and make associated signal system and track upgrades for higher speed operations on the Washington-to-Baltimore section of the NEC.

This segment operates at or near capacity today and is unable to reliably absorb increases in service without additional infrastructure improvements. This project targets reductions in congestion-related delays and provides new overtake capacity between different classes of service (highspeed, conventional, and commuter), allowing the faster, high-speed trains to pass slower trains.

In FY21, focus will be on construction completion of the communications and signal systems which includes Positive Train Control

Learn more about this project on page 190.



New Brunswick Station Improvements

This \$21.3 M project will extend the current eastbound platform at New Brunswick Station by approximately 230 feet. The station is slated to undergo significant rehabilitation of its exterior brick facade; installation of new lighting, windows, HVAC system, and escalator; and painting.

In FY21, the focus will be continuing work on the pedestrian walkway overpass, elevator rehabilitation, escalator replacement, eastbound platform extension, and station repairs. Construction is estimated to be completed in 2022.

Learn more about this project on page 300..



Middletown Station

This project will modernize the Middletown, PA Station which serves Amtrak's Keystone Corridor passengers along the Harrisburg Line. This Pennsylvania DOT-led project will provide ADA access with high-level boarding platforms, improved and expanded parking, and multimodal connections. This project will improve the passenger experience and lead to community and economic development.

In FY21, focus will be on construction completion and project close-out. This \$44 M investment was funded through the Federal Transit Administration's formula grant programs with a local match provided by the Commonwealth of Pennsylvania.

Learn more about this project on page 326.



East River Tunnels: RoW Infrastructure Improvements

This \$88.5 M project includes several initiatives in the East River Tunnels. The project consists of mitigation of stray electric current in the tubes, an improved radio system in the tunnels and on the platforms at Penn Station New York, and renewal of track and track-bed infrastructure in tunnels 3 & 4. These projects will improve reliability and reduce delays and maintenance costs by replacing and/or upgrading existing equipment. These projects will enable a two-phased future rehabilitation project also described in this

In FY21, the focus will be to continue antenna replacement in tunnels 3 and 4 and the total replacement of Track 4. This project is estimated to complete construction in 2022.

Learn more about this project on page 270.

NEC Infrastructure Investments with Funding Needs during FY21-25

Available funding is insufficient to accomplish all planned investments during FY21-25, some of which—such as the replacement of Baltimore & Potomac (B&P) Tunnel in Maryland—are essential to ensuring the long-term viability of the NEC.

In addition to the planned investments described in the previous section, this document also identifies investments which could occur in the next five years if additional funding were made available while bearing in mind constraints such as workforce resources, available track time, and project readiness. As seen in Figure 9, NEC stakeholders need over \$17 billion in additional funding to complete all necessary work identified over the next five years.

Figure 9. Summary of Funding Available and Needed During FY21-25

| | FY21-25 Funding Available | FY21-25 Funding Needed | Total |
|--|------------------------------|---------------------------|-----------|
| Capital Renewal of Basic Infrastructure ¹ | \$4.27 B | \$1.09 B | \$5.36 B |
| Special Projects ² | \$8.10 B | \$3.91 B | \$12.01 B |
| Major Backlog | \$1.64 B | \$1.92 B | \$3.56 B |
| Improvement | \$6.46 B | \$1.99 B | \$8.45 B |
| Special Projects: Gateway Program | \$3.81 B | \$12.66 B | \$16.48 B |
| Major Backlog | \$3.76 B | \$12.48 B | \$16.24 B |
| Improvement | \$0.05 B | \$0.18 B | \$0.24 B |
| Total | \$16.18 B | \$17.65 B | \$33.85 B |

Notes: Figures above may slightly differ due to rounding. (1) Capital renewal funding available is reported by each right-of-way owner. Each owner's capital renewal plan can be found in the Project Information Appendix starting on page 22. Capital renewal funding needed is an estimate based on the difference between the updated annual normalized replacement amount and planned capital renewal spending. (2) Special projects funding available and needed figures are reported by the agencies. The reported values for each special project can be found in the Project Information Appendix. Special project figures provided by Connecticut DOT represent programmed amounts, not planned expenditures.

Capital Renewal

As discussed on page 9, right-of-way owners plan to increase spending on capital renewal each year during the five-year time frame with a total of \$4.27 billion funded through a mix of Baseline Capital Charges and other capital sources. However, right-of-way owners generally do not identify specific scopes of work for capital renewal investments that lack funding, workforce, equipment, or track time.

That does not mean additional funding for capital renewal is not needed, nor that feasible plans could not be developed to spend it. Estimates of an unfunded need for capital renewal can be developed at a conceptual, corridor-wide level. The Commission is working to update the "normalized replacement amount" for the corridor—or the annual cost of sustaining basic infrastructure assets in a state of good repair based on the count, average useful life, and unit cost for each asset type.

This exercise has indicated, preliminarily, that the new normalized replacement amount is notably higher than the figure previously estimated, and also higher than the total planned spending on capital renewal investments each year through FY25. Comparing best available data on the cost of sustaining a state of good repair to planned spending for FY22-FY25 suggests that the unfunded need to fill this gap is estimated to be approximately \$1 billion, and potentially higher if NEC stakeholders reduce their spending due to COVID-related budget crises or seek to reduce the SOGR backlog at a more aggressive pace.

While increasing the level of capital renewal investment on the corridor is an important goal, spending \$1 billion or more annually on these labor and track-outage-intensive activities would likely necessitate not just robust funding levels, but also new strategies related to equipment deployment, workforce levels, and project delivery. As part of the CONNECT NEC 2035 program, NEC stakeholders are analyzing future workforce needs and potential project delivery strategies that could position right-of-way owners to increase their annual spending on capital renewal investments without additional impacts to service levels and NEC passengers if funding is available.






Special Projects

Of the 100 special projects in this plan, 40 are partially funded and 18 are entirely unfunded. As seen in Figure 9, over \$16 billion is needed over the next five years to continue advancing work on partially funded special projects and initiate work on completely unfunded special projects.

Figure 10. FY21-25 special projects by funding status

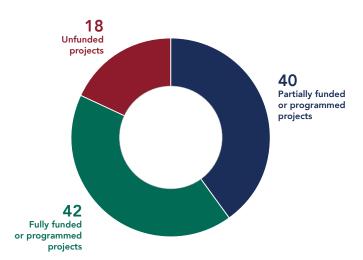

Of that amount, over \$14 billion is still needed to advance major backlog projects in FY21-25. For instance, Amtrak has made \$9.5 million available to reach 60% final design for the B&P Tunnel project within the next five years. Yet if \$466 million in additional funding were made available, project partners could complete final design and right-of-way acquisition and begin construction of the tunnel proper.

This life support model of funding major backlog projects is not unique to the B&P Tunnel project (see "Amtrak Future Funding Assumptions" on page 19). Although Amtrak

has committed approximately \$12 million toward the Connecticut River Bridge Replacement and the East River Tunnel Rehabilitation projects during FY21-25, an additional \$1 billion is needed to complete planned work for both projects, which includes construction initiation and final design, respectively.

Perhaps most importantly, Hudson Tunnel Project, the second most advanced major backlog project to be undertaken as part of the Gateway Program after Portal Bridge, requires an additional \$11.65 billion in funding, which has been proposed through the FTA Capital Investment Grant and FRA RRIF loan programs. This funding, along with the \$2 billion already committed by project partners, would allow partners to complete property acquisition and commence major construction in the next five years. Meanwhile, an additional \$800 million toward Sawtooth Bridge Replacement would allow stakeholders to complete preliminary engineering and final design and initiate construction of this Gateway Program project.







"Though we are pleased that some major NEC projects, such as Walk Bridge in Connecticut and Portal North Bridge in New Jersey, have sufficient funding to proceed with construction during the next five years, several other critical projects—including Connecticut River Bridge—remain stalled due to lack of funding availability. In these difficult budget times, federal funding is essential to advance these projects not only to help the corridor reach a state-of-good-repair, but also to help spur economic growth and provide much needed jobs throughout the region."

- Joseph Giulietti, Commissioner, Connecticut DOT

In addition to the major backlog projects that have an unfunded need during FY21-25, the NEC requires an additional \$2.2 billion in funding to advance improvement projects to increase train capacity and improve access to rail. These projects include station projects which would improve the customer experience, infrastructure investments which would alleviate bottlenecks to increase capacity and future service, and state-of-good-repair work which would improve operational efficiency.



If funded, this project would include installing a fifth track (Track 5) along the NEC in North Brunswick, which would continue onto a new viaduct structure that loops over the NEC right-of-way and enters back onto inbound Track 1. This track and flyover would eliminate the need for eastbound trains from Jersey Avenue Station to move on the NEC from Track 4 to Track 1. The Midline Loop project would have substantial operational benefits for both NJ TRANSIT and Amtrak, as it would mitigate operational delays for both agencies, improve on-time performances, reduce congestion, and provide muchneeded capacity augmentation.



MTA received a Federal-State Partnership SOGR grant for rehabilitation of two platforms, but significant additional funding is needed to fully transform Penn Station, work that's being planned jointly by MTA, Amtrak, and NJ TRANSIT. The work being planned will address the station's deficiencies, improve passenger flow, and identify options to unify the existing Penn Station with the Moynihan Train Hall and a future expansion of the station, which is part of the Gateway Program.



Funding is needed to advance critical projects on the Harrisburg Line to replace functionally obsolete interlockings. Seven interlockings will need to be replaced or rebuilt as outlined in a conceptual design effort by PennDOT, SEPTA, and Amtrak to reconfigure the system. Additional funding for these projects would allow for the modernization of service and infrastructure on this segment of the NEC.

Amtrak Future Funding Assumptions

Efficient capital investment requires predictable, multi-year funding streams from which planners and engineers can systematically advance individual projects through various stages of development. Among NEC agencies, Amtrak, in particular, lacks such funding streams as the company relies primarily on annual appropriations from Congress to support its NEC and National Network operations.

Although Amtrak's annual appropriations have been fairly stable over the past five years, its appropriations have fluctuated significantly over the past few decades and the COVID-19 pandemic may upend recent stability. This lack of predictable and consistent funding has hampered Amtrak's ability to develop and adhere to multi-year capital plans. As a result, Amtrak currently relies more heavily on annual capital investment plans than multi-year plans; populates its plans with "life support" investments for many major backlog projects; and often assumes no funding is available or likely to be available for these and other special projects beyond the upcoming fiscal year (see Appendix Figure 7 on page 152).

This plan indicates that Amtrak has an unfunded need of \$14.5 billion for its special projects during the FY21-25 time frame. However, given current practices and the limited use of future funding assumptions, it is likely that Amtrak's annual appropriations for FY22 through FY25 will cover some portion of this unfunded need.

The NEC State-of-Good-Repair Backlog

The NEC state-of-good-repair (SOGR) backlog refers to the population of infrastructure assets on the NEC that are beyond their useful life. An asset's useful life can vary from a few years to many decades, after which they should be replaced. Some assets can operate safely beyond their useful life, though they become more expensive to maintain and more vulnerable to failures that cause service disruptions. Each year the SOGR backlog goes unaddressed it continues to grow, and failure to fully address the SOGR backlog would make it impossible to sustain existing NEC services.

Based on currently available data, the Commission estimates that addressing the entire NEC SOGR backlog would cost \$42 billion over the span of many years, beyond the time frame of this plan. As summarized in Figure 11, this figure is based on the estimated replacement value of existing right-of-way basic infrastructure assets (\$11.6 billion) and the estimated total project cost of major backlog projects (\$30.6 billion). Amtrak's 2013 State-of-Good-Repair Report is used to develop the estimated replacement value for right-of-way basic infrastructure assets and major backlog project costs are provided by project sponsors and updated each year through the NEC capital planning process. However, in some cases, total project cost estimates include costs for work that has already been completed and costs for improvement components (which are not considered part of the SOGR backlog).

While imperfect, the \$42 billion SOGR backlog estimate conveys the scope of the backlog problem and the massive undertaking it will be to fully address the backlog. The Commission has several efforts underway that will help refine the SOGR backlog estimate—including its asset assessment update, which will refresh the normalized replacement values for right-of-way basic infrastructure assets, and the CONNECT NEC 2035 program. In addition, the Commission plans to report on its progress in assessing and eliminating the NEC SOGR backlog in future NEC Annual Reports.


Figure 11. The NEC's state-of-good-repair backlog



\$11.6 BBasic infrastructure backlog



Major backlog



| Basic Infrastructure Assets | Replacement Value ¹ |
|------------------------------------|-----------------------------------|
| Track | \$1,500 M |
| Structures | \$8,200 M |
| Communications and Signals | \$700 M |
| Electric Traction | \$1,200 M |
| Basic Infrastructure Backlog Total | \$11,600 M |

Note for basic infrastructure backlog: (1) Basic infrastructure backlog replacement values are provided by the right-of-way owners. For Amtrak, estimates are based on a 2013 State-of-Good-Repair Assessment.

Notes for major backlog projects: (2) Some major backlog projects combine elements of new capacity with the replacement of existing structures. Full details can be found in the Project Information Appendix. (3) Total project cost as provided by the infrastructure owner/ coordinating agency. Figures are order of magnitude estimates, as some projects are in the early stages of development. Actual construction estimates may change substantially. Total project cost estimates may fluctuate between plans when projects advance design. (4) These projects do not have any funding available or needed in FY21-25 due to resource constraints and/or project sequencing so are not included in this plan. For all other major backlog projects, details can be found in the Project Information Appendix starting on page 22.

| Majo | r Backlog Projects² | Total Project Cost³ | | | |
|------|--------------------------------|------------------------|--|--|--|
| СТ | Connecticut River Bridge | \$432 M | | | |
| | Devon Bridge | \$1,100 M | | | |
| | Saugatuck Bridge | \$350 M | | | |
| | Walk Bridge Program | \$1,307 M | | | |
| | Cos Cob Bridge ⁴ | \$1,000 M | | | |
| NY | Pelham Bay Bridge | \$496 M | | | |
| | East River Tunnel | \$1,647 M | | | |
| NJ | Gateway: Hudson Tunnel Project | \$13,598 M | | | |
| | Gateway: Portal North Bridge | \$1,803 M | | | |
| | Gateway: Sawtooth Bridge | \$1,600 M | | | |
| | Gateway: Highline Renewal⁴ | \$300 M | | | |
| MD | Susquehanna River Bridge | \$1,885 M | | | |
| | Bush River Bridge⁴ | \$400 M | | | |
| | Gunpowder River Bridge⁴ | \$550 M | | | |
| | Baltimore & Potomac Tunnel | \$4,595 M | | | |
| Majo | Major Backlog Total \$30,607 M | | | | |

Funding Needed beyond FY21-25

NEC funding needs beyond FY25 are significant and growing; through the CONNECT NEC 2035 program, stakeholders are developing a roadmap and vision for eliminating the SOGR backlog and completing critical, capacity enhancing projects by 2035.

Although NEC stakeholders are attempting to maximize currently available workforce, equipment, and track outage resources to accomplish an ambitious amount of capital investment in the corridor during the next five years, the current pace of investment will not eliminate the state-of-good-repair backlog in the mediumterm (i.e., the next 10 to 20 years). Several major backlog projects including Pelham Bay, Susquehanna, Bush, and Saugatuck River Bridges—will see little to no investment occurring over the next five years due to lack of funding and other resources. Each year that the level of capital renewal investment falls below normalized replacement, the basic infrastructure backlog grows.

"Although the pandemic has created tremendous uncertainty for our industry, it has not changed the imperative to bring the Northeast Corridor to a state of good repair and lay a foundation for growth once the current crisis eases and life returns to normal. It is our hope and expectation that the advancement of NEC capital investments will play an important role in supporting the industry's recovery and energizing the regional economy."

> - Kevin Corbett, **Executive Director, NJ TRANSIT**

Beyond the SOGR backlog, several improvement projects identified by stakeholders as critical to the future of the corridor, for example BWI Fourth Track and Boston South Station Expansion projects, are not advancing during this time frame, but will have significant funding needs in the future. These delayed improvement projects and the SOGR backlog suggest a funding need for the corridor that far exceeds the numbers cited in this plan.

Accomplishing all NEC investment goals in the medium term will not only require significantly higher and sustained funding levels, but also more efficient and better coordinated project delivery and sequencing strategies. The Commission is facilitating the development of CONNECT NEC 2035, a roadmap for NEC stakeholders to collectively support addressing both challenges:



- Alternative funding paradigm: As seen throughout this Capital Investment Plan, NEC stakeholders often rely on a piecemeal approach to funding major capital investments due to a lack of dedicated and consistent funding streams for intercity and commuter rail projects. Unfortunately, this piecemeal approach contributes to project delays and inefficiencies. The lack of consistent funding also impacts agencies' abilities to start pre-construction activities which in turn impacts the pipeline of shovel ready projects. As part of CONNECT NEC 2035, the Commission is developing a detailed funding proposal which will recommend a dedicated, consistent federal-state funding paradigm to fund capital projects on the NEC.
- Project delivery and sequencing: To date, all NEC Capital Investment Plans, including this plan, have reflected the project sequencing strategies and resource assumptions made by individual agencies. CONNECT NEC 2035 will provide a unified blueprint for sequencing all capital investments that maximizes productivity of resource allocations and track outages while advancing a shared long-term vision for the NEC. It is expected that CONNECT NEC 2035 will help inform project sequencing, delivery strategies, and resource assumptions reflected in future NEC Capital Investment Plans.

Project Information Appendix

Capital Renewal

FY21 Capital Renewal Summary

Capital Renewal Investments and Baseline Capital Charges

Service operators pay right-of-way owners Baseline Capital Charges (BCCs) for their relative use of NEC infrastructure. Each operator's BCC is determined as a percentage of the corridor's Normalized Replacement Amount and calculated annually through the NEC Cost Allocation Model. Following eligibility criteria outlined in the Cost Allocation Policy, owners use BCCs to fund the capital renewal of basic infrastructure. For this plan, owners identified whether investments included in their capital renewal plans were BCC-eligible. Appendix Figure 1 below shows each owner's anticipated FY21 capital renewal expenditure according to BCC-eligibility.

Appendix Figure 1. FY21 capital renewal investments by BCC-eligibility

| | Amtrak | MBTA | CTDOT | MNR | Total |
|----------------------------|---------------|--------------|---------------|--------------|---------------|
| Capital renewal investment | \$628,974,400 | \$24,211,887 | \$131,200,000 | \$19,200,000 | \$803,586,287 |
| BCC eligible | \$487,919,790 | \$24,211,887 | \$131,200,000 | \$19,200,000 | \$662,531,677 |
| BCC ineligible | \$141,054,610 | | | | \$141,054,610 |

In general, the Policy requires right-of-way owners to invest operators' BCCs on eligible assets within the operators' service territories during the fiscal year the BCCs are provided. Appendix Figure 2 shows the BCC-eligible expenditures planned for FY21 that are within, or provide benefit to, each operator's territory, and Appendix Figure 3 shows FY21 BCC obligations.

Appendix Figure 2. FY21 Planned BCC-eligible Capital Renewal Expenditure by Operator and Owner Territory

| | | RoW Owner Territory | | | | | |
|------------------------------------|---------------|---------------------|---------------|--------------|---------------|--|--|
| Service Operator | Amtrak | МВТА | CTDOT | MNR | Total | | |
| Amtrak | \$307,145,175 | \$6,541,210 | \$17,114,900 | \$2,526,015 | \$333,327,299 | | |
| MBTA | \$1,595,049 | \$17,670,677 | | | \$19,265,726 | | |
| Rhode Island DOT | \$2,162,417 | | | | \$2,162,417 | | |
| CTDOT (Shore Line East) | \$4,537,484 | | \$1,074,478 | | \$5,611,962 | | |
| CTDOT (Hartford Line) ¹ | \$6,581,618 | | \$225,275 | | \$6,806,893 | | |
| CTDOT (New Haven Line) | | | \$112,785,347 | | \$112,785,347 | | |
| MTA Metro-North Railroad | | | | \$16,673,985 | \$16,673,985 | | |
| MTA Long Island Rail Road | \$8,383,536 | | | | \$8,383,536 | | |
| NJ TRANSIT | \$92,578,464 | | | | \$92,578,464 | | |
| SEPTA | \$43,316,184 | | | | \$43,316,184 | | |
| Delaware DOT | \$2,748,695 | | | | \$2,748,695 | | |
| Maryland DOT | \$18,233,967 | | | | \$18,233,967 | | |
| Virginia Railway Express | \$637,199 | | | | \$637,199 | | |
| Total | \$487,919,787 | \$24,211,887 | \$131,200,000 | \$19,200,000 | \$662,531,675 | | |

Appendix Figure 3. FY21 BCC Obligations by Operator and Owner Territory

| Service Operator | Amtrak | МВТА | СТДОТ | MNR | Total |
|--|---------------|--------------|--------------|--------------|---------------|
| Amtrak | \$283,910,982 | \$10,782,411 | \$17,114,900 | \$2,526,015 | \$314,334,307 |
| MBTA | \$1,595,049 | \$17,670,677 | | | \$19,265,726 |
| Rhode Island DOT | \$2,162,417 | | | | \$2,162,417 |
| CTDOT (Shore Line East) | \$4,537,484 | | \$1,074,478 | | \$5,611,962 |
| CTDOT (Hartford Line) | \$6,581,618 | | \$225,275 | | \$6,806,893 |
| CTDOT (New Haven Line) | | | \$49,221,409 | | \$49,221,409 |
| MTA Metro-North Railroad | | | | \$13,767,295 | \$13,767,295 |
| MTA Long Island Rail Road ¹ | \$27,213,858 | | | | \$27,213,858 |
| NJ TRANSIT ² | \$92,578,465 | | | | \$92,578,465 |
| SEPTA | \$43,316,183 | | | | \$43,316,183 |
| Delaware DOT | \$2,748,695 | | | | \$2,748,695 |
| Maryland DOT | \$18,233,967 | | | | \$18,233,967 |
| Virginia Railway Express | \$637,199 | | | | \$637,199 |
| Total | \$483,515,917 | \$28,453,088 | \$67,636,062 | \$16,293,310 | \$595,898,377 |

Notes: (1) Long Island Rail Road's obligation is subject to revision based on actual expenditures per Amtrak-LIRR agreement. (2) NJ TRANSIT's FY21 BCC obligation reflects the NJ TRANSIT-Amtrak BCC variance for Portal North Bridge, approved by the Commission in August 2019.

A key purpose of this plan is to facilitate an exchange of information between right-of-way owners and operators regarding the owners' ability to spend operators' BCCs during the upcoming fiscal year. To that end, Appendix Figure 4 shows the difference between owners' planned FY21 BCC-eligible expenditures and agencies' FY21 BCCs.

The FY21 capital renewal plans submitted by Connecticut DOT and Metro-North Railroad indicate that the agencies will spend all BCCs provided for their territories. Amtrak's FY21 plan indicates that the agency will spend all BCCs provided for its territory, except for those provided by Long Island Rail Road. However, Long Island Rail Road's annual capital obligation is based on actual expenditures per its agreement with Amtrak. MBTA's capital renewal plan does not indicate that all BCCs provided for its territory will be spent during FY21. However, MBTA plans to spend approximately \$11 million on the Special Project "Tower 1 Interlocking" (see pg. 260) during FY21. As all of the planned work on Tower One is considered BCC-eligible, MBTA can put any remaining FY21 BCCs towards that project, if needed.

In addition, for all agencies, the data provided represents a snapshot in time and actual work completed during FY21 and funded with BCCs may vary.

Appendix Figure 4. FY21 Planned BCC-eligible Capital Renewal Expenditure and BCC Obligation Comparison

| Service Operator | Amtrak | MBTA ² | CTDOT | MNR | Total |
|--|----------------|-------------------|--------------|-------------|----------------|
| Amtrak | \$23,234,193 | (\$4,241,201) | \$0 | \$0 | \$18,992,992 |
| MBTA | \$0 | | | | \$0 |
| Rhode Island DOT | \$0 | | | | \$0 |
| CTDOT (Shore Line East) | \$0 | | | | \$0 |
| CTDOT (Hartford Line) | \$0 | | | | \$0 |
| CTDOT (New Haven Line) | | | \$63,563,938 | | \$63,563,938 |
| MTA Metro-North Railroad | | | | \$2,906,690 | \$2,906,690 |
| MTA Long Island Rail Road ¹ | (\$18,830,322) | | | | (\$18,830,322) |
| NJ TRANSIT | (\$1) | | | | (\$1) |
| SEPTA | \$1 | | | | \$1 |
| Delaware DOT | \$0 | | | | \$0 |
| Maryland DOT | \$0 | | | | \$0 |
| Virginia Railway Express | \$0 | | | | \$0 |
| Total | \$4,403,871 | (\$4,241,201) | \$63,563,938 | \$2,906,690 | \$66,633,298 |

Notes: Figures above may slightly differ due to rounding. (1) Long Island Rail Road's obligation is subject to revision based on actual expenditures per Amtrak-LIRR agreement. (2) MBTA is planning to spend \$11M on BCC-eligible work as part of the Tower 1 Interlocking project (see page 260) which may be funded with remaining BCCs.

BCC Segments

To determine if right-of-way owners plan to invest operators' BCCs within their respective service territories, the corridor is divided into 31 BCC segments generally defined as points on the NEC where the mix of owners and/or operators changes. Each segment then has a distinct set of operators whose BCCs may be applied to fund BCC-eligible capital renewal investments.

Appendix Figure 5. Owner and Operators by BCC Segment

| BCC Segment | Owner | Operators |
|--|--------|--|
| 1. Boston South Station to MA/RI State Line | MBTA | Amtrak, MBTA |
| 2. MA/RI State Line to Providence | Amtrak | Amtrak, MBTA |
| 3. Providence to Wickford Junction | Amtrak | Amtrak, MBTA (on behalf of RIDOT) |
| 4. Wickford Junction to New London | Amtrak | Amtrak |
| 5. New London to New Haven | Amtrak | Amtrak, CT <i>rail</i> Shore Line East |
| 6. New Haven to CT/NY State Line | CTDOT | Amtrak, MNR (on behalf of CTDOT) |
| 7. CT/NY State Line to New Rochelle | MNR | Amtrak, MNR |
| 8. New Rochelle to Harold | Amtrak | Amtrak |
| 9. Harold to F Interlocking | Amtrak | Amtrak, LIRR |
| 10. F Interlocking to Penn Station New York | Amtrak | Amtrak, LIRR, NJT |
| 11. Penn Terminal | Amtrak | Amtrak, LIRR, NJT |
| 12. Penn Station New York to Trenton | Amtrak | Amtrak, NJT |
| 13. Trenton to Morris | Amtrak | Amtrak, NJT, SEPTA |
| 14. Morris to Holmes | Amtrak | Amtrak, SEPTA |
| 15. Holmes to Shore | Amtrak | Amtrak, SEPTA |
| 16. Shore to Girard | Amtrak | Amtrak, NJT, SEPTA |
| 17. Girard to Philadelphia 30th Street | Amtrak | Amtrak, NJT |
| 18. Philadelphia 30th Street to Arsenal | Amtrak | Amtrak |
| 19. Arsenal to Marcus Hook | Amtrak | Amtrak, SEPTA |
| 20. Marcus Hook to Bacon | Amtrak | Amtrak, SEPTA (on behalf of DelDOT) |
| 21. Bacon to Perryville | Amtrak | Amtrak |
| 22. Perryville to WAS | Amtrak | Amtrak, MARC |
| 23. Washington Union Terminal | Amtrak | Amtrak, MARC, VRE |
| 24. WAS to CP Virginia | Amtrak | Amtrak, VRE |
| 25. Springfield to New Haven | Amtrak | Amtrak, CTrail Hartford Line |
| 26. Poughkeepsie - Spuyten Duyvil (exempt from plan) | MNR | Amtrak, MNR |
| 27. Spuyten Duyvil to Penn Station New York | Amtrak | Amtrak |
| 28. Penn to 36th Street | Amtrak | Amtrak |
| 29. 36th Street to Thorndale | Amtrak | Amtrak, SEPTA |
| 30. Thorndale to Harrisburg | Amtrak | Amtrak |
| 31. Amtrak System-wide | Amtrak | Amtrak |

Appendix Figure 6. FY21 BCC-eligible capital renewal by segment

The following table shows each owner's planned BCC-eligible capital renewal expenditure by operator territory. Details on each owner's BCC-eligible investments can be found in each FY21-25 Capital renewal plan by owner. Investment detail by BCC segment can be found at: **nec-commission.com/fy21-25-cip**

| BCC Segment | Owner | Amtrak | МВТА | RIDOT | CTDOT (SLE) | CTDOT (HL) | CTDOT (NHL) |
|-------------|--------|---------------|--------------|-------------|----------------|---------------|----------------|
| 1 | MBTA | \$6,541,210 | \$17,670,677 | | | | |
| 2 | Amtrak | \$5,545,578 | \$1,595,049 | | | | |
| 3 | Amtrak | \$1,458,895 | | \$2,162,417 | | | |
| 4 | Amtrak | \$8,100,455 | | | | | |
| 5 | Amtrak | \$10,266,185 | | | \$4,537,484 | | |
| 6 | CTDOT | \$17,114,900 | | | \$1,074,478 | \$225,275 | \$49,221,409 |
| 7 | MNR | \$2,526,015 | | | | | |
| 8 | Amtrak | \$5,005,377 | | | | | |
| 9 | Amtrak | \$13,848,242 | | | | | |
| 10 | Amtrak | \$4,460,351 | | | | | |
| 11 | Amtrak | \$28,975,221 | | | | | |
| 12 | Amtrak | \$0 | | | | | |
| 13 | Amtrak | \$1,406,731 | | | | | |
| 14 | Amtrak | \$6,756,770 | | | | | |
| 15 | Amtrak | \$2,101,895 | | | | | |
| 16 | Amtrak | \$11,633,839 | | | | | |
| 17 | Amtrak | \$14,952,375 | | | | | |
| 18 | Amtrak | \$2,919,721 | | | | | |
| 19 | Amtrak | \$0 | | | | | |
| 20 | Amtrak | \$36,144,291 | | | | | |
| 21 | Amtrak | \$3,959,131 | | | | | |
| 22 | Amtrak | \$50,708,961 | | | | | |
| 23 | Amtrak | \$4,130,939 | | | | | |
| 24 | Amtrak | \$981,550 | | | | | |
| 25 | Amtrak | \$16,451,080 | | | | \$6,581,618 | |
| 27 | Amtrak | \$9,261,546 | | | | | |
| 28 | Amtrak | \$148,583 | | | | | |
| 29 | Amtrak | \$0 | | | | | |
| 30 | Amtrak | \$16,996,936 | | | | | |
| 31 | Amtrak | \$27,696,328 | | | | | |
| Total | | \$310,093,105 | \$19,265,726 | \$2,162,417 | \$5,611,962 | \$6,806,893 | \$49,221,409 |

| MNR | LIRR ¹ | NJT | SEPTA | DelDOT | MDOT | VRE | Other Capital | Total |
|--------------|-------------------|--------------|--------------|-------------|--------------|-----------|---------------|---------------|
| | | | | | | | | \$24,211,887 |
| | | | | | | | | \$7,140,627 |
| | | | | | | | | \$3,621,312 |
| | | | | | | | | \$8,100,455 |
| | | | | | | | | \$14,803,669 |
| | | | | | | | \$63,563,938 | \$131,200,000 |
| \$13,767,295 | | | | | | | \$2,906,690 | \$19,200,000 |
| | | | | | | | | \$5,005,377 |
| | \$0 | | | | | | | \$13,848,242 |
| | \$2,985,534 | \$0 | | | | | | \$7,445,885 |
| | \$5,398,002 | \$0 | | | | | | \$34,373,223 |
| | | \$92,251,038 | | | | | | \$92,251,038 |
| | | \$327,426 | \$0 | | | | | \$1,734,157 |
| | | | \$0 | | | | | \$6,756,770 |
| | | | \$0 | | | | | \$2,101,895 |
| | | \$0 | \$3,613,006 | | | | | \$15,246,845 |
| | | \$0 | | | | | | \$14,952,375 |
| | | | | | | | | \$2,919,721 |
| | | | \$11,386,073 | | | | | \$11,386,073 |
| | | | | \$2,748,695 | | | | \$38,892,986 |
| | | | | | | | | \$3,959,131 |
| | | | | | \$18,233,967 | | | \$68,942,928 |
| | | | | | \$0 | \$0 | | \$4,130,939 |
| | | | | | | \$637,199 | | \$1,618,749 |
| | | | | | | | | \$23,032,698 |
| | | | | | | | | \$9,261,546 |
| | | | | | | | | \$148,583 |
| | | | \$28,317,105 | | | | | \$28,317,105 |
| | | | | | | | | \$16,996,936 |
| | | | | | | | \$23,234,194 | \$50,930,522 |
| \$13,767,295 | \$8,383,536 | \$92,578,464 | \$43,316,184 | \$2,748,695 | \$18,233,967 | \$637,199 | \$89,704,822 | \$662,531,675 |

⁽¹⁾ Long Island Rail Road's obligation is subject to revision based on actual expenditures per Amtrak-LIRR agreement.

FY21 Capital Renewal Plans by BCC Segment

BCC Segment 1: Boston South Station to MA/RI State Line (MBTA-owned)

Operators: Amtrak, MBTA

| Investment Type | BCC Eligible | BCC Ineligible | Segment Total |
|-----------------|--------------|----------------|---------------|
| Programs | \$10,590,368 | \$0 | \$10,590,368 |
| Projects | \$13,621,519 | \$0 | \$13,621,519 |
| Total | \$24,211,887 | \$0 | \$24,211,887 |

Programs

| Investment Description and FY21 Scope | Units | Schedule | FY21 Budget |
|---|-------------------|--------------------------------------|-------------|
| BCC Eligible | | | |
| Battery Bank Replacement Program | | | |
| Replace Battery Banks at Interlockings between MP190.9 - MP229.0 | 1 Lump Sum | October 1, 2020 - September 30, 2021 | \$138,880 |
| CWR Replacement Program | | | |
| 4000 LF Rail - Location TBD | 4000 LF | June 1, 2021 - August 31, 2021 | \$715,000 |
| Fuse Upgrade Program | | | |
| Upgrade to slow burn fuses at interlockings between MP190.9 - MP229.0. | 1 Lump Sum | October 1, 2020 - September 30, 2021 | \$146,556 |
| Gas Hot Air Switch Blower Program | | | |
| Install Gas Hot Air Blower Switch Heaters (4 Units) - Location TBD | 4 Units | April 1, 2021 - September 30, 2021 | \$450,000 |
| Insulated Joint Program | | | |
| 20 Insulated Joints - MP190.9 - MP229.0 | 20 Units | October 1, 2020 - September 30, 2021 | \$194,195 |
| Interlocking Crossover Replacement Program | | | |
| Transfer 13 Turnout Replacement | 1 Turnout | July 1, 2021 - August 31, 2021 | \$750,000 |
| Interlocking Steel Replacement Program | | | |
| Replace 5 Units Interlocking Steel - MP190.9 - MP229.0 | 5 Units | October 1, 2020 - September 30, 2021 | \$276,067 |
| Joint Elimination Program | | | |
| 50 Thermite Welds - MP190.9 - MP229.0 | 50 Units | October 1, 2020 - September 30, 2021 | \$269,250 |
| M3 Switch Machine Program | | | |
| Upgrade to M3 Switch Machines at 8 locations between MP190.9 and MP229.0. | 8 Units | October 1, 2020 - September 30, 2021 | \$375,995 |
| Out Of Face Surfacing Program | | | |
| 100,000 Pass-Feet of Out-of-Face High Speed Surfacing - MP190.9 - MP229.0 | 100,000 Pass-Feet | October 1, 2020 - September 30, 2021 | \$1,076,891 |
| RoW Fence Upgrades Program | | | |
| Install impasse fence in Hyde Park, MA along Track 3. | 2,800 Linear Feet | October 1, 2020 - December 31, 2020 | \$1,250,000 |
| Spot Surfacing Program | | | |
| 60,000 Feet of Spot Surfacing - MP190.9 - MP229.0 | 60,000 Feet | October 1, 2020 - September 30, 2021 | \$1,725,895 |
| Spot Undercutting Program | | | |
| 150 Feet of Spot Undercutting - MP190.9 - MP229.0 | 150 Feet | October 1, 2020 - September 30, 2021 | \$303,469 |
| Switch Heater Cabinet / Control Program | | | |
| Replace Switch Hear Cabinet / Controls - Plains I/L | 1 Units | June 1, 2021 - August 31, 2021 | \$350,000 |
| Tie/Timber Program | | | |
| Replace 800 ties/timbers - MP190.9 - MP229.0 | 800 Units | October 1, 2020 - September 30, 2021 | \$686,687 |
| Track Circuit Protection Program | | | |
| Surge Protector replacements between MP190.9 and MP229.0. | 1 Lump Sum | October 1, 2020 - September 30, 2021 | \$100,000 |

Tables include a subset of submitted capital renewal data. For complete details including BCC segment breakdown, go to nec-commission.com.

| Investment Description and FY21 Scope | Units | Schedule | FY21 Budget |
|---|------------|--------------------------------------|--------------|
| Track Lead Replacement Program | | | |
| Replace Track Leads between MP190.9 and MP229.0 | 1 Lump Sum | October 1, 2020 - September 30, 2021 | \$370,000 |
| Tree Cutting Program | | | |
| 50 weeks tree cutting program - MP190.9 - MP229.0 | 50 Weeks | October 1, 2020 - September 30, 2021 | \$1,050,625 |
| Undergrade Bridge Upgrades Program | | | |
| Complete upgrades and retirements of undergrade bridges at locations TBD. | 1 Lump Sum | October 1, 2020 - September 30, 2021 | \$360,858 |
| | | BCC Segment 1 Programs Total | \$10,590,368 |

Projects

| Investment Description and FY21 Scope | Schedule | FY21 Budget |
|---|--------------------------------------|--------------|
| BCC Eligible | | |
| Emergency Egress Upgrades Project | | |
| Complete the installation of new enclosures with vertical doors at six emergency egress locations. | October 1, 2020 - September 30, 2021 | \$1,000,000 |
| Hawk Hot Box / Dragging Equipment Detector Upgrade Project | | |
| Procure the equipment and install the replacement hot box / dragging equipment detector at MP208.7. | April 1, 2021 - September 30, 2021 | \$300,000 |
| Interlocking RTU Upgrades Project | | |
| Complete the upgrades of remote terminal units at Hebronville I/L, Holden I/L, Junction I/L, and Mansfield I/L. | October 1, 2020 - September 30, 2021 | \$481,087 |
| Power and Express Cable Upgrade Project | | |
| Complete the installation of 21,000 feet of power, express, and communication cable between Read I/L and Forest I/L. | October 1, 2020 - December 31, 2020 | \$1,000,000 |
| Readville Material Control Warehouse Project | | |
| Complete the design and construction of a material control warehouse at Yard 5, Readville, MA. | October 1, 2020 - September 30, 2021 | \$1,545,697 |
| South Station Tie and Rail Replacement Project | | |
| Complete the upgrade to concrete guardrail ties and replace the rail, clip, pads, insulators, and ballast to Tracks 1-2 at South Station. | August 1, 2021 - September 30, 2021 | \$2,726,887 |
| Southampton Street and South Bay I/L Upgrades Project | | |
| Begin the design phase for the South Bay I/L upgrades and backup generators. Procure and install DTMF switches at Southampton Street Yard. Procure and install transformer at South Bay I/L. | October 1, 2020 - September 30, 2021 | \$2,885,148 |
| TAMS Upgrades Project | | |
| Upgrade TAMS system at Canton Junction Station (Canton, MA), MP 213.7, Ruggles Street Station (MP226.4), Forest Hills Station (MP223.8), Mansfield Station (MP204.0), and Sharon Station (MP210.6). | October 1, 2020 - September 30, 2021 | \$3,228,565 |
| Undgergrade Bridge Upgrades Program | | |
| Install anti-graffiti coating installed at four undergrade bridges (MP203.85, MP204.44, 206.42, and MP212.02). | April 1, 2021 - September 30, 2021 | \$454,135 |
| | BCC Segment 1 Projects Total | \$13,621,519 |

BCC Segment 2: MA/RI State Line to Providence (Amtrak-owned)

Operators: Amtrak, MBTA

| Investment Type | BCC Eligible | BCC Ineligible | Segment Total |
|-----------------|--------------|----------------|---------------|
| Programs | \$7,140,627 | \$0 | \$7,140,627 |
| Projects | \$0 | \$0 | \$0 |
| Total | \$7,140,627 | \$0 | \$7,140,627 |

Programs

| Investment Description and FY21 Scope | Units | Start Date | End Date | FY21 Budget |
|---|---|-------------------------|-----------------------|---------------------------------------|
| BCC Eligible | | | | |
| PG00029 - New England Catenary - C.EN.101836 | | | | |
| Projects include catenary hardware renewal between New Haven, CT, and Boston, OCS in service on Track 4 between Hebronville I/L and Holden I/L in Attleboro, MA | | e MOD Units at Southa | mpton Street Yard, a | nd placing the |
| Constant Tension Hardware Renewal MP 185.1 - 190.9 AB Line | | | | |
| C.EN.101836.0006 CATC NED AB LN MP185.1-190.9-HRDWRE RNEW | 1 EA Install/Renew Registration Arms/1 EA Install/Renew Catenary Insulators/ Hardware | 10/1/2020 | 9/30/2021 | \$68,882 |
| PG00033 - New England Signals - C.EN.101839 | | | | |
| Projects include switch machine replacements in Rhode Island, cable replacements and Rhode Island, upgrade the RTUs at Palmers Cove, Shaws, Mystic, and Conn by line. Install grade crossing recorders at 10 locations. | | | | |
| Track Circuit ABS Upgrades MP 185.1 - 190.9 AB Line | | | | |
| C.EN.101839.0036 ABS NED AB LN MP185.1/190.9-TRK CIRCUIT | Units not applicable | 11/12/2020 | 11/25/2020 | \$54,698 |
| PG00036 - New England Track - C.EN.101842 | | | | |
| Replace wood ties, concrete ties, interlocking steel, and insulated joints as well as in Connecticut and Rhode Island. Perform ride quality, drainage, and road bed imp Connecticut and Massachusetts and the AB Line in Connecticut and Rhode Island. | provements through spot surfacing, | spot undercutting, dita | ching and grading acr | and the AB Line oss the AS Line in |
| Concrete Tie Replacement MP 185.1 - 190.9 AB Line | | | | |
| C.EN.101842.0026 TIES NED CONCRETE AB LN MP185.1-190.9 | 75 EA | 10/1/2020 | 9/30/2021 | \$162,102 |
| Insulated Joint Removal MP 185.1 - 190.9 AB Line | | | | |
| C.EN.101842.0006 RAIL NED INSULATE JT AB LN MP185.1-190.9 | 12 EA Install Insulated Joint (Incl OTM) | 10/1/2020 | 9/30/2021 | \$128,539 |
| Interlocking Steel MP 185.1 - 190.9 AB Line | | | | |
| C.EN.101842.0046 TURN NED I/L STEEL AB LN MP185.1-190.9 | 1 EA Renew Frog / 1 EA Renew Swtich Point Stock | 10/1/2020 | 10/1/2021 | \$86,991 |
| Joint Elimination MP 185.1 - 190.9 AB Line | | | | |
| C.EN.101842.0016 RAIL NED JOINT ELIM AB LN MP185.1-190.9 | 40 EA Field Weld and Grind Rail (Joint Elimination) | 10/1/2020 | 9/30/2021 | \$298,817 |
| Spot Surfacing MP 185.1 - 190.9 AB Line | | | | |
| C.EN.101842.0066 GEOM NED SPOT SURFAC AB LN MP185.1-190.9 | 22000 PF | 10/1/2020 | 9/30/2021 | \$365,582 |
| Spot Undercutting MP 185.1 - 190.9 AB Line | | | | |
| C.EN.101842.0076 BLST NED SPOT UNDRCUT AB-MP185.1-190.9 | 1000 FT Vacuum Train, Spot Under | 10/1/2020 | 10/1/2021 | \$404,545 |
| Wood Tie/Timber Replacement MP 185.1 - 190.9 AB Line | | | | |
| C.EN.101842.0036 TIES NED TIE/TIMB AB LN MP185.1-190.9 | 800 EA | 10/1/2020 | 9/30/2021 | \$781,820 |
| PG00060 - Production High Speed Surfacing - C.EN.101855 | | | | |
| 300 Miles Surfaced by PROD HSS | | | | |
| High Speed Surfacing Production MP 185.1 - 165.9 AB Line | | | | |

 $Tables\ include\ a\ subset\ of\ submitted\ capital\ renewal\ data.\ For\ complete\ details\ including\ BCC\ segment\ breakdown,\ go\ to\ nec-commission.com.$

| Investment Description and FY21 Scope | Units | Start Date | End Date | FY21 Budget |
|---|--|---------------|----------------|-------------|
| C.EN.101855.0005 GEOM AB LN MP185.1- 165.9 HSS PRODUCTION - 3 | Units not applicable | 10/1/2020 | 9/30/2021 | \$712,385 |
| High Speed Surfacing Production MP 190.9 - 185.1 AB Line | | | | |
| C.EN.101855.0003 GEOM AB LN MP 190.9-185.1 HSS PRDUCTION - 2 | Units not applicable | 10/1/2020 | 9/30/2021 | \$89,493 |
| PG00065 - Turnout Renewal - C.EN.101860 | | | | |
| See below for further detail on planned FY21 work. | | | | |
| Lawn Interlocking #21 Crossover | | | | |
| C.EN.101860.0091 TURN LAWN I/L #21 X/O - INSTALL | Units not applicable | 11/4/2020 | 11/18/2020 | \$1,089,969 |
| C.EN.101860.0092 TURN LAWN I/L #21 X/O - T&E SUPPORT | Units not applicable | 11/4/2020 | 12/2/2020 | \$33,662 |
| C.EN.101860.0093 TURN LAWN I/L #21 X/O - B&B SUPPORT | Units not applicable | 11/4/2020 | 12/2/2020 | \$17,013 |
| C.EN.101860.0094 TURN LAWN I/L #21 X/O - C&S SUPPORT | Units not applicable | 11/4/2020 | 12/2/2020 | \$25,909 |
| Orms Interlocking #21 Crossover | | | | |
| C.EN.101860.0001 TURN - ORMS #21 X/O - INSTALL | 2 EA Install Wood Turnout | 8/20/2021 | 9/2/2021 | \$1,327,852 |
| C.EN.101860.0002 TURN - ORMS #21 X/O - ET SUPPORT | Units not applicable | 8/20/2021 | 9/2/2021 | \$20,985 |
| C.EN.101860.0003 TURN - ORMS #21 X/O - T&E SUPPORT | Units not applicable | 8/20/2021 | 9/2/2021 | \$47,721 |
| C.EN.101860.0004 TURN - ORMS #21 X/O - B&B SUPPORT | Units not applicable | 8/20/2021 | 9/2/2021 | \$9,951 |
| C.EN.101860.0005 TURN - ORMS #21 X/O - C&S SUPPORT | 4 EA Install Switch Machine | 8/20/2021 | 9/2/2021 | \$155,851 |
| PG00069 - Fence Upgrades - C.EN.101854 | | | | |
| See below for further detail on planned FY21 work. | | | | |
| Royal Little Rd, RI Security Fence | | | | |
| C.EN.101854.0010 FEN ROYAL LITTLE ROAD RI-SECURITY FENCE | 5100 FT Install/ Repair Right of Way Fencing | 10/5/2020 | 2/18/2021 | \$1,257,862 |
| | | BCC Segment 2 | Programs Total | \$7,140,627 |

BCC Segment 3: Providence to Wickford Junction (Amtrak-owned)

Operators: Amtrak, MBTA (on behalf of RIDOT)

| Investment Type | BCC Eligible | BCC Ineligible | Segment Total |
|-----------------|--------------|----------------|---------------|
| Programs | \$3,536,540 | \$0 | \$3,536,540 |
| Projects | \$84,772 | \$0 | \$84,772 |
| Total | \$3,621,312 | \$0 | \$3,621,312 |

Programs

| Investment Description and FY21 Scope | Units | Start Date | End Date | FY21 Budget |
|---|---|-------------------------|-------------------------|----------------|
| BCC Eligible | | | | |
| PG00029 - New England Catenary - C.EN.101836 | | | | |
| Projects include catenary hardware renewal between New Haven, CT, and OCS in service on Track 4 between Hebronville I/L and Holden I/L in Attle | | the MOD Units at South | hampton Street Yard, ai | nd placing the |
| Constant Tension Hardware Renewal MP 165.9 - 185.1 AB Line | | | | |
| C.EN.101836.0005 CATC NED AB LN MP165.9-185.1-HRDWRE RNEW | 1 EA Install/Renew Registration Arms/1 EA Install/Renew Catenary Insulators/ Hardware | 10/1/2020 | 9/30/2021 | \$68,882 |
| PG00030 - New England Communications - C.EN.101837 | | | | |
| FY21 Scope not available. | | | | |
| Warwick Sub 84 SCADA RTU Replacement | | | | |
| C.EN.101837.xxxx SUB NED-SUB STA SCADA/RTU - SUB 84 WARWICI | 1 EA Install / Renew RTU | 12/1/2020 | 12/15/2020 | \$139,639 |
| PG00033 - New England Signals - C.EN.101839 | | | | |
| Projects include switch machine replacements in Rhode Island, cable replacement Rhode Island, upgrade the RTUs at Palmers Cove, Shaws, Mystic, and line. Install grade crossing recorders at 10 locations. | | | | |
| ABS Track Circuit Upgrades MP 165.9 - 185.1 AB Line | | | | |
| C.EN.101839.0035 ABS NED AB LN MP165.9/185.1-TRK CIRCUIT | 20 EA Track Circuits, Relays, and ACSES | 3/19/2021 | 4/30/2021 | \$96,491 |
| Interlocking Switch Machine Upgrades MP 165.9 - 185.1 AB Line | | | | |
| C.EN.101839.0045 INT NED M3 SW MACH AB LN MP165.9-185.1 | 8 EA Install Switch Machine | 2/8/2021 | 3/8/2021 | \$121,588 |
| PG00036 - New England Track - C.EN.101842 | | | | |
| Replace wood ties, concrete ties, interlocking steel, and insulated joints as in Connecticut and Rhode Island. Perform ride quality, drainage, and road Connecticut and Massachusetts and the AB Line in Connecticut and Rhod | bed improvements through spot surfacin | g, spot undercutting, d | itching and grading acr | |
| Concrete Tie Replacement MP 165.9 - 185.1 AB Line | | | | |
| C.EN.101842.0025 TIES NED CONCRETE AB LN MP165.9-185.1 | 75 EA Install Ties, Concrete | 10/1/2020 | 9/30/2021 | \$243,151 |
| Drainage Improvements MP 165.9 - 185.1 AB Line | | | | |
| C.EN.101842.0085 DRAN NED AB LN-DRAIN IMPRV-MP165.9-185.1 | 3000 FT Ditching and Grading | 10/1/2020 | 3/15/2021 | \$168,147 |
| Insulated Joint Removal MP 165.9 - 185.1 AB Line | | | | |
| C.EN.101842.0005 RAIL NED INSULATE JT AB LN MP165.9-185.1 | 12 EA Install Insulated Joint (Includes OTM) | 10/1/2020 | 9/30/2021 | \$128,539 |
| Interlocking Steel MP 165.9 - 185.1 AB Line | | | | |
| C.EN.101842.0045 TURN NED I/L STEEL AB LN MP165.9-185.1 | 2 EA Renew Frog / 2 EA Renew Switch Point Stock Rail | 10/1/2020 | 10/1/2021 | \$173,925 |
| Joint Elimination MP 165.9 - 185.1 AB Line | | | | |

 $Tables\ include\ a\ subset\ of\ submitted\ capital\ renewal\ data.\ For\ complete\ details\ including\ BCC\ segment\ breakdown,\ go\ to\ nec-commission.com.$

| Investment Description and FY21 Scope | Units | Start Date | End Date | FY21 Budget |
|---|---|---------------|----------------|-------------|
| C.EN.101842.0015 RAIL NED JOINT ELIM AB LN MP165.9-185.1 | 40 EA Field Weld and Grind Rail (Joint Elimination) | 10/1/2020 | 9/30/2021 | \$211,700 |
| Spot Surfacing MP 165.9 - 185.1 AB Line | | | | |
| C.EN.101842.0065 GEOM NED SPOT SURFAC AB LN MP165.9-185.1 | 25000 PF Surface Track, Spot | 10/1/2020 | 9/30/2021 | \$443,614 |
| Spot Undercutting MP 165.9 - 185.1 AB Line | | | | |
| C.EN.101842.0075 BLST NED SPOT UNDRCUT AB-MP165.9-185.1 | 1000 FT Vacuum Train, Spot Undercut | 10/1/2020 | 10/1/2021 | \$404,545 |
| Wood Tie/Timber Replacement MP 165.9 - 185.1 AB Line | | | | |
| C.EN.101842.0035 TIES NED TIE/TIMB AB LN MP165.9-185.1 | Units not applicable | 10/1/2020 | 9/30/2021 | \$195,479 |
| PG00065 - Turnout Renewal - C.EN.101860 | | | | |
| See below for further detail on planned FY21 work. | | | | |
| Cranston Interlocking #42 Turnout | | | | |
| C.EN.101860.0036TURN - CRANSTON #42 T/O - INSTALL | 2 EA Install Concrete Turnout | 5/21/2021 | 5/27/2021 | \$914,941 |
| C.EN.101860.0037TURN - CRANSTON #42 T/O - ET SUPPORT | Units not applicable | 5/21/2021 | 5/27/2021 | \$7,410 |
| C.EN.101860.0038TURN - CRANSTON #42 T/O - T&E SUPPORT | Units not applicable | 5/21/2021 | 5/27/2021 | \$17,895 |
| C.EN.101860.0039TURN - CRANSTON #42 T/O - B&B SUPPORT | Units not applicable | 5/21/2021 | 5/27/2021 | \$14,925 |
| C.EN.101860.0040TURN - CRANSTON #42 T/O - C&S SUPPORT | 4 EA Install Switch Machine | 5/21/2021 | 5/27/2021 | \$185,669 |
| | | BCC Segment 3 | Programs Total | \$3,536,540 |

| Investment Description and FY21 Scope | Start Date | End Date | FY21 Budget |
|---|------------|---------------------|-------------|
| BCC Eligible | | | |
| P000160 - Movable Point Frog Switch Machine Rod Replacement - C.EN.101894 | | | |
| The FY 21 scope is to complete the remaining 54 turnouts. | | | |
| C.EN.101894.0002 INT STONY I/L MP166.5-MPF HST ROD RPL | 6/5/2021 | \$18,196 | \$68,882 |
| C.EN.101894.0003 INT POST I/L MP178.5-MPF HST ROD RPL | 6/19/2021 | \$66,576 | \$68,882 |
| | BCC Segme | nt 3 Projects Total | \$84,772 |

BCC Segment 4: Wickford Junction to New London (Amtrak-owned)

Operators: Amtrak

| Investment Type | BCC Eligible | BCC Ineligible | Segment Total |
|-----------------|--------------|----------------|---------------|
| Programs | \$8,027,670 | \$0 | \$8,027,670 |
| Projects | \$72,785 | \$0 | \$72,785 |
| Total | \$8,100,455 | \$0 | \$8,100,455 |

Programs

| Investment Description and FY21 Scope | Units | Start Date | End Date | FY21 Budge |
|--|--|-------------------------|-----------------------|----------------|
| BCC Eligible | | | | |
| PG00029 - New England Catenary - C.EN.101836 | | | | |
| Projects include catenary hardware renewal between New Haven, CT, and Boston, MA on the OCS in service on Track 4 between Hebronville I/L and Holden I/L in Attleboro, MA. | ne AB Line, replacing of the | MOD Units at Southa | mpton Street Yard, ar | nd placing the |
| Constant Tension Hardware Renewal MP 158.0 - 165.9 AB Line | | | | |
| C.EN.101836.0004 CATC NED AB LN MP158.0-165.9-HRDWRE RNEW | 1 EA Install / Renew Registration Arms / 1 EA Install / Renew Catenary Insulators / Hardware | 10/1/2020 | 9/30/2021 | \$68,882 |
| PG00030 - New England Communications - C.EN.101837 | | | | |
| FY21 Scope not available. | | | | |
| Groton SCADA RTU Replacement | | | | |
| C.EN.101837.xxxx SUB NED-SUB STA SCADA/RTU - GROTON | 1 EA Install / Renew RTU | 6/1/2021 | 6/15/2021 | \$103,998 |
| PG00033 - New England Signals - C.EN.101839 | | | | |
| Projects include switch machine replacements in Rhode Island, cable replacements at multip and Rhode Island, upgrade the RTUs at Palmers Cove, Shaws, Mystic, and Conn by Amtrak line. Install grade crossing recorders at 10 locations. | | | | |
| ABS Track Circuit Upgrades MP 122.9 - 141.35 AB Line | | | | |
| C.EN.101839.0033 ABS NED AB LN MP122.9/141.35-TRK CIRCUIT | 12 EA Track Circuits, Relays, and ACSES | 1/29/2021 | 2/12/2021 | \$54,720 |
| Interlocking Switch Machine Upgrades MP 141.35 - 165.9 AB Line | | | | |
| C.EN.101839.0044 INT NED M3 SW MACH AB LN MP141.35-165.9 | 4 EA Install Switch Machine | 10/5/2020 | 5/3/2021 | \$352,56 |
| Mystic River Interlocking RTU Upgrades | | | | |
| C.EN.101839.0109 INT MYSTIC RIVER I/L-RTU UPGRADES | 1 EA Install / Replace RTU | 9/18/2020 | 11/12/2020 | \$65,55 |
| Palmers Cove Interlocking RTU Upgrades | | | | |
| C.EN.101839.0106 INT PALMER COVE I/L-RTU UPGRADES | 1 EA Install / Replace RTU | 9/18/2020 | 11/12/2020 | \$65,553 |
| PG00034 - New England Structures - C.EN.101840 | | | | |
| Complete the steel upgrades and bridge timber replacement at the Conn. River Bridge (CT (CT106.89) on the AB Line. Complete the installation of the Hull Street Strike Beam and stee several SOGR projects at the five movable bridges on the AB Line. Design projects include and culvert upgrades on both the AB and AB lines. | el and abutment upgrades | to State Pier (CT123.59 | 9) undergrade bridge | . Complete |
| Bridge Strike Mitigation MP 122.9 & MP 158.0 AB Line | | | | |
| C.EN.101840.0005 BGUG NED MP122.9/158.0-STRIKE MITIGATION | 5 EA Install and Maintain Signage | 5/3/2021 | 9/30/2021 | \$59,16 |
| Mystic Bridge Mobile Catenary Construction | | | | |
| C.EN.101840.0036 BGMS CT132.16 MOBILE CAT CONSTRUCT MYSTIC - B&B | Units not applicable | 3/1/2021 | 1/5/2022 | \$8,818 |
| Mystic River Bridge Gearbox Replacement MP 132.16 AB Line | | | | |
| C.EN.101840.0020 BGMS CT132.16 MYSTIC RIVER GEARBOX REPLACEMENT SOUTH - B&B | Units not applicable | 8/2/2021 | 9/7/2021 | \$174,486 |

| nvestment Description and FY21 Scope | Units | Start Date | End Date | FY21 Budget |
|--|--|-------------------------|------------------------|---------------|
| State Pier Steel Upgrades MP 123.59 AB Line | | | | |
| C.EN.101840.0038 BGUG CT123.59 STATE PIER STEEL UPGRADES - B&B | Units not applicable | 5/3/2021 | 7/30/2021 | \$320,669 |
| G00035 - New England Substations - C.EN.101841 | | | | |
| Projects include replacing the transformer at the Norton Substation (MP198.9), installing London, Millstone, Leetes Island, and Madison. Replace the batteries at the Stonington relays and breaker vacuum bottle replacement at two substations and complete a substations. | Paralling Station and ground | oower at Whitfield Sidi | ng in Guilford, CT. Re | place breaker |
| New London Sub 82 Breaker Relay Replacement AB Line | | | | |
| C.EN.101841.0021 Breaker Relay Replacement -New London | 1 EA Install / Renew Breaker | 2/1/2021 | 5/28/2021 | \$96,724 |
| New London Sub 82 Breaker Relay Replacement AB Line | | | | |
| C.EN.101841.0022 Breaker Vacuum Bottle Replacement - New London | 2 EA Install / Renew Breaker | 2/1/2021 | 5/28/2021 | \$380,378 |
| G00036 - New England Track - C.EN.101842 | | | | |
| Replace wood ties, concrete ties, interlocking steel, and insulated joints as well as contin Connecticut and Rhode Island. Perform ride quality, drainage, and road bed improve Connecticut and Massachusetts and the AB Line in Connecticut and Rhode Island. Wor | ements through spot surfacing, | spot undercutting, dita | ching and grading aci | |
| Concrete Tie Replacement MP 122.9 - 158.0 AB Line | | | | |
| C.EN.101842.0023 TIES NED CONCRETE AB LN MP122.9-158.0 | 75 EA Install Ties, Concrete | 10/1/2020 | 9/30/2021 | \$173,91 |
| Concrete Tie Replacement MP 158.0 - 165.9 AB Line | | | | |
| C.EN.101842.0024 TIES NED CONCRETE AB LN MP158.0-165.9 | 75 EA Install Ties, Concrete | 10/1/2020 | 9/30/2021 | \$243,15 |
| Drainage Improvements MP 122.9 - 158.0 AB Line | | | | |
| C.EN.101842.0083 DRAN NED AB LN-DRAIN IMPRV-MP122.9-158.0 | 2000 FT Ditching and Grading | 3/1/2021 | 3/12/2021 | \$39,979 |
| Groton Interlocking Drainage Improvement MP 123.5 AB Line | | | | |
| C.EN.101842.0215 DRAN GROTON INT DRAN IMPROV DSGN | Units not applicable | 4/1/2021 | 8/31/2021 | \$277,833 |
| Insulated Joint Removal MP 122.9 - 158.0 AB Line | | | | |
| C.EN.101842.0003 RAIL NED INSULATE JT AB LN MP122.9-158.0 | 8 EA Install Insulated Joint (Includes OTM) | 10/1/2020 | 9/30/2021 | \$92,152 |
| Insulated Joint Removal MP 158.0 - 165.9 AB Line | | | | |
| C.EN.101842.0004 RAIL NED INSULATE JT AB LN MP158.0-165.9 | 12 EA Install Insulated Joint (Includes OTM) | 10/1/2020 | 9/30/2021 | \$128,53 |
| Interlocking Steel MP 122.9 - 158.0 AB Line | | | | |
| C.EN.101842.0043 TURN NED I/L STEEL AB LN MP122.9-158.0 | 2 EA Renew Frog / 2 EA Renew Switch Point Stock Rail | 10/1/2020 | 9/30/2021 | \$160,696 |
| | | | | |
| Interlocking Steel MP 158.0 - 165.9 AB Line | | | | |

35 EA Field Weld

and Grind Rail (Joint Elimination)

Joint Elimination MP 122.9 - 158.0 AB Line

Joint Elimination MP 158.0 - 165.9 AB Line

C.EN.101842.0013 RAIL NED JOINT ELIM AB LN MP122.9-158.0

9/30/2021

10/1/2020

\$183,151

| Investment Description and FY21 Scope | Units | Start Date | End Date | FY21 Budget |
|--|---|------------|------------|-------------|
| C.EN.101842.0014 RAIL NED JOINT ELIM AB LN MP158.0-165.9 | 40 EA Weld and Grind Rail (Joint Elimination) | 10/1/2020 | 9/30/2021 | \$211,700 |
| Spot Rock Scaling Drainage Improvements MP 122.9 - 158.0 AB Line | | | | |
| C.EN.101842.0213 DRAN SPOT ROCK SCALING AB LN MP122.9-158.0 | Units not applicable | 5/3/2021 | 5/28/2021 | \$99,164 |
| Spot Surfacing MP 122.9 - 158.0 AB Line | | | | |
| C.EN.101842.0063 GEOM NED SPOT SURFAC AB LN MP122.9-158.0 | 25000 PF Surface Track, Spot | 10/1/2020 | 9/30/2021 | \$428,466 |
| Spot Surfacing MP 158.0 - 165.9 AB Line | | | | |
| C.EN.101842.0064 GEOM NED SPOT SURFAC AB LN MP158.0-165.9 | 25000 PF Surface Track, Spot | 10/1/2020 | 9/30/2021 | \$443,614 |
| Spot Undercutting MP 122.9 - 158.0 AB Line | | | | |
| C.EN.101842.0073 BLST NED SPOT UNDRCUT AB-MP122.9-158.0 | 200 FT Vacuum Train, Spot Undercut | 10/1/2020 | 10/1/2021 | \$67,787 |
| Spot Undercutting MP 158.0 - 165.9 AB Line | | | | |
| C.EN.101842.0074 BLST NED SPOT UNDRCUT AB-MP158.0-165.9 | 1000 FT Vacuum Train, Spot Undercut | 10/1/2020 | 10/1/2021 | \$404,545 |
| Wood Tie/Timber Replacement MP 122.9 - 158.0 AB Line | | | | |
| C.EN.101842.0033 TIES NED TIE/TIMB AB LN MP122.9-158.0 | 400 EA Install Ties and Timbers | 10/1/2020 | 9/30/2021 | \$314,980 |
| PG00060 - Production High Speed Surfacing - C.EN.101855 | | | | |
| 300 Miles Surfaced by PROD HSS | | | | |
| High Speed Surfacing Production MP 143.1 - 122.9 AB Line | | | | |
| C.EN.101855.0009 GEOM AB LN MP 143.1-122.9 HSS PRDUCTION - 4 | Units not applicable | 10/1/2020 | 9/30/2021 | \$1,056,643 |
| PG00063 - Track Rehabilitation - C.EN.101859 | | | | |
| See below for further detail on planned FY21 work. | | | | |
| Groton Interlocking House Track | | | | |
| Amtrak FA - Labor | Units not applicable | 10/5/2020 | 12/18/2020 | \$121,544 |
| C.EN.101859.2021.38 TKRH GROTON INRL - HOUSE TRACK | Units not applicable | 10/5/2020 | 12/18/2020 | \$33,680 |
| Surfacing | Units not applicable | 10/5/2020 | 12/18/2020 | \$46,751 |
| Groton Yard Track Improvements | | | | |
| C.EN.101859.2021.37 TKRH GROTON CT YD-TRACK IMPROVEMENT | Units not applicable | 4/1/2021 | 5/30/2021 | \$84,582 |
| Westerly Yard Track Rehabilitation | | | | |
| Amtrak FA - Labor | Units not applicable | 1/4/2021 | 4/16/2021 | \$209,133 |
| C.EN.101859.2021.39 TKRH WESTERLY YARD - TRACK IMPROVEMENT | 2000 EA Install Ties, Concrete | 1/4/2021 | 4/16/2021 | \$33,680 |

| Investment Description and FY21 Scope | Units | Start Date | End Date | FY21 Budget |
|---|---|---------------|----------------|-------------|
| Fit Concrete Ties and Joint fit rail panels | Units not applicable | 1/4/2021 | 4/16/2021 | \$442,913 |
| Surfacing | Units not applicable | 1/4/2021 | 4/16/2021 | \$46,751 |
| PG00069 - Fence Upgrades - C.EN.101854 | | | | |
| See below for further detail on planned FY21 work. | | | | |
| Charleston, RI Impasse Fence Installation - MP 152.3, AB Line | | | | |
| C.EN.101854.2021.11 FEN NED MP 152.3 AB LN CHARLESTON, RI- IMPASSE FENCE INSTALL | 2000 FT Install / Repair Right of Way Fencing | 11/2/2020 | 7/12/2021 | \$473,948 |
| Stonington, CT Impasse Fence Installation - MP 134.54, AB Line | | | | |
| C.EN.101854.2021.15 FEN NED MP 134.54 AB LN STONINGTON, CT- IMPASSE FENCE INSTALL | 1300 FT Install / Repair Right of Way Fencing | 11/2/2020 | 6/24/2021 | \$304,730 |
| | | BCC Segment 4 | Programs Total | \$8,027,670 |

| Investment Description and FY21 Scope | Start Date | End Date | FY21 Budget |
|---|-------------|------------------|-------------|
| BCC Eligible | | | |
| P000160 - Movable Point Frog Switch Machine Rod Replacement - C.EN.101894 | | | |
| The FY 21 scope is to complete the remaining 54 turnouts. | | | |
| C.EN.101894.0004 INT KINGSTON I/L MP158.8-MPF HST ROD RPL | 6/25/2021 | 6/26/2021 | \$18,196 |
| C.EN.101894.0005 INT LIBERTY I/L MP157-MPF HST ROD REPLAC | 7/2/2021 | 7/17/2021 | \$54,588 |
| | BCC Segment | 4 Projects Total | \$72,785 |

BCC Segment 5: New London to New Haven (Amtrak-owned)

Operators: Amtrak, CTrail Shore Line East

| Investment Type | BCC Eligible | BCC Ineligible | Segment Total |
|-----------------|--------------|----------------|---------------|
| Programs | \$9,909,442 | \$0 | \$9,909,442 |
| Projects | \$4,894,227 | \$0 | \$4,894,227 |
| Total | \$14,803,669 | \$0 | \$14,803,669 |

Programs

| evestment Description and FY21 Scope | Units | Start Date | End Date | FY21 Budge |
|---|--|------------------------|-----------------------|----------------|
| CC Eligible | | | | |
| G00029 - New England Catenary - C.EN.101836 | | | | |
| Projects include catenary hardware renewal between New Haven, CT, and Boston, M. OCS in service on Track 4 between Hebronville I/L and Holden I/L in Attleboro, MA. | A on the AB Line, replacing of the | MOD Units at Southa | mpton Street Yard, ar | nd placing the |
| View Interlocking Lighting Upgrades MP 105.7 AB Line | | | | |
| C.EN.101836.0106 INT LIGHTING UPGRADES VIEW I/L | Units not applicable | 7/1/2021 | 8/13/2021 | \$103,3 |
| G00030 - New England Communications - C.EN.101837 | | | | |
| FY21 Scope not available. | | | | |
| Grove Beach Sub 80C SCADA RTU Replacement | | | | |
| C.EN.101837.xxxx SUB NED-SUB STA SCADA/RTU - 80C GROVE BEACH | 1 EA Install / Renew RTU | 2/1/2021 | 2/16/2021 | \$103,9 |
| Madison Sub 80B SCADA RTU Replacement | | | | |
| C.EN.101837.xxxx SUB NED-SUB STA SCADA/RTU - 80B MADISON | 1 EA Install / Renew RTU | 12/1/2020 | 12/15/2020 | \$103,9 |
| View SCADA RTU Replacement | | | | |
| C.EN.101837.xxxx SUB NED-SUB STA SCADA/RTU - VIEW | 1 EA Install / Renew RTU | 4/1/2021 | 4/15/2021 | \$103,9 |
| Westbrook Sub W81 SCADA RTU Replacement | | | | |
| C.EN.101837.xxxx SUB NED-SUB STA SCADA/RTU - W81 WESTBROOK | 1 EA Install / Renew RTU | 10/1/2020 | 10/16/2020 | \$139, |
| G00033 - New England Signals - C.EN.101839 | | | | |
| Projects include switch machine replacements in Rhode Island, cable replacements at and Rhode Island, upgrade the RTUs at Palmers Cove, Shaws, Mystic, and Conn by A line. Install grade crossing recorders at 10 locations. | | | | |
| ABS Track Circuit Upgrades MP 72.9 - 73.5 AB Line | | | | |
| C.EN.101839.0031 ABS NED AB LN MP72.9/73.5-TRK CIRCUIT | 5 EA Track Circuits, Relays, and ACSES | 10/2/2020 | 10/2/2020 | \$28,8 |
| ABS Track Circuit Upgrades MP 73.5 - 122.9 AB Line | | | | |
| C.EN.101839.0032 ABS NED AB LN MP73.5/122.9-TRK CIRCUIT | 35 EA Track Circuits, Relays, and ACSES | 10/9/2020 | 1/22/2021 | \$169,6 |
| Conn Interlocking RTU Upgrades | | | | |
| C.EN.101839.0108 INT CONN I/L-RTU UPGRADES | 1 EA Install / Replace RTU | 9/18/2020 | 11/12/2020 | \$65,5 |
| Shaws Cove Interlocking RTU Upgrades | | | | |
| C.EN.101839.0107 INT SHAWS COVE I/L-RTU UPGRADES | 1 EA Install / Replace RTU | 9/18/2020 | 11/12/2020 | \$65, |
| G00034 - New England Structures - C.EN.101840 | | | | |
| Complete the steel upgrades and bridge timber replacement at the Conn. River Brid (CT106.89) on the AB Line. Complete the installation of the Hull Street Strike Beam a several SOGR projects at the five movable bridges on the AB Line. Design projects ir and culvert upgrades on both the AB and AB lines. | nd steel and abutment upgrades t | to State Pier (CT123.5 | 9) undergrade bridge | . Complete |
| | | | | |
| Conn River Bridge Segmental Girder Upgrades | | | | |

| nvestment Description and FY21 Scope | Units | Start Date | End Date | FY21 Budget |
|---|----------------------|------------|------------|-------------|
| Connecticut River Bridge Timber Replacement MP 106.89 AB Line | | | | |
| C.EN.101840.0001 BGTI CT106.89 CONN RIVER-BRG TIE DESIGN | Units not applicable | 10/1/2020 | 12/31/2020 | \$47,052 |
| Hull Street Bridge Strike Beam Install MP 96.89 AB Line | | | | |
| C.EN.101840.0037 BGUG CT 96.89 HULL ST-BRIDGE STRIKE BEAM INSTALL | Units not applicable | 6/1/2021 | 9/30/2021 | \$347,072 |
| Movable Bridge Mobile Catenary Design | | | | |
| C.EN.101840.0013 BGMS NED MOVEABLE BRD-MOBILE CAT DESIGN | Units not applicable | 11/1/2019 | 2/5/2021 | \$114,374 |
| Niantic Movable Bridge Grease Shield MP 116.74 AB Line | | | | |
| C.EN.101840.0035 BGMS CT116.74 NIANTIC GREASE SHIELD - B&B | Units not applicable | 7/1/2021 | 7/23/2021 | \$72,433 |
| Shaws Cove Movable Bridge Electrical Upgrades MP 122.65 AB Line | | | | |
| C.EN.101840.0031 BGMS CT122.65 SHAWS COVE ELEC UPG CONT | Units not applicable | 10/1/2020 | 11/30/2020 | \$35,137 |
| Shaws Cove Movable Bridge Shaft Bearing Upgrades MP 112.65 AB Line | | | | |
| C.EN.101840.0034 BGMS CT122.65 SHAWS COVE SHAFT BEARING UPGRADES - B&B | Units not applicable | 2/1/2021 | 3/31/2021 | \$257,349 |
| Shaws Cove Movable Bridge Wedge Screw Jack MP 122.65 AB Line | | | | |
| C.EN.101840.0023 BGMS SHAWS MP122.65-WEDGE SCREW JACK | Units not applicable | 9/17/2020 | 11/16/2020 | \$37,332 |
| Shoreline Junction Retaining Wall Replacement MP 96.89 AB Line | | | | |
| C.EN.101840.0042 WALL CT75.0 Shoreline Junction - Retaining Wall Replacement FD | Units not applicable | 1/4/2021 | 6/28/2021 | \$79,441 |
| Undergrade Bridge Cattle Pass Upgrades MP 106.89 AB Line | | | | |
| C.EN.101840.xxxx BGUG CT108.87 CATTLE PASS UPGRADES - B&B | Units not applicable | 5/3/2021 | 6/2/2021 | \$127,636 |
| Waterford, CT Culvert Replacement MP 118.21 AB Line | | | | |
| C.EN.101840.0011 CULV CT118.21 WATERFORD UPG FINAL DSN | Units not applicable | 10/1/2020 | 3/8/2021 | \$117,966 |
| G00035 - New England Substations - C.EN.101841 | | | | |

Projects include replacing the transformer at the Norton Substation (MP198.9), installing commercial power and interlocking lighting at View I/L. Replace the sump pumps at New London, Millstone, Leetes Island, and Madison. Replace the batteries at the Stonington Paralling Station and ground power at Whitfield Siding in Guilford, CT. Replace breaker relays and breaker vacuum bottle replacement at two substations and complete a substation assessment. Work to be performed by Amtrak ET Substation forces and contractor

| Guilford, CT Ground Power Whitfield Siding AB Line | | | | |
|---|---|-----------|-----------|-----------|
| C.EN.101841.0017 Ground Power Whitfield Siding Guilford, CT | Units not applicable | 10/1/2020 | 10/7/2020 | \$60,732 |
| Leetes Island Sub 80A Sump Pump AB Line | | | | |
| C.EN.101841.0015 Sump Pump Leetes Island | Units not applicable | 7/1/2021 | 7/14/2021 | \$49,478 |
| Madison Sub 80B Sump Pump AB Line | | | | |
| C.EN.101841.0016 Sump Pump Madison | Units not applicable | 6/1/2021 | 6/11/2021 | \$47,870 |
| New London & Millstone Sump Pump Replacement AB Line | | | | |
| C.EN.101841.0007 SUB NEW LONDON/MILLSTONE-PUMP REPLACE | Units not applicable | 5/3/2021 | 5/12/2021 | \$108,665 |
| Old Lyme 125 V Battery Replacement | | | | |
| C.EN.101841.0013 125V Battery Replacement - Old Lyme PS | 1 EA Install / Renew Battery, Chargers | 1/12/2021 | 1/14/2021 | \$20,396 |
| View Interlocking Commercial Power Backup AB Line | | | | |
| C.EN.101841.0014 Commercial Power Backup View I/L | Units not applicable | 3/1/2021 | 3/25/2021 | \$152,181 |

PG00036 - New England Track - C.EN.101842

Replace wood ties, concrete ties, interlocking steel, and insulated joints as well as continue joint elimination across the AS Line in Connecticut and Rhode Island. Perform ride quality, drainage, and road bed improvements through spot surfacing, spot undercutting, ditching and grading across the AS Line in Connecticut and Massachusetts and the AB Line in Connecticut and Rhode Island. Work to be performed by Amtrak Track Department forces.

C.EN.101842.0111 GEOM NED SPOT SURFACE AB LN MP72.9-122.9

| Investment Description and FY21 Scope | Units | Start Date | End Date | FY21 Budget |
|---|--|------------|------------|-------------|
| C.EN.101842.0111 GEOM NED SPOT SURFACE AB LN MP72.9-122.9 | 50000 PF Surface Track, Spot | 10/1/2020 | 9/30/2021 | \$867,102 |
| C.EN.101842.0113 BLST NED SPOT UNDRCUT AB LN-MP72.9-122.9 | | | | |
| C.EN.101842.0113 BLST NED SPOT UNDRCUT AB LN-MP72.9-122.9 | 400 FT Vacuum Train, Spot Undercut | 10/1/2020 | 10/1/2021 | \$135,575 |
| Concrete Tie Replacement MP 72.9 - 122.9 AB Line | | | | |
| C.EN.101842.0105 TIES NED CONCRETE AB LN MP72.9-122.9 | 100 EA Install Ties, Concrete | 10/1/2020 | 9/30/2021 | \$231,901 |
| Insulated Joint Removal MP 73.5 - 122.9 AB Line | | | | |
| C.EN.101842.0101 RAIL NED INSULATED JT AB LN MP72.9-122.9 | 16 EA Install Insulated Joint (Includes OTM) | 10/1/2020 | 9/30/2021 | \$184,305 |
| Interlocking Steel MP 72.9 - 122.9 AB Line | | | | |
| C.EN.101842.0109 TURN NED I/L STEEL AB LN MP72.9-122.9 | 4 EA Renew Frog | 10/1/2020 | 9/30/2021 | \$274,792 |
| Joint Elimination MP 72.9 - 122.9 AB Line | | | | |
| C.EN.101842.0103 RAIL NED JOINT ELIM AB LN MP72.9-122.9 | 55 EA Field Weld and Grind Rail (Joint Elimination) | 10/1/2020 | 9/30/2021 | \$287,807 |
| Spot Rock Scaling Drainage Improvements MP 72.9 - 122.9 AB Line | | | | |
| C.EN.101842.0212 DRAN SPOT ROCK SCALING AB LN MP72.9-122.9 | Units not applicable | 3/1/2021 | 4/30/2021 | \$198,328 |
| Wood Tie/Timber Replacement MP 72.9 - 122.9 AB Line | | | | |
| C.EN.101842.0107 TIES NED TIE/TIMB AB LN MP72.9-122.9 | 600 EA Install Ties and Timbers | 10/1/2020 | 9/30/2021 | \$472,472 |
| PG00060 - Production High Speed Surfacing - C.EN.101855 | | | | |
| 300 Miles Surfaced by PROD HSS | | | | |
| High Speed Surfacing Production MP 112.0 - 72.3 AB Line | | | | |
| C.EN.101855.0011 GEOM AB LN MP 122.9-72.3 HSS PRODUCTION - 5 | Units not applicable | 10/1/2020 | 9/30/2021 | \$1,184,302 |
| PG00062 - Track Undercutting - C.EN.100269 | | | | |
| 109,392 FT Undercutting | | | | |
| Conn to Crescent Track 1 Undercutter AB Line | | | | |
| C.EN.100269.0292 BLST CONN/CRESENT TK1-UNDERCUTTER | 3000 FT Undercut Track, Out of Face | 9/28/2020 | 10/13/2020 | \$759,872 |
| Conn to Crescent Track 2 Undercutter AB Line | | | | |
| C.EN.100269.0291 BLST CONN/CRESENT TK2-UNDERCUTTER | 3000 FT Undercut Track, Out of Face | 10/13/2020 | 10/26/2020 | \$1,044,824 |
| PG00065 - Turnout Renewal - C.EN.101860 | | | | |
| See below for further detail on planned FY21 work. | | | | |
| Shoreline Interlocking #51 Turnout | | | | |
| C.EN.101860.0042 TURN - SHORELINE JCT #51 TO - INSTALL | 1 EA Install Wood Turnout / 1 EA Install Switch Machine | 10/9/2020 | 10/13/2020 | \$730,159 |
| PG00069 - Fence Upgrades - C.EN.101854 | | | | |
| See below for further detail on planned FY21 work. | | | | |
| Madison, CT Security Fence, AB Line | | | | |
| C.EN.101854.0012 FEN AB LN MADISON CT-SECURITY FENCE | 3420 FT Install / Repair Right of Way Fencing | 3/15/2021 | 5/13/2021 | \$810,075 |

| Investment Description and FY21 Scope | Start Date | End Date | FY21 Budget |
|--|-----------------------|-------------------------|-------------------|
| BCC Eligible | | | |
| P000127 - Shaws Cove CT Swing Bridge Fender Replacement - C.EN.101584 | | | |
| Procure contractor and begin construction of fender replacement. Schedule currently forecasts completion of one c start. | hannel, and beginning | of the 2nd, in FY21 ass | uming a 10/1/2020 |
| C.EN.101584.0040 BGMS CT122.65 SHAWS COVE FENDER-CNTRTOR | 5/14/2021 | 7/13/2022 | \$4,216,889 |
| C.EN.101584.0041 BGMS CT122.65 SHAWS COVE FENDER-RWP | 5/3/2021 | 10/12/2022 | \$142,600 |
| C.EN.101584.0043 BGMS CT122.65 SHAWS COVE FENDER-C&S | 5/14/2021 | 7/13/2022 | \$109,571 |
| C.EN.101584.0044 BGMS CT122.65 SHAWS COVE FENDER-E.T. | 5/14/2021 | 7/13/2022 | \$23,294 |
| C.EN.101584.0045 BGMS CT122.65 SHAWS COVE FENDER-B&B | 5/14/2021 | 7/13/2022 | \$34,173 |
| C.EN.101584.0050 BGMS CT122.65 SHAWS COVE FENDER-CM | 10/1/2020 | 7/22/2022 | \$86,785 |
| C.EN.101584.0051 BGMS CT122.65 SHAWS COVE FENDR-CNTRTR CM | 3/1/2021 | 12/30/2022 | \$90,081 |
| C.EN.101584.0052 BGMS CT122.65 SHAWS COVE FENDER-CPS | 12/29/2020 | 12/30/2021 | \$171,584 |
| C.EN.101584.0070 BGMS CT122.65 SHAWS COVE FENDER-PM | 10/1/2020 | 12/30/2022 | \$19,250 |
| | BCC Segmen | t 5 Projects Total | \$4,894,227 |

BCC Segment 6: New Haven to CT/NY State Line (Connecticut DOT-owned)

| Investment Type | BCC Eligible | BCC Ineligible | Segment Total |
|-------------------|---------------|----------------|---------------|
| Programs/Projects | \$131,200,000 | \$0 | \$131,200,000 |
| Total | \$131,200,000 | \$0 | \$131,200,000 |

Operators: Amtrak, MNR (on behalf of CTDOT)

| Investment Description and FY21 Scope | Units | Schedule | FY21 Budget |
|--|-------|--|--------------|
| BCC Eligible | | | |
| NHL - ALL Movable Bridge Repairs | | | |
| Cos Cob Interim Repairs (DOT03010173CN). | | | |
| Complete Design and begin procurement with Metro North | | 30% Design Complete; Construction in 2022-2023 | \$6,000,000 |
| SAGA Interim Repairs (DOT03010177CN). | | | |
| Complete Design and begin procurement with Metro North | | 30% Design in September 2020, Construction in 2022-2023 | \$6,000,000 |
| NHL CT - Bridge Design | | | |
| DOT03000175PE (Bridge Design). | | | |
| On-going Program | | On-going Program | \$3,200,000 |
| NHL CT - Bridge Replacement/Repair Program | | | |
| NHL CT - Bridge Replacement/Repair Program | | | |
| On-going Program | | On-going Program | \$8,000,000 |
| NHL CT - Bridges - Atlantic Street Bridge, Stamford including Yard/Platform/Catenary | | | |
| ${\sf NHL\ CT-Bridges-Atlantic\ Street\ Bridge,\ Stamford\ including\ Yard/Platform/Catenary}$ | | | |
| Complete Construction of Bridge, Begin catenary modifications | | Catenary Work Complete 2023 | \$20,000,000 |
| NHL CT - Bridges - East Ave, Osbourne and Fort Point Bridges | | | |
| NHL CT - Bridges - East Ave, Osbourne and Fort Point Bridges | | | |
| Begin utility relocations | | Construction Complete 2025 | \$10,000,000 |
| NHL CT - Catenary Replacement | | | |
| Segments C1A and C2 - Construction (DOT03010145CN). | | | |
| Track 4 will be completed in sections C1A and C2. Conductor Rail installation on tracks 3 and 1 for section C2 on Devon Bridge. Project will be completed. | | Complete Construction 9/1/2021 | \$5,000,000 |
| NHL CT - Network Infrastructure Upgrade - All Phases | | | |
| DOT03000178CN (Network Infrastructure Upgrade Phase 2). | | | |
| Continue Construction | | Project Completion Dec. 2020 | \$3,000,000 |
| DOT03000202CN (Network Infrastructure Upgrade Phase 3). | | | |
| On-going Construction | | Project Completion Dec 2021 | \$3,000,000 |
| DOT03000202PE (Network Infrastructure Upgrade Phase 3). | | | |
| Design Phase is complete | | Design Complete | \$3,000,000 |
| DOT03000215PE (Network Infrastructure Upgrade Phase 4). | | | |

| Investment Description and FY21 Scope | Units | Schedule | FY21 Budget |
|--|--|---|---------------|
| Preliminary Engineering | | Design Complete 2022 | \$3,000,000 |
| NHL CT - Track Program (C Program) | | | |
| C-31 (DOT03000190CN). | | | |
| Purchase and install wood ties, surface track, install 17.6 track miles of new 136lb rail for various curves, purchase and install Switch at CP 272. MP 26 - MP 72 | Install wood ties; Rail Installation; Switch replacement CP 272; Out of Face Surfacing | 12/31/20 completion | \$1,000,000 |
| C-32 (DOT03000206CN). | | | |
| Purchase and install wood ties, surface track, install 14.4 track miles of new 136lb rail for various curves, purchase and install Switch at CP 271, Drainage Improvements at various location | | 0-9/21); Rail Installation (9/20-11/21); mford (9/20-12/21); Out of Face Surfacing | \$17,000,000 |
| Track and Speed Improvements (TIME) DOT03000214PE | | | |
| Initiate design and select consultant. | | Complete Design in March 2023 | \$4,000,000 |
| NHL S program/Timber Program | | | |
| DOT03000161CN (Bridge Timber Program). | | | |
| MP 33.75, MP 40.89, MP 41.28, MP 55.03 and MP 29.90, MP 29.90, MP 29.48, MP 29.68" | | 10/20-12/21 | \$2,900,000 |
| DOT03000207CN (S-23). | | | |
| MP 33.75, MP 34.17, MP 33.72, MP 43.97, MP 49.66, MP 54.58, MP 56.35, MP 57.46, MP70.36" | East Main St. MP 34.17; Elm St. MP 33.75; Hamilton St. MP 34.72; Mill River MP 49.66; Bishop Ave. MP 57.46; Park Ave. MP 54.55; Washington Ave. MP 70.36 | 10/1/20 - 9/30/21 | \$3,100,000 |
| Positive Train Control | | | |
| Positive Train Control DOT030000149CN | | | |
| Complete installation for the New Haven mainline and put all segments into Revenue Service Demonstration | | Put all segments in to RSD by December 31, 2020. | \$15,000,000 |
| Substation Repairs/Improvements | | | |
| DOT03010505CN (Sasco Creek Power Supply) DOT03010508CN (Oil Filled Circuit Brea | akers)DOT03010517CN | I (HMI) | |
| Complete Procurement of Sasco Creek Transformers, begin installation | | Start installation of Sasco Creek March 2021. | \$6,000,000 |
| Substation Replacements | | | |
| DOT03010072CN (5 Substations). DOT03010153CN (6th Substation) | | | |
| Complete Construction of Substation 524, demolish old substation | | Complete Construction 9/1/2021 | \$2,000,000 |
| | | BCC Segment 6 Total | \$131,200,000 |

BCC Segment 7: CT/NY State Line to New Rochelle (MNR-owned)

Operators: Amtrak, MNR


| Investment Type | BCC Eligible | BCC Ineligible | Segment Total |
|-----------------|--------------|----------------|---------------|
| Programs | \$3,450,000 | \$0 | \$3,450,000 |
| Projects | \$15,750,000 | \$0 | \$15,750,000 |
| Total | \$19,200,000 | \$0 | \$19,200,000 |

Programs

| Investment Description and FY21 Scope | Units | Schedule | FY21 Budget |
|---|----------------|------------------------------|-------------|
| BCC Eligible | | | |
| Comms & Signal Program | | | |
| Work may include component replacement of Communications and Signal systems | Not applicable | Ongoing | \$500,000 |
| Structures Program | | | |
| Work may include replacing deteriorated bridge culverts, bridge timbers, installing bridge walkways and ROW fencing | Not applicable | Ongoing | \$250,000 |
| System-wide Support Programs | | | |
| Ongoing work associated with the delivery of capital program projects at MNR. | Not applicable | Ongoing | \$450,000 |
| Track Programs | | | |
| Work may include track replacement, ballast and timber work, interlocking replacement, procurement of MOW equipment | Not applicable | Ongoing | \$2,250,000 |
| | | BCC Segment 7 Programs Total | \$3,450,000 |

Projects

| Investment Description and FY21 Scope | Schedule | FY21 Budget |
|---|--|--------------|
| BCC Eligible | | |
| OH Bridge Rehabilitation Program: Centre Av Bridge Replacement | | |
| Advertise 3rd party contract for design effort. Begin 3rd party design contract. | Design anticipated for FFY21 | \$2,000,000 |
| OH Bridge Rehabilitation: Design for NH Bridge replacements | | |
| Advertise 3rd party contract for design effort. Begin 3rd party design contract. | Design anticipated for FFY21 | \$2,000,000 |
| Retaining Wall Reconstruction: Port Chester Retaining Wall | | |
| Continue construction efforts | This work will require a mix of off-peak, weekend, and continuous outages on one track at a time between CP 223 and CP 229 beginning in October FFY21 to the end of FFY21. This work is planned in parallel with the replacement of Willet Av and Highland Road Bridges in Port Chester, NY. Service plans for 3-track operation in this segment have been developed by MNR with input from Amtrak. No reduction in service is expected. | \$750,000 |
| Substation 128 and 178 replacement | | |
| Complete preliminary design effort. Prepare documents for design-build procurement. Advertise 3rd party design-build procurement. | Ongoing design work is anticipated to conclude FFY21 Q3 | \$2,000,000 |
| UG Bridge Rehabilitation Program: Willet Av and Highland Rd Bridge Replacement | | |
| Continue construction efforts | This work will require a mix of off-peak, weekend, and continuous outages on one track at a time between CP 223 and CP 229 beginning in October FFY21 to the end of FFY21. This work is planned in parallel with the replacement of retaining walls in Port Chester, NY. Service plans for 3-track operation in this segment have been developed by MNR with input from Amtrak. No reduction in service is expected. | \$9,000,000 |
| | BCC Segment 7 Projects Total | \$15,750,000 |



BCC Segment 8: New Rochelle to Harold (Amtrak-owned)

Operators: Amtrak

Investment Type BCC Eligible **BCC** Ineligible **Segment Total** \$0 \$2,424,901 **Programs** \$2,424,901 **Projects** \$2,580,475 \$0 \$2,580,475 \$5,005,377 \$0 \$5,005,377 Total

Programs

| nvestment Description and FY21 Scope | Units | Start Date | End Date | FY21 Budge |
|---|--|------------|-----------|------------|
| CC Eligible | | | | |
| PG00037 - New York Catenary - C.EN.101843 | | | | |
| See below for further detail on planned FY21 work. | | | | |
| Hellgate Catenary Renewal MP 12.8 - 13.8 AG Line | | | | |
| C.EN.101843.0002 CAT HELLGATE MP12.8/13.8-CAT RENEWAL | 300 EA Install / Renew Catenary Insulators / Hardware | 10/1/2020 | 9/30/2021 | \$732,31 |
| PG00042 - New York Structures - C.EN.101847 | | | | |
| See below for further detail on planned FY21 work. | | | | |
| Sunnyside Yard Tower Q Stairs Install | | | | |
| C.EN.101847.0065 TOWR "Q" SSYD-TOWER STAIRS INSTALL | Units not applicable | 3/1/2021 | 3/31/2021 | \$71,32 |
| PG00044 - New York Track - C.EN.101849 | | | | |
| See below for further detail on planned FY21 work. | | | | |
| Drainage Improvements, AG Line, MP 14.45 | | | | |
| C.EN.101849.0143 AG LN MP14.45 DRAINAGE IMPROVEMENTS | Units not applicable | 10/1/2020 | 9/30/2021 | \$171,92 |
| High Speed Surfacing MP 18.9 - 3.7 AG Line | | | | |
| C.EN.101849.0108 GEOM NYD HSS SURFAC AG LN MP E18.9-E3.7 | 3000 PF Surface Track, Spot | 10/1/2020 | 9/30/2021 | \$33,70 |
| Insulated Joint Removal, MP 18.9 - 3.7, AG Line | | | | |
| C.EN.101849.0014 RAIL NYD INSULATED JT AG LN MPE18.9-E3.7 | 1 EA Install Insulated Joint (Includes OTM) | 10/1/2020 | 9/30/2021 | \$7,72 |
| Interlocking Steel MP 18.9 - 3.7 AG Line | | | | |
| NYD TK - Interlocking Steel Upgrades | Units not applicable | 10/1/2020 | 9/30/2021 | \$38,5 |
| Joint Elimination MP 18.9 - 3.7 AG Line | | | | |
| TK - Joint Elimination | 2 EA Field Weld and Grind Rail (Joint Elimination) | 10/1/2020 | 9/30/2021 | \$24,86 |
| Spot Surface, AG LN, MP 18.9 - 3.7 | | | | |
| C.EN.101849.0001 GEOM NYD SPOT SURFAC AG LN MP E18.9-E3.7 | 10000 PF Surface Track, Spot | 10/1/2020 | 9/30/2021 | \$203,40 |
| Vac Train MP 18.9 - 3.7 AG Line | | | | |
| NYD TK - Spot Undercut Track | 375 FT Vacuum Train, Spot Undercut | 10/1/2020 | 9/30/2021 | \$143,89 |
| Wood Tie/Timber Replacement MP 18.9 - 3.7 AG Line | | | | |
| NYD Tie Replacement | 330 EA Install Ties and Timbers | 10/1/2020 | 9/30/2021 | \$535,1 |
| PG00064 - Rail Grinding - C.EN.101794 | | | | |

| Investment Description and FY21 Scope | Units | Start Date | End Date | FY21 Budget |
|--|--|---------------|----------------|-------------|
| Rail Grinding MP .35 - 8.3 AZ Line | | | | |
| XXX6 AZ LN MP 0.35 - MP 8.3 | Units not applicable | 10/6/2020 | 10/28/2020 | \$403,053 |
| PG00069 - Fence Upgrades - C.EN.101854 | | | | |
| See below for further detail on planned FY21 work. | | | | |
| Bronx, NYC Fence Installation - MP 12.25 | | | | |
| C.EN.101854.2021.8 FEN NYC - MP12.25 BRONX FENCE INSTALL | 0 FT Install / Repair Right of Way Fencing | 8/16/2021 | 11/25/2022 | \$59,064 |
| | | BCC Segment 8 | Programs Total | \$2,424,901 |

| nvestment Description and FY21 Scope | Start Date | End Date | FY21 Budget |
|--|-------------|------------------------|-------------|
| BCC Eligible | | | |
| 2000018-Hellgate Substation 45-47 Rehabilitation -C.EN.101745 | | | |
| Complete designs for relay replacement, structural and civil rehabilitation at all three substations. breakers. Replace one 2H (138kV) breaker at Substation 46. Advertise and award contract for cons | | of replacement trolley | and feeder |
| C.EN.101745.1301 SUB HELLGATE SUB45/47 REHAB-PRELIM DSN | 9/22/2020 | 11/18/2020 | \$44,237 |
| C.EN.101745.1501 SUB HELLGATE SUB REHAB-PRELIM DSN REVIEW | 11/19/2020 | 12/10/2020 | \$10,724 |
| C.EN.101745.2101 SUB HELLGATE LINE NEW SUB-60% DESIGN | 12/11/2020 | 2/9/2021 | \$53,620 |
| C.EN.101745.2201 SUB HELLGATE LINE NEW SUB-90% DESIGN | 2/10/2021 | 4/7/2021 | \$53,620 |
| C.EN.101745.2301 SUB HELLGATE LINE NEW SUB-FINAL DESIGN | 8/31/2020 | 6/3/2021 | \$164,434 |
| C.EN.101745.2401 SUB HELLGATE LINE NEW SUB-DSN REVIEW | 12/11/2020 | 6/3/2021 | \$44,404 |
| C.EN.101745.2501 SUB HELLGATE LINE NEW SUB-DSN RWP SUPP | 9/22/2020 | 7/9/2021 | \$7,121 |
| C.EN.101745.4102 SUB HELLGATE LINE NEW SUB-TROLLEY/BRKERS | 10/14/2020 | 8/3/2021 | \$1,769,460 |
| C.EN.101745.4501 SUB HELLGATE LINE NEW SUB-CNSTRUCT E.T. | 9/16/2020 | 1/13/2022 | \$148,904 |
| C.EN.101745.4601 SUB HELLGATE LINE NEW SUB-CNSTRUCT RWP | 5/28/2021 | 4/19/2022 | \$17,158 |
| C.EN.101745.4801 SUB HELLGATE LINE NEW SUB-EQUIP RENTALS | 9/16/2020 | 11/12/2020 | \$19,437 |
| C.EN.101745.6101 SUB HELLGATE LINE NEW SUB-TEST/COMM | 8/4/2021 | 5/10/2022 | \$10,523 |
| C.EN.101745.7101 SUB HELLGATE LINE NEW SUB-PROJ. MGMT. | 10/1/2019 | 5/13/2022 | \$67,611 |
| C.EN.101745.7201 SUB HELLGATE LINE NEW SUB-PROJ. SUPPORT | 5/1/2020 | 6/16/2022 | \$6,269 |
| | BCC Segment | 8 Projects Total | \$2,580,475 |

BCC Segment 9: Harold to F Interlocking (Amtrak-owned)

 Investment Type
 BCC Eligible
 BCC Ineligible
 Segment Total

 Programs
 \$6,320,959
 \$0
 \$6,320,959

 Projects
 \$7,527,283
 \$5,920,923
 \$13,448,206

 Total
 \$13,848,242
 \$5,920,923
 \$19,769,165

Operators: Amtrak, LIRR

Programs

| nvestment Description and FY21 Scope | Units | Start Date | End Date | FY21 Budge |
|---|--|------------|-----------|------------|
| CC Eligible | | | | |
| G00039 - New York Facilities - C.EN.101845 | | | | |
| See below for further detail on planned FY21 work. | | | | |
| Sunnyside Yard MOFW Engineering Trailer Replacement | | | | |
| C.EN.101845.0017 MOFW SSYD ENG. TRAILER REPLACEMENT | Units not applicable | 10/1/2020 | 9/30/2021 | \$119,76 |
| Sunnyside Yard MOFW ET Trail Replacement | | | | |
| C.EN.101845.0020 MOFW SUNNYSIDE YD-E.T. TRAILER REPLACE | Units not applicable | 10/1/2020 | 9/30/2021 | \$119,76 |
| 2G00041 - New York Signals - C.EN.101846 | | | | |
| See below for further detail on planned FY21 work. | | | | |
| Sunnyside Yard R Switch RTU Replacement | | | | |
| C.EN.101846.0025 INT "R" SWITCH SSYD-RTU REPLACEMENT | Units not applicable | 10/1/2020 | 4/6/2021 | \$281,55 |
| 2G00043 - New York Substations - C.EN.101848 | | | | |
| See below for further detail on planned FY21 work. | | | | |
| Sunnyside Yard Frequency Converter - HVAC Replacement | | | | |
| C.EN.101848.0025 FREQ SSYD NY FREQ CONVERTER-HVAC REPLACE | Units not applicable | 10/1/2020 | 5/27/2021 | \$1,003,15 |
| PG00044 - New York Track - C.EN.101849 | | | | |
| See below for further detail on planned FY21 work. | | | | |
| Concrete Tie Replacement, AG Line, MP 3.7 - 3.0 | | | | |
| C.EN.101849.0077 TIES NYD CONCRETE AG LINE MPE3.7-E3.0 | 6 EA Install Ties, Concrete | 10/1/2020 | 9/30/2021 | \$9,91 |
| Drainage Improvements, AG Line, MP 3.7 - 3.0 | | | | |
| C.EN.101849.0101 DRAN NYD DRAINGE IMPV AG LN MPE3.7-E3.0 | Units not applicable | 10/1/2020 | 9/30/2021 | \$452,01 |
| High Speed Surfacing MP 3.7 - 3.0 AG Line | | | | |
| C.EN.101849.0109 GEOM NYD HSS SURFAC AG LN MP E3.7-E3.0 | 3000 PF Surface Track, Spot | 10/1/2020 | 9/30/2021 | \$33,70 |
| Insulated Joint Removal, MP 3.7 - 3.0, AG LN | | | | |
| C.EN.101849.0015 RAIL NYD INSULATED JT AG LN MPE3.7-E3.0 | 1 EA Install Insulated Joint (Includes OTM) | 10/1/2020 | 9/30/2021 | \$7,72 |
| Interlocking Steel MP 3.7 - 3.0 AG Line | | | | |
| NYD TK - Interlocking Steel Upgrades | Units not applicable | 10/1/2020 | 9/30/2021 | \$231,10 |
| Joint Elimination MP 3.7 - 3.0 AG Line | | | | |
| TK - Joint Elimination | 2 EA Field Weld and Grind Rail (Joint Elimination) | 10/1/2020 | 9/30/2021 | \$24,86 |

Tables include a subset of submitted capital renewal data. For complete details including BCC segment breakdown, go to nec-commission.com. Note: Long Island Rail Road's obligation is subject to revision based on actual expenditures per Amtrak-LIRR agreement.


| Investment Description and FY21 Scope | Units | Start Date | End Date | FY21 Budget |
|--|---|---------------|----------------|-------------|
| C.EN.101849.0050 RAIL NY SPOT RAIL RPL AT LN MPE3.0-E0.01 | 5500 FT Install Rail, Bolted (Includes OTM) | 10/1/2020 | 9/30/2021 | \$884,920 |
| Spot Rail Replacement MP 3.7 - 3.0 AG Line | | | | |
| C.EN.101849.0049 RAIL NYD SPOT RAIL RPL AG LN MPE3.7-E3.0 | 5950 FT Install Rail, Bolted (Includes OTM) | 10/1/2020 | 9/30/2021 | \$957,325 |
| Spot Surface, AG LN, MP 3.7 - 3.0 | | | | |
| C.EN.101849.0002 GEOM NYD SPOT SURFACE AG LN MP E3.7-E3.0 | 5500 PF Surface Track, Spot | 10/1/2020 | 9/30/2021 | \$111,872 |
| Vac Train MP 18.9 - 3.7 AG Line | | | | |
| NYD TK - Spot Undercut Track | 375 FT Vacuum Train, Spot Undercut | 10/1/2020 | 9/30/2021 | \$143,895 |
| Wood Tie/Timber Replacement MP 3.7 - 3.0 AG Line | | | | |
| NYD Tie Replacement | 330 EA Install Ties and Timbers | 10/1/2020 | 9/30/2021 | \$1,621,543 |
| PG00060 - Production High Speed Surfacing - C.EN.101855 | | | | |
| 300 Miles Surfaced by PROD HSS | | | | |
| High Speed Surfacing Production MP 3.001 AG Line | | | | |
| C.EN.101855.0025 GEOM AG LN MP E3.0- E0.01 HSS PRODUCTION - 10 | Units not applicable | 10/1/2020 | 9/30/2021 | \$126,553 |
| High Speed Surfacing Production MP 3.7 - 3.0 AG Line | | | | |
| C.EN.101855.0021 GEOM AG LN MP E3.7 - E3.0 HSS PRODUCTION - 9 | Units not applicable | 10/1/2020 | 9/30/2021 | \$109,625 |
| | | BCC Segment 9 | Programs Total | \$5,402,339 |

| P000066 - Q Interlocking C&S Equipment Replacement - C.EN.100676 Continue trenching and cross track digs, Complete phase 1 signal huts fabrication and place in field; Continue foundation work for signal houses; continue cable path CIH to Phase 1 cases; continue of cable paths from the QRT house, Commence install of swtich machines and heater for Phase 1; and set interface cases. C.EN.100676.4301 INT "Q" I/L C&S EQUIP-C&S CONSTRUCTION 8/3/2020 10/3/2025 C.EN.100676.4302 INT "Q" I/L C&S EQUIP-LANCASTER SHOP 10/1/2020 12/28/2021 C.EN.100676.4303 INT "Q" I/L C&S EQUIP-C&S COMM CONSTRUCT 10/1/2020 9/30/2021 C.EN.100676.4801 INT "Q" I/L C&S EQUIP-FORCE ACCOUNT SUPP 10/1/2020 9/30/2021 C.EN.100676.5201 INT "Q" I/L C&S EQUIP-CONSTRUCT DSN SRVS 11/2/2020 11/30/2023 C.EN.100676.7101 INT "Q" I/L C&S EQUIP-PROJECT MGT. 10/1/2020 1/3/2028 P000077 - Sunnyside Yard Frequency Converter Upgrade - C.EN.101239 Complete 30% preliminary engineering design and commence procurement of a Design Build contractor C.EN.101239.1301 FREQ SSYD-CONVERTER RPL PRELIM DSN 10/1/2020 12/28/2020 | FY21 Budget | End Date | Start Date | Investment Description and FY21 Scope |
|---|-----------------|---|---|---|
| Continue trenching and cross track digs, Complete phase 1 signal huts fabrication and place in field; Continue foundation work for signal houses; continue cable path from the QRT house, Commence install of swtich machines and heater for Phase 1; and set interface cases. C.EN.100676.4301 INT "Q" I/L C&S EQUIP-C&S CONSTRUCTION 8/3/2020 10/3/2025 C.EN.100676.4302 INT "Q" I/L C&S EQUIP-LANCASTER SHOP 10/1/2020 11/1/2020 11/1/2020 11/1/2021 C.EN.100676.4303 INT "Q" I/L C&S EQUIP-C&S COMM CONSTRUCT 10/1/2020 10/1/2020 10/1/2020 10/1/2020 11/30/2021 C.EN.100676.5201 INT "Q" I/L C&S EQUIP-FORCE ACCOUNT SUPP 10/1/2020 11/30/2023 C.EN.100676.7101 INT "Q" I/L C&S EQUIP-PROJECT MGT. 10/1/2020 11/3/2028 P000077 - Sunnyside Yard Frequency Converter Upgrade - C.EN.101239 Complete 30% preliminary engineering design and commence procurement of a Design Build contractor C.EN.101239.1301 FREQ SSYD-CONVERTER RPL PRELIM DSN 10/1/2020 8/2/2021 | | | | BCC Eligible |
| CIH to Phase 1 cases; continue of cable paths from the QRT house, Commence install of swtich machines and heater for Phase 1; and set interface cases. C.EN.100676.4301 INT "Q" I/L C&S EQUIP-C&S CONSTRUCTION 8/3/2020 10/3/2025 C.EN.100676.4302 INT "Q" I/L C&S EQUIP-LANCASTER SHOP 10/1/2020 12/28/2021 C.EN.100676.4303 INT "Q" I/L C&S EQIP-C&S COMM CONSTRUCT 10/1/2020 10/1/2020 10/1/2020 10/1/2020 7/30/2021 C.EN.100676.4801 INT "Q" I/L C&S EQUIP-FORCE ACCOUNT SUPP 10/1/2020 11/30/2023 C.EN.100676.5201 INT "Q" I/L C&S EQUIP-CONSTRUCT DSN SRVS 11/2/2020 11/30/2023 C.EN.100676.7101 INT "Q" I/L C&S EQUIP-PROJECT MGT. 10/1/2020 1/3/2028 P000077 - Sunnyside Yard Frequency Converter Upgrade - C.EN.101239 Complete 30% preliminary engineering design and commence procurement of a Design Build contractor C.EN.101239.1301 FREQ SSYD-CONVERTER RPL PRELIM DSN 10/1/2020 8/2/2021 | | | | P000066 - Q Interlocking C&S Equipment Replacement - C.EN.100676 |
| C.EN.100676.4302 INT "Q" I/L C&S EQUIP-LANCASTER SHOP 10/1/2020 11/1/2020 11/1/2020 10/11/2020 10/11/2020 10/11/2020 10/11/2020 10/11/2020 10/11/2020 10/11/2020 10/11/2020 10/11/2020 10/11/2020 10/11/2020 10/11/2020 10/11/2020 10/11/2020 10/11/2020 10/11/2020 10/11/2020 10/11/2020 11/30/2023 11/2/2020 11/30/2023 11/2/2020 11/30/2028 P000077 - Sunnyside Yard Frequency Converter Upgrade - C.EN.101239 Complete 30% preliminary engineering design and commence procurement of a Design Build contractor C.EN.101239.1301 FREQ SSYD-CONVERTER RPL PRELIM DSN 10/1/2020 8/2/2021 | hs from the new | uses; continue cable p erface cases. | dation work for signal ho r for Phase 1; and set int | Continue trenching and cross track digs, Complete phase 1 signal huts fabrication and place in field; Continue found CIH to Phase 1 cases; continue of cable paths from the QRT house, Commence install of swtich machines and heater |
| C.EN.100676.4303 INT "Q" I/L C&S EQIP-C&S COMM CONSTRUCT C.EN.100676.4801 INT "Q" I/L C&S EQUIP-FORCE ACCOUNT SUPP 10/1/2020 9/30/2021 C.EN.100676.5201 INT "Q" I/L C&S EQUIP-CONSTRUCT DSN SRVS 11/2/2020 11/30/2023 C.EN.100676.7101 INT "Q" I/L C&S EQUIP-PROJECT MGT. 10/1/2020 11/3/2028 P000077 - Sunnyside Yard Frequency Converter Upgrade - C.EN.101239 Complete 30% preliminary engineering design and commence procurement of a Design Build contractor C.EN.101239.1301 FREQ SSYD-CONVERTER RPL PRELIM DSN 10/1/2020 8/2/2021 | \$3,834,954 | 10/3/2025 | 8/3/2020 | C.EN.100676.4301 INT "Q" I/L C&S EQUIP-C&S CONSTRUCTION |
| C.EN.100676.4801 INT "Q" I/L C&S EQUIP-FORCE ACCOUNT SUPP 10/1/2020 9/30/2021 C.EN.100676.5201 INT "Q" I/L C&S EQUIP-CONSTRUCT DSN SRVS 11/2/2020 11/30/2023 C.EN.100676.7101 INT "Q" I/L C&S EQUIP-PROJECT MGT. 10/1/2020 1/3/2028 P000077 - Sunnyside Yard Frequency Converter Upgrade - C.EN.101239 Complete 30% preliminary engineering design and commence procurement of a Design Build contractor C.EN.101239.1301 FREQ SSYD-CONVERTER RPL PRELIM DSN 10/1/2020 8/2/2021 | \$1,386,691 | 12/28/2021 | 10/1/2020 | C.EN.100676.4302 INT "Q" I/L C&S EQUIP-LANCASTER SHOP |
| C.EN.100676.5201 INT "Q" I/L C&S EQUIP-CONSTRUCT DSN SRVS 11/2/2020 11/30/2023 C.EN.100676.7101 INT "Q" I/L C&S EQUIP-PROJECT MGT. 10/1/2020 1/3/2028 P000077 - Sunnyside Yard Frequency Converter Upgrade - C.EN.101239 Complete 30% preliminary engineering design and commence procurement of a Design Build contractor C.EN.101239.1301 FREQ SSYD-CONVERTER RPL PRELIM DSN 10/1/2020 8/2/2021 | \$1,101,427 | 10/11/2021 | 10/1/2020 | C.EN.100676.4303 INT "Q" I/L C&S EQIP-C&S COMM CONSTRUCT |
| C.EN.100676.7101 INT "Q" I/L C&S EQUIP-PROJECT MGT. 10/1/2020 1/3/2028 P000077 - Sunnyside Yard Frequency Converter Upgrade - C.EN.101239 Complete 30% preliminary engineering design and commence procurement of a Design Build contractor C.EN.101239.1301 FREQ SSYD-CONVERTER RPL PRELIM DSN 10/1/2020 8/2/2021 | \$106,697 | 9/30/2021 | 10/1/2020 | C.EN.100676.4801 INT "Q" I/L C&S EQUIP-FORCE ACCOUNT SUPP |
| P000077 - Sunnyside Yard Frequency Converter Upgrade - C.EN.101239 Complete 30% preliminary engineering design and commence procurement of a Design Build contractor C.EN.101239.1301 FREQ SSYD-CONVERTER RPL PRELIM DSN 10/1/2020 8/2/2021 | \$95,478 | 11/30/2023 | 11/2/2020 | C.EN.100676.5201 INT "Q" I/L C&S EQUIP-CONSTRUCT DSN SRVS |
| Complete 30% preliminary engineering design and commence procurement of a Design Build contractor C.EN.101239.1301 FREQ SSYD-CONVERTER RPL PRELIM DSN 10/1/2020 8/2/2021 | \$268,096 | 1/3/2028 | 10/1/2020 | C.EN.100676.7101 INT "Q" I/L C&S EQUIP-PROJECT MGT. |
| C.EN.101239.1301 FREQ SSYD-CONVERTER RPL PRELIM DSN 10/1/2020 8/2/2021 | | | | P000077 - Sunnyside Yard Frequency Converter Upgrade - C.EN.101239 |
| | | | | Complete 30% preliminary engineering design and commence procurement of a Design Build contractor |
| C.EN.101239.1501 FREQ SSYD-CONVERTER RPL PE PRELIM DSN 12/7/2020 12/28/2020 | \$413,738 | 8/2/2021 | 10/1/2020 | C.EN.101239.1301 FREQ SSYD-CONVERTER RPL PRELIM DSN |
| | \$25,201 | 12/28/2020 | 12/7/2020 | C.EN.101239.1501 FREQ SSYD-CONVERTER RPL PE PRELIM DSN |
| C.EN.101239.5101 FREQ SSYD-CONVERTER RPL CNSTRUCT MGT. 7/30/2021 10/1/2024 | \$75,329 | 10/1/2024 | 7/30/2021 | C.EN.101239.5101 FREQ SSYD-CONVERTER RPL CNSTRUCT MGT. |
| C.EN.101239.7101 FREQ SSYD-CONVERTER RPL PROJECT MGT. 10/1/2020 2/26/2025 | \$128,690 | 2/26/2025 | 10/1/2020 | C.EN.101239.7101 FREQ SSYD-CONVERTER RPL PROJECT MGT. |

 $Tables\ include\ a\ subset\ of\ submitted\ capital\ renewal\ data.\ For\ complete\ details\ including\ BCC\ segment\ breakdown,\ go\ to\ nec-commission.com.$

Note: Long Island Rail Road's obligation is subject to revision based on actual expenditures per Amtrak-LIRR agreement.

| Investment Description and FY21 Scope | Start Date | End Date | FY21 Budget |
|---|------------|------------|--------------|
| P000160 - Movable Point Frog Switch Machine Rod Replacement - C.EN.101894 | | | |
| The FY 21 scope is to complete the remaining 54 turnouts. | | | |
| C.EN.101894.0013 INT "F" I/L MP 3-MPF HST ROD REPLACE | 10/23/2020 | 11/28/2020 | \$90,981 |
| BCC Ineligible | | | |
| P000051 - Sunnyside Yard S4 Substation Relocation/Upgrades - C.EN.101792 | | | |
| Complete fabrication, installation, and commissioning of new substation. Decommission and remove existing S4 su | bstation. | | |
| C.EN.101792.4101 MOFE SUNNYSIDE YD SUB RELOCATE-CNTRCTOR | 3/2/2020 | 7/2/2021 | \$5,402,162 |
| C.EN.101792.4401 MOFE SUNNYSIDE YD SUB RELOCATE-B&B CNSTR | 6/4/2021 | 7/2/2021 | \$25,725 |
| C.EN.101792.4501 MOFE SUNNYSIDE YD SUB RELOCATE-E.T CNSTR | 6/4/2021 | 7/2/2021 | \$93,759 |
| C.EN.101792.4601 MOFE SUNNYSIDE YD SUB RELOCATE-PROTECT | 10/1/2018 | 6/24/2019 | \$186,644 |
| C.EN.101792.5201 MOFE SUNNYSIDE YD SUB RELOCATE-CM | 12/3/2018 | 5/24/2019 | \$80,264 |
| C.EN.101792.6101 MOFE SUNNYSIDE YD SUB RELOCATE-TEST/COMM | 7/2/2021 | 8/27/2021 | \$42,896 |
| C.EN.101792.7101 MOFE SUNNYSIDE YD SUB RELOCATE-PM | 11/21/2017 | 6/27/2019 | \$89,474 |
| BCC Segment 9 Projects Total | | | \$13,448,206 |

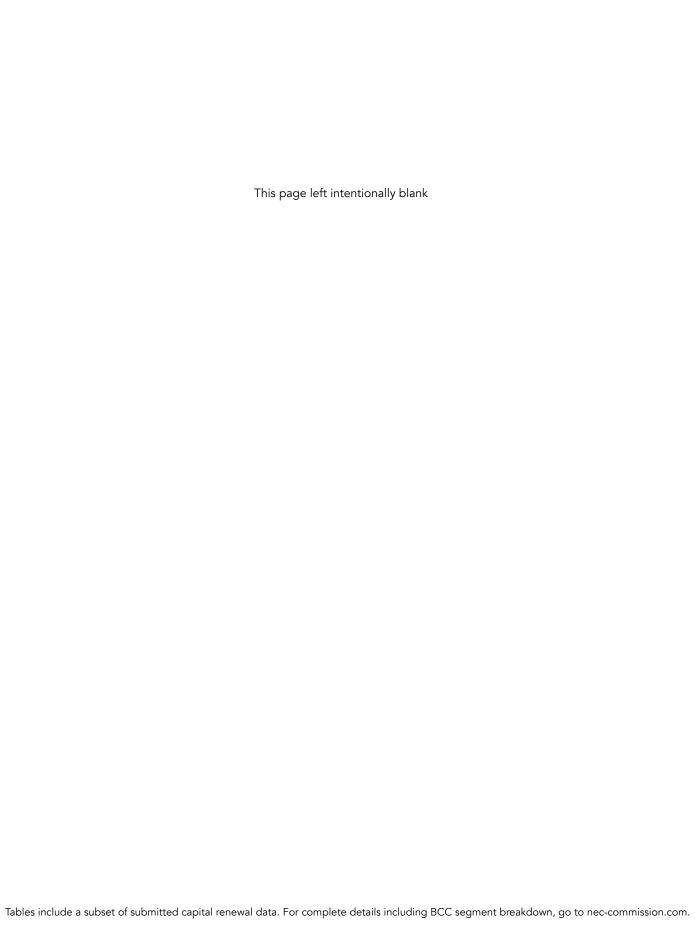

BCC Segment 10: F Interlocking to Penn Station New York (Amtrak-owned)

Operators: Amtrak, LIRR, NJT

| Investment Type | BCC Eligible | BCC Ineligible | Segment Total |
|-----------------|--------------|----------------|---------------|
| Programs | \$6,479,546 | \$0 | \$6,479,546 |
| Projects | \$966,340 | \$7,040,468 | \$8,006,808 |
| Total | \$7,445,886 | \$7,040,468 | \$14,486,353 |

Programs

| nvestment Description and FY21 Scope | Units | Start Date | End Date | FY21 Budge |
|---|----------------------|------------|------------|------------|
| BCC Eligible | | | | |
| PG00039 - New York Facilities - C.EN.101845 | | | | |
| See below for further detail on planned FY21 work. | | | | |
| East River Tunnels Lines 1-4 Emergency Access Signage Upgrades | | | | |
| C.EN.101845.HD.0000155 TUN NYD ERT LNS 1-4 EMERGENCY ACCESS SIGNAGE UPGRADES | Units not applicable | 10/1/2020 | 3/31/2021 | \$44,48 |
| PG00041 - New York Signals - C.EN.101846 | | | | |
| See below for further detail on planned FY21 work. | | | | |
| East River Tunnel Line 1 and 4 Electronic Relay Replacement | | | | |
| C.EN.101846.0014 INT NYD ERT LN1/4-ELECTRONIC RELAYS RPL | Units not applicable | 10/1/2020 | 9/30/2021 | \$268,09 |
| East River Tunnel Line 1 and 4 Relay Replacement | | | | |
| C.EN.101846.0001 INT NYD EAST ERT LN1/4-RELAYS REPLACE | Units not applicable | 10/1/2020 | 9/30/2021 | \$465,64 |
| PG00042 - New York Structures - C.EN.101847 | | | | |
| See below for further detail on planned FY21 work. | | | | |
| East Portal Lines Sump Feeder Cable Replacement | | | | |
| C.EN.101847.HD.0000466 TUN NYD EAST PORTAL LINES 2 & 3 - SUMP FEEDER CABLE REPLACEMENT/UPGRADES | Units not applicable | 10/1/2020 | 9/30/2021 | \$387,87 |
| C.EN.101847.HD.0000467 TUN NYD ERT MID RIVER LINES 3 $\&$ 4 - SUMP FEEDER CABLE REPLACEMENT/UPGRADE | Units not applicable | 10/1/2020 | 9/30/2021 | \$282,38 |
| East River Tunnel Improvements - Project Management | | | | |
| C.EN.101847.0056 TUN EAST RIVER TUNNEL IMPROVEMENTS-PM | Units not applicable | 10/1/2020 | 9/30/2021 | \$32,17 |
| East River Tunnels Benchwall Diamond Plate Improvements | | | | |
| C.EN.101847.0052 TUN ERT-BENCHWALL/DIAMOND PLATE IMPRVO | Units not applicable | 10/1/2020 | 9/30/2021 | \$80,43 |
| East River Tunnels Benchwall Handrail Replacements | | | | |
| C.EN.101847.0073 TUN ERT LINE2-BENCHWALL HANDRAIL RPL | Units not applicable | 10/1/2020 | 9/30/2021 | \$100,99 |
| C.EN.101847.0074 TUN ERT LINE3-BENCHWALL HANDRAIL RPL | Units not applicable | 10/1/2020 | 9/30/2021 | \$100,99 |
| C.EN.101847.0075 TUN ERT LINE4-BENCHWALL HANDRAIL RPL | Units not applicable | 10/1/2020 | 9/30/2021 | \$100,99 |
| East River Tunnels Emergency Power Transfer Switch | | | | |
| C.EN.101847.0054 TUN ERT LN1/4-EMGERGENCY PWR TRANSFER SW | Units not applicable | 3/1/2021 | 6/30/2021 | \$107,24 |
| East River Tunnels Fire Standpipe Improvements | | | | |
| C.EN.101847.HD.0000474 TUN NYD ERT - FIRE STANDPIPE IMPROVEMENTS | Units not applicable | 10/1/2020 | 9/30/2021 | \$463,48 |
| East River Tunnels Flood Gates Improvements | | | | |
| C.EN.101847.0051 TUN ERT LINE1/4 -FLOOD GATES IMPROVEMENT | Units not applicable | 10/1/2020 | 12/31/2020 | \$271,59 |
| East River Tunnels Leak Mitigation Improvements | | | | |
| C.EN.101847.0053 TUN ERT-LEAK MITIGATION IMPROVEMENTS | Units not applicable | 10/1/2020 | 9/30/2021 | \$414,01 |
| East River Tunnels Lighting upgrades | | | | |
| C.EN.101847.0055 TUN ERT LINES1/4-LIGHTING UPGRADES | Units not applicable | 10/1/2020 | 9/30/2021 | \$80,43 |

Tables include a subset of submitted capital renewal data. For complete details including BCC segment breakdown, go to nec-commission.com. Note: Long Island Rail Road's obligation is subject to revision based on actual expenditures per Amtrak-LIRR agreement.

| Investment Description and FY21 Scope | Units | Start Date | End Date | FY21 Budget |
|---|--|-------------|-------------------|-------------|
| PG00044 - New York Track - C.EN.101849 | | | | |
| See below for further detail on planned FY21 work. | | | | |
| Concrete Tie Replacement, AG Line, MP 3.0 -0.01 | | | | |
| C.EN.101849.0078 TIES NYD CONCRETE AG LN MPE3.0-MPE0.01 | 58 EA Install Ties, Concrete | 10/1/2020 | 9/30/2021 | \$95,795 |
| Drainage Improvements, AG Line, MP 3.0 -0.01 | | | | |
| C.EN.101849.0102 DRAN NYD DRAINGE IMPV AG LN MPE3.0-E0.01 | Units not applicable | 10/1/2020 | 9/30/2021 | \$2,189 |
| Insulated Joint Removal, MP 3.0 - 0.01, AG Line | | | | |
| C.EN.101849.0016 RAIL NYD INSULATED JT AG LN MPE3.0-E0.01 | 1 EA Install Insulated Joint (Includes OTM) | 10/1/2020 | 9/30/2021 | \$7,72 |
| Interlocking Steel MP 3.0 - 0.01 AG Line | | | | |
| NYD TK - Interlocking Steel Upgrades | Units not applicable | 10/1/2020 | 9/30/2021 | \$173,32 |
| Joint Elimination MP 3.0 - 0.01 AG Line | | | | |
| TK - Joint Elimination | 2 EA Field Weld and Grind Rail (Joint Elimination) | 10/1/2020 | 9/30/2021 | \$24,86 |
| Spot Surface, AG LN, MP 3.0 - 0.01 | | | | |
| C.EN.101849.0003 GEOM NYD SPOT SURFAC AG LN MP E3.0-E0.01 | 7000 PF Surface Track, Spot | 10/1/2020 | 9/30/2021 | \$142,38 |
| Vac Train MP 3.0 - 0.01 AG Line | | | | |
| NYD TK - Spot Undercut Track | 375 FT Vacuum Train, Spot Undercut | 10/1/2020 | 9/30/2021 | \$374,12 |
| Wood Tie/Timber Replacement MP 3.0 - 0.01 AG Line | | | | |
| NYD Tie Replacement | 330 EA Install Ties and Timbers | 10/1/2020 | 9/30/2021 | \$1,945,84 |
| PG00064 - Rail Grinding - C.EN.101794 | | | | |
| Grind 1,045 miles along the NEC in FY21. | | | | |
| Rail Grinding MP .25 - 3.18 AT Line | | | | |
| XXX7 AT LN MP 0.25 - MP 3.18 | Units not applicable | 10/22/2020 | 11/12/2020 | \$351,61 |
| PG00083 - Communications System Upgrades - C.EN.101857 | | | | |
| See below for further detail on planned FY21 work. | | | | |
| New York East Fiber Transport Upgrades | | | | |
| FY21.0011 NY EAST FIBER TRANSPORT UPGS. | Units not applicable | 10/26/2020 | 9/30/2022 | \$160,860 |
| | | BCC Seament | 10 Programs Total | \$6,479,546 |


| Investment Description and FY21 Scope | Start Date | End Date | FY21 Budget |
|--|------------|-----------|-------------|
| BCC Eligible | | | |
| P000012 - East River Tunnels Radio Antenna Replacement - C.EN.101780 | | | |
| Continue the installation of cable and hangers, removal of existing cable and installing new cable in the East River T | Tunnel. | | |
| C.EN.101780.0001 TUN ERT-LIRR ANTENNA REPLACEMENT LINE 3 | 2/4/2019 | 3/31/2021 | \$301,958 |
| C.EN.101780.0002 TUN ERT-LIRR ANTENNA REPLACEMENT LINE 4 | 2/4/2019 | 6/4/2021 | \$284,685 |
| C.EN.101780.0003 TUN ERT-PLATFORM 7/11 ANTENNA REPLACE | 1/2/2020 | 3/31/2021 | \$148,831 |

Tables include a subset of submitted capital renewal data. For complete details including BCC segment breakdown, go to nec-commission.com.

Note: Long Island Rail Road's obligation is subject to revision based on actual expenditures per Amtrak-LIRR agreement.

| Investment Description and FY21 Scope | Start Date | End Date | FY21 Budget |
|--|--------------|-------------------|--------------------|
| P000051 - Sunnyside Yard S4 Substation Relocation/Upgrades - C.EN.101792 | | | |
| Complete fabrication, installation, and commissioning of new substation. Decommission and remove existing S4 s | substation. | | |
| C.EN.101792.7201 MOFE SUNNYSIDE YD SUB RELOCATE-PROJ SUPP | 10/1/2020 | 9/29/2021 | \$21,834 |
| P000066 - Q Interlocking C&S Equipment Replacement - C.EN.100676 | | | |
| Continue trenching and cross track digs, Complete phase 1 signal huts fabrication and place in field; Continue for CIH to Phase 1 cases; continue of cable paths from the QRT house, Commence install of swtich machines and her | | | paths from the new |
| C.EN.100676.2401 INT "Q" I/L C&S EQUIP-DESIGN REVIEW | 1/2/2020 | 3/30/2020 | \$16,665 |
| P000077 - Sunnyside Yard Frequency Converter Upgrade - C.EN.101239 | | | |
| Complete 30% preliminary engineering design and commence procurement of a Design Build contractor | | | |
| C.EN.101239.1601 FREQ SSYD-CONVERTER RPL PE RWP/FLAG SUPPORT | 4/1/2020 | 3/18/2021 | \$47,434 |
| P000170-1st Avenue Ventilation Fan Upgrade -C.EN.101910 | | | |
| Procurement of Construction and Award Construction | | | |
| 1st Avenue Vent (C.EN.101910) | 10/1/2020 | 3/19/2025 | \$144,933 |
| BCC Ineligible | | | |
| P000171-River to River Railroad Resiliency Grant (R4 Grant) -C.EN.AAAAA2 | | | |
| Develop an RFP and Award Design Consultant | | | |
| River to River Railroad Resiliency Grant (R4 Grant) | 10/1/2020 | 9/30/2021 | \$525,736 |
| P000176-Sunnyside Yard Water Main Upgrades-C.EN.101913 | | | |
| FY21 Scope not available. | | | |
| B0080.4101 SUNNYSIDE YARD WATER MAIN UPGRADES - CONTRUCTION CONTRACTS | 4/1/2021 | 9/30/2022 | \$2,681,001 |
| B0080.4201 SUNNYSIDE YARD WATER MAIN UPGRADES - CONSTRUCTION TRACK | 4/1/2021 | 9/30/2022 | \$346,101 |
| B0080.4401 SUNNYSIDE YARD WATER MAIN UPGRADES - CONSTRUCTION B&B | 4/1/2021 | 9/30/2022 | \$254,019 |
| B0080.4501 SUNNYSIDE YARD WATER MAIN UPGRADES - CONSTRUCTION ET | 4/1/2021 | 9/30/2022 | \$267,865 |
| B0080.4601 SUNNYSIDE YARD WATER MAIN UPGRADES - CONSTRUCTION RWP SUPPORT | 4/1/2021 | 9/30/2022 | \$306,307 |
| B0080.5101 SUNNYSIDE YARD WATER MAIN UPGRADES - CONSTRUCTION MANAGEMENT | 4/1/2021 | 3/31/2023 | \$268,102 |
| B0080.5201 SUNNYSIDE YARD WATER MAIN UPGRADES - CONSTRUCION DESIGN SERVICES | 4/1/2021 | 3/31/2023 | \$107,241 |
| B0080.7101 SUNNYSIDE YARD WATER MAIN UPGRADES - PROJECT MANAGEMENT | 10/1/2020 | 3/31/2023 | \$96,518 |
| B0080.7201 SUNNYSIDE YARD WATER MAIN UPGRADES - PROJECT SUPORT | 10/1/2020 | 3/31/2023 | \$21,450 |
| P000181-MofE- ICT Facility Program - NY Sunnyside Yard ICT Site Analysis-C.EN.101904 | | | |
| FY21 Scope not available. | | | |
| C.EN.DDDDDD.0001 – Preliminary Design | 4/1/2021 | 12/1/2021 | \$1,358,057 |
| C.EN.DDDDDD.0002 – PE Design review | 4/1/2021 | 12/1/2021 | \$215,874 |
| C.EN.DDDDDD.0003 – PE RWP | 4/1/2021 | 12/1/2021 | \$143,916 |
| C.EN.DDDDDD.0004 – Project Management | 4/1/2021 | 12/1/2021 | \$448,279 |
| | -BCC Segment | 10 Projects Total | \$8,006,808 |

Tables include a subset of submitted capital renewal data. For complete details including BCC segment breakdown, go to nec-commission.com. Note: Long Island Rail Road's obligation is subject to revision based on actual expenditures per Amtrak-LIRR agreement.

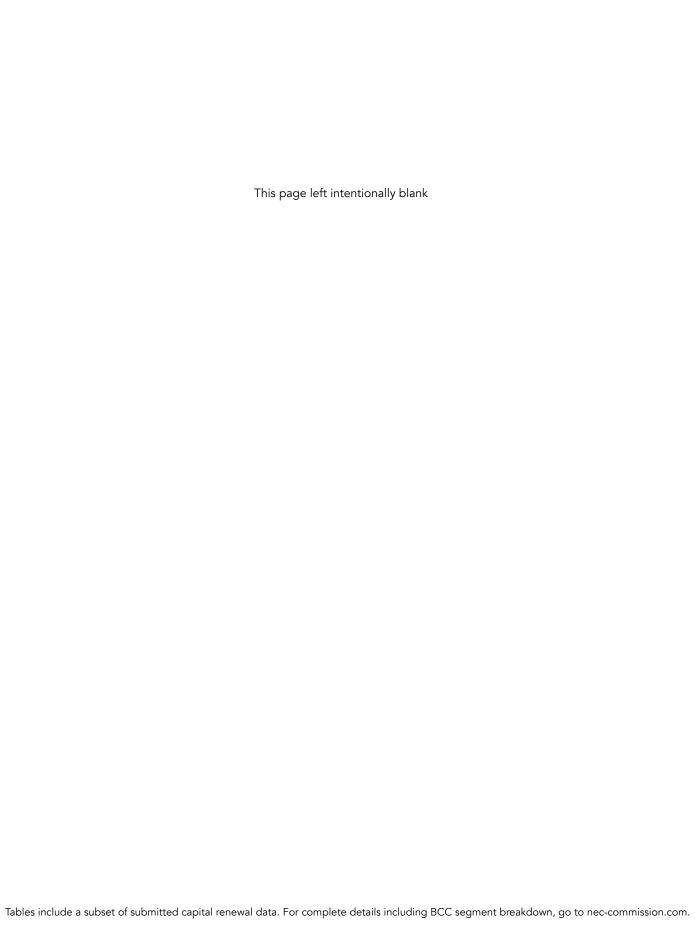

BCC Segment 11: Penn Terminal

(Amtrak-owned)

Operators: Amtrak, LIRR, NJT

Investment Type BCC Eligible BCC Ineligible Segment Total Programs \$1,568,698 \$0 \$1,568,698 Projects \$32,804,525 \$1,245,081 \$34,049,606 Total \$34,373,223 \$1,245,081 \$35,618,304

Programs

| 3 | | | | |
|--|--------------------------------|----------------|----------------|-------------|
| Investment Description and FY21 Scope | Units | Start Date | End Date | FY21 Budget |
| BCC Eligible | | | | |
| PG00039 - New York Facilities - C.EN.101845 | | | | |
| See below for further detail on planned FY21 work. | | | | |
| PSNY Fire Life Safety Facilities | | | | |
| C.EN.101845.0085 STA PSNY-LIFE SAFETY FACILITY IMPRVMENTS | Units not applicable | 12/1/2020 | 9/30/2021 | \$310,996 |
| C.EN.101845.0086 STA PSNY-LIFE SAFETY FAC IMPRVMENTS PM | Units not applicable | 12/1/2020 | 9/30/2021 | \$5,361 |
| PG00041 - New York Signals - C.EN.101846 | | | | |
| See below for further detail on planned FY21 work. | | | | |
| Penn Station LED Signal Upgrades | | | | |
| C.EN.101846.HD.0000256 INT NYD PSNY LED SIGNAL UPGRADES | Units not applicable | 10/1/2020 | 9/30/2021 | \$246,931 |
| PG00042 - New York Structures - C.EN.101847 | | | | |
| See below for further detail on planned FY21 work. | | | | |
| Penn Station Standpipe/Heat Trace | | | | |
| C.EN.101847.0094 STA PENN STA NY-STANDPIPE/HEAT TRACE | Units not applicable | 10/1/2020 | 9/30/2021 | \$115,096 |
| PG00043 - New York Substations - C.EN.101848 | | | | |
| See below for further detail on planned FY21 work. | | | | |
| Penn Station Sub 43 RTU Replacement | | | | |
| C.EN.101848.0036 SUB PENN STA #43-RTU REPLACEMENT | Units not applicable | 10/1/2020 | 9/30/2021 | \$159,568 |
| Penn Station Substation #43 31st Street - B&F Switch Replacement | | | | |
| C.EN.101848.0020 SUB PSNY #43 31st STB&F SWITCH REPLACE | Units not applicable | 10/1/2020 | 9/30/2021 | \$627,438 |
| PG00071 - Production Wood Tie/Timber Replacement - C.EN.101858 | | | | |
| See below for further detail on planned FY21 work. | | | | |
| JO Interlocking Timber Replacement | | | | |
| C.EN.101858.2021.19 TIE/TIMBER REPLACEMENT - JO | 59 EA Install Ties and Timbers | 4/26/2021 | 5/13/2021 | \$103,309 |
| | | BCC Segment 11 | Programs Total | \$2,383,147 |

Projects

| Investment Description and FY21 Scope | Start Date | End Date | FY21 Budget |
|---|------------------------|-----------------------|-----------------------|
| BCC Eligible | | | |
| P000059 - Penn Station NY - Infrastructure Renewal - C.EN.101104 | | | |
| Total track rehabilitation of Track 12, Track 9, and Track 7. Replacement of switches, including: 551/555 switch, 549/switch, 119/91 switch, 79 switch, and 123/127 switch. | ′551 switch, 131/135 s | witch, 635 switch, 12 | 7/131 switch, 119/123 |
| #55 Installation Outage - 1 | 10/16/2020 | 7/26/2021 | \$992,224 |


Tables include a subset of submitted capital renewal data. For complete details including BCC segment breakdown, go to nec-commission.com. Note: Long Island Rail Road's obligation is subject to revision based on actual expenditures per Amtrak-LIRR agreement.

| Investment Description and FY21 Scope | Start Date | End Date | FY21 Budget |
|---|------------|------------|-------------|
| 119/91 Double Slip Replacement | 7/9/2021 | 7/26/2021 | \$677,112 |
| C.EN.101104.4205 TKRN PENN STA NY YRD TKS REHAB 2C-TK | 10/2/2020 | 1/29/2021 | \$1,799,544 |
| C.EN.101104.4206 TKRN PSNY-REPLACE TK9-TRK | 6/7/2021 | 8/12/2021 | \$1,205,852 |
| C.EN.101104.4207 TKRN PSNY-REPLACE TK7-TRK | 9/1/2021 | 12/16/2021 | \$396,788 |
| C.EN.101104.4209 TURN PENN STATION NY - #635 TO REPLACEMENT - TRACK | 3/19/2021 | 3/29/2021 | \$1,283,454 |
| C.EN.101104.4210 TURN PENN STATION NY - #549/551TO REPLACEMENT - TRACK | 1/8/2021 | 1/18/2021 | \$1,892,258 |
| C.EN.101104.4211 TURN PENN STATION NY - #131/135 TO REPLACEMENT - TRACK | 2/19/2021 | 3/8/2021 | \$1,892,258 |
| C.EN.101104.4212 TURN PENN STATION NY - #127/131 TO REPLACEMENT - TRACK | 4/9/2021 | 4/26/2021 | \$1,892,258 |
| C.EN.101104.4213 TURN PENN STATION NY - #119//123 TO REPLACEMENT - TRACK | 4/30/2021 | 5/24/2021 | \$1,892,257 |
| C.EN.101104.4214 TURN PENN STATION NY - #79 TO REPLACEMENT - TRACK | 8/13/2021 | 8/23/2021 | \$1,677,778 |
| C.EN.101104.4305 TKRN PENN STA NY TKK REHAB #12 2C-C&S | 10/2/2020 | 1/29/2021 | \$1,051,168 |
| C.EN.101104.4306 TKRN PSNY-REPLACE TK9-C&S | 6/7/2021 | 8/13/2021 | \$912,967 |
| C.EN.101104.4309 TURN PENN STATION NY - #635 TO REPLACEMENT - C&S | 3/26/2021 | 3/29/2021 | \$339,317 |
| C.EN.101104.4310 TURN PENN STATION NY - #549/551 TO REPLACEMENT - C&S | 1/15/2021 | 1/18/2021 | \$455,355 |
| C.EN.101104.4311 TURN PENN STATION NY - #131/135 TO REPLACEMENT - C&S | 2/26/2021 | 3/8/2021 | \$455,355 |
| C.EN.101104.4312 TURN PENN STATION NY - #127/131 TO TO REPLACEMENT - C&S | 4/16/2021 | 4/26/2021 | \$455,355 |
| C.EN.101104.4313 TURN PENN STATION NY - #119//123 TO REPLACEMENT - C&S | 5/14/2021 | 5/24/2021 | \$455,355 |
| C.EN.101104.4314 TURN PENN STATION NY - #79 TO REPLACEMENT - C&S | 8/20/2021 | 8/23/2021 | \$197,979 |
| C.EN.101104.4402 TKRN PSNY-REPLACE TK12-B&B | 10/2/2020 | 1/29/2021 | \$3,426,757 |
| C.EN.101104.4403 TKRN PSNY-REPLACE TK9-B&B | 6/7/2021 | 8/12/2021 | \$2,346,303 |
| C.EN.101104.4505 TKRN PENN STA NY TRK REHAB #12 2C-E.T. | 10/2/2020 | 1/29/2021 | \$788,836 |
| C.EN.101104.4506 TKRN PSNY-REPLACE TK9-E.T. | 6/7/2021 | 8/13/2021 | \$655,462 |
| C.EN.101104.4509 TURN PENN STATION NY - 635 TO REPLACEMENT - ET | 3/26/2021 | 3/29/2021 | \$128,958 |
| C.EN.101104.4510 TURN PENN STATION NY - #549/551TO REPLACEMENT - ET | 1/15/2021 | 1/18/2021 | \$126,411 |
| C.EN.101104.4511 TURN PENN STATION NY - #131/135 TO REPLACEMENT - ET | 2/26/2021 | 3/8/2021 | \$102,148 |
| C.EN.101104.4512 TURN PENN STATION NY - #127/131 TO REPLACEMENT - ET | 4/16/2021 | 4/26/2021 | \$102,148 |
| C.EN.101104.4513 TURN PENN STATION NY - #119//123 TO REPLACEMENT - ET | 5/14/2021 | 5/24/2021 | \$102,148 |
| C.EN.101104.4514 TURN PENN STATION NY - #79 TO REPLACEMENT - ET | 8/20/2021 | 8/23/2021 | \$102,148 |
| C.EN.101104.4800-PH GEOM AMTK SYS - GEOM AMTK SYS TRANSPORTATION SUPPORT | 10/1/2020 | 9/30/2021 | \$519,438 |
| C.EN.101104.7000-PH GEOM AMTK SYS - GEOM AMTK SYS ; PROJECT CONTROL SUPPORT | 10/1/2020 | 9/30/2021 | \$42,897 |
| C.EN.101104.7100 STIP PSNY INFRASTRUCTURE RENEW-PM | 10/1/2020 | 9/30/2021 | \$107,242 |
| C.EN.101104.8001 TURN PSNY-INFRASTRUCT RENEW PARKING | 10/1/2020 | 9/30/2021 | \$43,753 |

Tables include a subset of submitted capital renewal data. For complete details including BCC segment breakdown, go to nec-commission.com.

Note: Long Island Rail Road's obligation is subject to revision based on actual expenditures per Amtrak-LIRR agreement.

| Investment Description and FY21 Scope | Start Date | End Date | FY21 Budget |
|---|-------------|-------------------|--------------|
| Double Slip Replacement | 10/9/2020 | 10/26/2020 | \$716,927 |
| P000060 - Penn Station NY Scada Phase II - C.EN.100081 | | | |
| Continue to develop Design Work Packages 2 and 3. Package 2 consists of system and software administration upg panel upgrades, and sump pump monitoring upgrades. Package 3 consists of PSNY substation panel upgrades, ER and network architecture upgrades. | | | |
| C.EN.100081.0001 CETC903780 SCADA-CM | 3/1/2019 | 3/1/2019 | \$361,91 |
| C.EN.100081.0002 CETC903780 SCADA-PM | 3/1/2019 | 7/21/2021 | \$95,40 |
| C.EN.100081.0005 CETC903780 SCADA-DSN CONSULT | 10/3/2016 | 3/29/2018 | \$103,62 |
| C.EN.100081.0008 CETC903780 SCADA-AMTRAK LBR | 3/1/2019 | 8/4/2021 | \$89,259 |
| C.EN.100081.0009 CETC903780 SCADA-3RD PARTY GC | 3/1/2019 | 11/16/2021 | \$1,926,786 |
| P000177-FDNY Tunnel Radio System Upgrades-C.EN.101627 | | | |
| FY21 Scope not available. | | | |
| B0078.2301-PH FDNY PSNY RADIO SYSTEM UPGRADES - FINAL DESIGN | 10/30/2020 | 12/31/2020 | \$46,49 |
| B0078.2401-PH FDNY PSNY RADIO SYSTEM UPGRADES - FINAL DESIGN REVIEW | 10/1/2020 | 10/29/2020 | \$10,72 |
| B0078.2501-PH FDNY PSNY RADIO SYSTEM UPGRADES - FD RWP/FLAG SUPPORT | 8/3/2020 | 5/4/2021 | \$2,91 |
| B0078.4301-PH FDNY PSNY RADIO SYSTEM UPGRADES - CONSTRUCTION - C&S | 5/21/2021 | 9/20/2021 | \$825,09 |
| B0078.5101-PH FDNY PSNY RADIO SYSTEM UPGRADES - CM | 8/3/2020 | 5/4/2021 | \$47,37 |
| B0078.5201-PH FDNY PSNY RADIO SYSTEM UPGRADES - CONSTRUCTION DESIGN SERVICES | 5/21/2021 | 10/20/2021 | \$28,64 |
| B0078.6101-PH FDNY PSNY RADIO SYSTEM UPGRADES - TESTING/ COMMISSIONING | 9/21/2021 | 10/20/2021 | \$3,00 |
| B0078.7101-PH FDNY PSNY RADIO SYSTEM UPGRADES - PROJECT MANAGEMENT | 8/3/2020 | 5/4/2021 | \$22,67 |
| B0078.7201-PH FDNY PSNY RADIO SYSTEM UPGRADES - PROJECT SUPPORT | 8/3/2020 | 5/4/2021 | \$4,39 |
| BCC Ineligible | | | |
| P000039 - Brookfield Overbuild Support - C.EN.100882 | | | |
| Provide protection services, perform trackwork and protect/relocate utilities | | | |
| C.EN.100882.0011 TKRN BROOKFIELD OVERBUILD S.E. TWR-C&S | 9/1/2017 | 10/29/2019 | \$119,53 |
| C.EN.100882.0013 TKRN BROOKFIELD OVERBUILD S.E. TWR-E.T. | 9/5/2017 | 12/31/2020 | \$506,74 |
| C.EN.100882.0014 TKRN BROOKFIELD OVERBUILD S.E. TWR-TRK | 1/2/2018 | 12/31/2018 | \$200,53 |
| C.EN.100882.0015 TKRN BROOKFIELD OVERBUILD S.E. TWR-PM | 11/1/2017 | 10/11/2023 | \$96,58 |
| C.EN.100882.0016 TKRN PSNY BROOKFIELD OVERBUILD-FA PROTEC | 9/1/2017 | 12/31/2020 | \$321,68 |
| C.EN.101792.6101 MOFE SUNNYSIDE YD SUB RELOCATE-TEST/COMM | 7/2/2021 | 8/27/2021 | \$42,89 |
| C.EN.101792.7101 MOFE SUNNYSIDE YD SUB RELOCATE-PM | 11/21/2017 | 6/27/2019 | \$89,47 |
| | BCC Seament | 11 Projects Total | \$34,049,606 |



BCC Segment 12: Penn Station New York to Trenton (Amtrak-owned)

Operators: Amtrak, NJT

| Investment Type | BCC Eligible | BCC Ineligible | Segment Total |
|-----------------|--------------|----------------|---------------|
| Programs | \$46,241,505 | \$0 | \$46,241,505 |
| Projects | \$46,009,533 | \$0 | \$46,009,533 |
| Total | \$92,251,038 | \$0 | \$92,251,038 |

Programs

| nvestment Description and FY21 Scope | Units | Start Date | End Date | FY21 Budget |
|---|---|------------|-----------|-------------|
| BCC Eligible | | | | |
| PG00003 - Rail Replacement - C.EN.101856 | | | | |
| 156,000 FT CWR (NEW Rail); 80,000 FT CWR (Re-purposed "FIT" Rail) | | | | |
| Bergen Curve Curve Patch Replacement AN Line | | | | |
| FY21.07 RAIL AN LINE CURVE PATCH REPL - NYD - Bergen Curve (2) | 3200 FT Install Rail, CWR (Includes OTM) | 2/18/2021 | 3/1/2021 | \$337,009 |
| Curve Patch MP 24.69 - AN Line | | | | |
| FY21.04 RAIL AN LINE CURVE PATCH REPL - NYD - Curve Patch - AN Line - MP 24.69 - RB | 3200 FT Install Rail, CWR (Includes OTM) | 1/21/2021 | 1/25/2021 | \$132,785 |
| Rail Installation - 55 Hr Outage-2 | Units not applicable | 1/21/2021 | 1/25/2021 | \$231,553 |
| Curve Patch MP 26.39 - AN Line | | | | |
| FY21.03 RAIL AN LINE CURVE PATCH REPL - NYD - Curve Patch - AN Line - MP 26.39 - RB | 3200 FT Install Rail, CWR (Includes OTM) | 1/14/2021 | 1/19/2021 | \$132,785 |
| Rail Installation - 55 Hr Outage-1 | Units not applicable | 1/14/2021 | 1/19/2021 | \$231,553 |
| Curve Patch MP 26.75 - AN Line | | | | |
| FY21.02 RAIL AN LINE CURVE PATCH REPL - NYD - Curve Patch - AN Line - MP 26.75 - RB | 3200 FT Install Rail, CWR (Includes OTM) | 1/7/2021 | 1/11/2021 | \$132,78 |
| Rail Installation - 55 Hr Outage | Units not applicable | 1/7/2021 | 1/11/2021 | \$231,553 |
| Curve Patch TBD | | | | |
| Curve Patching 2640 TF - Location TBD-20 (1/3) | 2640 FT Install Rail, CWR (Includes OTM) | 10/1/2020 | 5/31/2022 | \$22,836 |
| Ham to Midway Track 4 MP 41.6 - 55.5 AN Line | | | | |
| FY21.05 RAIL AN LINE - MP41.6-55.5 HAM TO MIDWAY TK 4 | 20000 FT Install Rail, CWR (Includes OTM) | 10/1/2020 | 9/30/2021 | \$1,204,200 |
| PG00037 - New York Catenary - C.EN.101843 | | | | |
| See below for further detail on planned FY21 work. | | | | |
| Hudson Interlocking to Lane Interlocking Catenary Upgrades AN Line | | | | |
| C.EN.101843.HD.0000039-PH CAT UPGRADES HUDSON MP7.2 to LANE MP12.3 | 31680 FT Catenary Assembly and Wire | 10/1/2020 | 9/30/2021 | \$870,67 |
| G00039 - New York Facilities - C.EN.101845 | | | | |
| See below for further detail on planned FY21 work. | | | | |
| Hunter Yard MOFE Trailer Replacement | | | | |
| C.EN.101845.0019 MOFW HUNTER YARD NJ-TRAILER REPL/UPGRDS | Units not applicable | 10/1/2020 | 9/30/2021 | \$700,150 |
| Hudson South & North Tubes Emergency Access Signage Upgrades | | | | |
| C.EN.101845.HD.0000156 TUN NYD HUDSON N/S TUBES EMERGENCY ACCESS SIGNAGE UPGRADES | Units not applicable | 10/1/2020 | 3/31/2021 | \$22,242 |
| | | | | |

| Investment Description and FY21 Scope | Units | Start Date | End Date | FY21 Budget |
|--|---------------------------------|------------|------------|-------------|
| Union Tower MOFW Field Office Renovation | | | | |
| C.EN.101845.0016 MOFW NYD UNION TOWER-FIELD OFFICE RENOV | Units not applicable | 10/1/2020 | 9/30/2021 | \$591,198 |
| PG00041 - New York Signals - C.EN.101846 | | | | |
| See below for further detail on planned FY21 work. | | | | |
| Cable Renewal MP 11 - MP 56.7 AN Line | | | | |
| C.EN.101846.HD.0000259 INT NYD AN LN MP11.0 - MP56.7 CABLE RENEWAL & REPLACEMENT | 2500 FT Install Signal Cable | 10/1/2020 | 9/30/2021 | \$257,002 |
| Elmora Interlocking RTU Upgrade MP 14.7 AN Line | | | | |
| C.EN.101846.HD.0000253-PH INT NYD ELMORA I/L MP14.7 - RTU UPGRADE | Units not applicable | 10/1/2020 | 9/30/2021 | \$150,667 |
| Event Recorder Upgrades at Menlo, Iselin, Portal and Lack Interlockings | | | | |
| C.EN.101846.HD.0000251-PH INT NYD MENLO, ISELIN, PORTAL & LACK I/L - EVENT RECORDER UPGRADES (4) | Units not applicable | 10/1/2020 | 9/30/2021 | \$132,815 |
| Hunter Interlocking West End LED Upgrade | | | | |
| C.EN.101846.0021 INT NYD HUNTER I/L - WEST END LED UPGR | Units not applicable | 10/1/2020 | 9/30/2021 | \$148,608 |
| Iselin Interlocking RTU Upgrade MP 22.8 AN Line | | | | |
| C.EN.101846.HD.0000002-PH INT NYD ISELIN I/I MP22.8 RTU UPGRADE | Units not applicable | 10/1/2020 | 9/30/2021 | \$158,082 |
| Switch Machine Upgrades MP 11 - MP 56.7 AN Line | | | | |
| C.EN.101846.0075 INT NYD AN LN MP11.0-MP56.7-SW MACH | 15 EA Install Switch Machine | 10/1/2020 | 9/30/2021 | \$321,546 |
| Union Interlocking RTU Upgrades | | | | |
| C.EN.101846.0020 INT NYD UNION INTERLOCKING-RTU UPGRADES | Units not applicable | 10/1/2020 | 9/30/2021 | \$97,171 |
| PG00042 - New York Structures - C.EN.101847 | | | | |
| See below for further detail on planned FY21 work. | | | | |
| Delco Interlocking Light Fixture Replacement | | | | |
| C.EN.101847.0026 INTB DELCO I/L-LIGHT FIXTURE REPLACE | Units not applicable | 8/2/2021 | 9/30/2021 | \$158,836 |
| C.EN.101847.0031 INTB DELCO I/L-LIGHT REPLACE FINAL DSN | Units not applicable | 10/1/2020 | 12/31/2020 | \$64,998 |
| Elmora Interlocking Lighting Upgrades | | | | |
| C.EN.101847.HD.0000005 INTB NYD ELMORA I/L LIGHTING UPGRADE | Units not applicable | 10/1/2020 | 9/30/2021 | \$358,661 |
| Hazelwood Ave Retaining Wall, MP 19.72 AN Line | | | | |
| C.EN.101847.0036 WALL MP19.72 HAZELWOOD AVE-RETAIN WALL | Units not applicable | 10/1/2020 | 9/30/2021 | \$365,318 |
| Hudson Tunnel Fire Standpipe Improvements | | | | |
| C.EN.101847.HD.0000450 TUN NYD HUDSON TUNNEL FIRE STANDPIPE IMPROVEMENTS | Units not applicable | 10/1/2020 | 9/30/2021 | \$231,743 |
| North River Tunnels Flood Gates Improvements | | | | |
| C.EN.101847.0042 TUN NRT NO/SO TUBE-FLOOD GATES SILL RPL | Units not applicable | 3/1/2021 | 6/30/2021 | \$268,099 |
| North River Tunnels Leak Mitigation Improvements | | | | |
| C.EN.101847.0044 TUN NRT-LEAK MITIGATION IMPROVEMENTS | Units not applicable | 10/1/2020 | 12/31/2020 | \$293,799 |
| North River Tunnels Lighting Upgrades | | | | |
| C.EN.101847.0046 TUN NRT NO/SO TUBE-LIGHTING UPGRADES | Units not applicable | 10/1/2020 | 9/30/2021 | \$123,589 |
| North River Tunnels Project Management | | | | |
| C.EN.101847.0049 TUN NORTH RIVER TUN IMPROVEMENTS PM | Units not applicable | 10/1/2020 | 12/31/2020 | \$32,172 |
| North Tube Benchwall Rehab | | | | |
| C.EN.101847.0097 TUN NYD N. TUBE-BENCHWALL REHAB | Units not applicable | 10/1/2020 | 9/30/2021 | \$192,471 |

| nvestment Description and FY21 Scope | Units | Start Date | End Date | FY21 Budget |
|--|--|------------|-----------|-------------|
| C.EN.101847.0098 TUN NYD N. TUBE-BENCHWALL LADDERS | Units not applicable | 10/1/2020 | 9/30/2021 | \$29,714 |
| C.EN.101847.0099 TUN NYD N. TUBE-BENCHWALL LED LIGHT RPL | Units not applicable | 10/1/2020 | 9/30/2021 | \$134,09 |
| C.EN.101847.0100 TUN NYD N. TUBE-BLUE LED LIGHTING RPL | Units not applicable | 10/1/2020 | 9/30/2021 | \$27,538 |
| Parsonage Road Undergrade Bridge Strike Mitigation | | | | |
| C.EN.101847.0037-PH PARSONAGE RD STRIKE MITIGATION | Units not applicable | 10/1/2020 | 9/30/2021 | \$119,608 |
| Penn Station Tunnel Door Replacement | | | | |
| C.EN.101847.0096 TUN PSNY AREA TUN-DOOR REPLACEMENT | Units not applicable | 10/1/2020 | 9/30/2021 | \$56,00 |
| Portal Bridge MP 6.10 AN Line | | | | |
| C.EN.101847.0012 BGMS NJ006.10 PORTAL BRG-CAT REST STOPS | Units not applicable | 8/2/2021 | 8/31/2021 | \$114,96 |
| Portal Bridge Spot Timber Replacement - Movable Span | | | | |
| C.EN.101847.HD.0000468 BGMS PORTAL BRIDGE SPOT TIMBER REPLACE MOVABLE SPAN | 160 EA Install Bridge Timber | 10/1/2020 | 9/30/2021 | \$316,77 |
| Project Controls | | | | |
| C.EN.101847.2021.8001-PH STIP NEW YORK STRUCTURES PROGRAM-PRJ SUPPORT | Units not applicable | 10/1/2020 | 9/30/2021 | \$30,38 |
| Undergrade NYD Jefferson Street Walkway Parapet Replacement/Rehab | | | | |
| C.EN.101847.HD.0000469 BGUG NYD JEFFERSON ST WALKWAY PARAPET REPLACEMENT/REHAB | Units not applicable | 10/1/2020 | 9/30/2021 | \$243,19 |
| 2G00043 - New York Substations - C.EN.101848 | | | | |
| See below for further detail on planned FY21 work. | | | | |
| Hackensack Sub 42 12KV Disconnect AN Line | | | | |
| C.EN.101848.HD.0000327 SUBSTATION 42 12KV DISCONNECT | Units not applicable | 10/1/2020 | 9/30/2021 | \$276,02 |
| Hackensack Sub 42 Signal Equipment Upgrades AN Line | | | | |
| C.EN.101848.HD.0000329 SUBSTATION 42 SIGNAL EQUIPMENT UPGRADES | Units not applicable | 10/1/2020 | 9/30/2021 | \$375,33 |
| Lincoln Switch Heater Replacement | | | | |
| C.EN.101848.HD.0000332-PH LINCOLN SWITCH HEATER REPLACEMENT | Units not applicable | 10/1/2020 | 9/30/2021 | \$394,06 |
| NYD Substation Program Management | | | | |
| C.EN.101848.9001 STIP NYD SUBSTATION PROGRAM-PM | Units not applicable | 10/1/2020 | 9/30/2021 | \$42,89 |
| Princeton Sub 35 - Trough Replacement AN Line | | | | |
| C.EN.101848.0038 SUB PRINCETON #35-TROUGH REPLACEMENT | Units not applicable | 10/1/2020 | 9/30/2021 | \$288,64 |
| Princeton Substation #35 - Signal Power Frequency Converter | | | | |
| C.EN.101848.0043 SUB PRINCETON #35-SIG PWR FREQ CNVERTR | Units not applicable | 4/1/2021 | 9/30/2021 | \$842,61 |
| Swift Interlocking Switch Heater - Substation Unit Replacement | | | | |
| C.EN.101848.0028 SWHT SWIFT I/L-SUBSTATION UNIT REPLACE | 2 EA Install / Renew Switch Heaters | 10/1/2020 | 9/30/2021 | \$753,82 |
| Waverly #40 Substation Bus/Tie Breaker Replacement | | | | |
| C.EN.101848.0024 SUB WAVERLY #40-BUS/TIE BRK REPLACE | 1 EA Install / Renew Breaker | 4/1/2021 | 9/30/2021 | \$191,58 |
| PG00044 - New York Track - C.EN.101849 | | | | |
| See below for further detail on planned FY21 work. | | | | |
| Concrete Tie Replacement, AG Line, MP 18.3 - 3.7 | | | | |
| C.EN.101849.0076 TIES NYD CONCRETE AG LINE MPE18.9-E3.7 | 20 EA Install Ties, Concrete | 10/1/2020 | 9/30/2021 | \$33,033 |
| Concrete Tie Replacement, AN Line, MP 0.1-11.0 | | | | |

| nvestment Description and FY21 Scope | Units | Start Date | End Date | FY21 Budget |
|---|--|------------|-----------|-------------|
| C.EN.101849.0080 TIES NYD CONCRETE AN LN MPW0.1-11.0 | 380 EA Install Ties, Concrete | 10/1/2020 | 9/30/2021 | \$627,620 |
| Concrete Tie Replacement, AN Line, MP 511.0-56.7 | | | | |
| C.EN.101849.0081 TIES NYD CONCRETE AN LN MP11.0-56.7 | 260 EA Install Ties, Concrete | 10/1/2020 | 9/30/2021 | \$429,424 |
| Drainage Improvements, AG Line, MP 18.3 - 3.7 | | | | |
| C.EN.101849.0100 DRAN NYD DRAINGE IMPV AG LN MPE18.9-E3.7 | Units not applicable | 10/1/2020 | 9/30/2021 | \$6,560 |
| Drainage Improvements, AN Line, MP 511.0-56.7 | | | | |
| C.EN.101849.0105 DRAN NYD DRAIN IMPV AN LN MP11.0-56.7 | Units not applicable | 10/1/2020 | 9/30/2021 | \$151,752 |
| High Speed Surfacing MP 0.1 - 11.0 AN Line | | | | |
| C.EN.101849.0112 GEOM NYD HSS SURFAC AN LN MP W0.1-11.0 | 3000 PF Surface Track, Spot | 10/1/2020 | 9/30/2021 | \$33,700 |
| High Speed Surfacing MP 11 - 56.7 AN Line | | | | |
| C.EN.101849.0113 GEOM NYD HSS SURFAC AN LN MP 11.0-56.7 | 3000 PF Surface Track, Spot | 10/1/2020 | 9/30/2021 | \$33,700 |
| Insulated Joint Removal, MP 0.01 - 11.0, AN Line | | | | |
| C.EN.101849.0018 RAIL NYD INSULATED JT AN LN MP W0.1-11.0 | 13 EA Install Insulated Joint (Includes OTM) | 10/1/2020 | 9/30/2021 | \$100,45 |
| Insulated Joint Removal, MP 11.0 - 56.7, AN Line | | | | |
| C.EN.101849.0019 RAIL NYD INSULATED JT AN LN MP11.0-56.7 | 56 EA Install Insulated Joint (Includes OTM) | 10/1/2020 | 9/30/2021 | \$432,71 |
| Interlocking Steel MP .1 - 11.0 AN Line | | | | |
| NYD TK - Interlocking Steel Upgrades | Units not applicable | 10/1/2020 | 9/30/2021 | \$1,444,392 |
| Interlocking Steel MP 11.0 - 56.7 AN Line | | | | |
| NYD TK - Interlocking Steel Upgrades | Units not applicable | 10/1/2020 | 9/30/2021 | \$2,734,70 |
| Joint Elimination MP .1 - 11.0 AN Line | | | | |
| TK - Joint Elimination | 2 EA Field Weld and Grind Rail (Joint Elimination) | 10/1/2020 | 9/30/2021 | \$372,92 |
| Joint Elimination MP 11.0 - 56.7 AN Line | | | | |
| TK - Joint Elimination | 2 EA Field Weld and Grind Rail (Joint Elimination) | 10/1/2020 | 9/30/2021 | \$1,367,396 |
| Joint Elimination PSNY - MP 10.8 AN Line | | | | |
| TK - Joint Elimination | 2 EA Field Weld and Grind Rail (Joint Elimination) | 10/1/2020 | 9/30/2021 | \$74,586 |
| Spot Rail Replacement MP .1 - 11.0 AN Line | | | | |
| C.EN.101849.0052 RAIL NYD SPOT RAIL RPL AN LN MPW0.1-11.0 | 100 FT Install Rail, Bolted (Includes OTM) | 10/1/2020 | 9/30/2021 | \$16,09° |
| Spot Rail Replacement MP 11.0 - 56.7 AN Line | , | | | |
| C.EN.101849.0053 RAIL NYD SPOT RAIL RPL AN LN MP11.0-56.7 | 50 FT Install Rail, Bolted (Includes OTM) | 10/1/2020 | 9/30/2021 | \$8,046 |
| Spot Rail Replacement MP 18.9 - 3.7 AG Line | - , | | | |
| C.EN.101849.0048 RAIL NYD SPOT RAIL RPL AG MPE18.9-E3.7 | 1250 FT Install Rail, Bolted (Includes OTM) | 10/1/2020 | 9/30/2021 | \$201,119 |

| Investment Description and FY21 Scope | Units | Start Date | End Date | FY21 Budget |
|--|---------------------------------------|------------|-----------|-------------|
| Spot Surface, AN LN, MP 0.1 - 11.0 | | | | |
| C.EN.101849.0005 GEOM NYD SPOT SURFACE AN LN MP W0.1-11.0 | 40000 PF Surface Track, Spot | 10/1/2020 | 9/30/2021 | \$813,606 |
| Spot Surface, AN LN, MP 11.0 - 56.7 | | | | |
| C.EN.101849.0006 GEOM NYD SPOT SURFAC AN LN MP W11.0-56.7 | 100000 PF Surface Track, Spot | 10/1/2020 | 9/30/2021 | \$2,034,014 |
| Spot Surface, AN LN, MP 58.3 - 76.0 | | | | |
| C.EN.101849.0008 GEOM NYD SPOT SURFACE AN LN MP58.3-76.0 | 40000 PF Surface Track, Spot | 10/1/2020 | 9/30/2021 | \$813,606 |
| Swift Interlocking Road Bed Stabilization | | | | |
| C.EN.101849.0147 RBED NYD SWIFT I/L ROAD BED STABILIZATION | Units not applicable | 10/1/2020 | 9/30/2021 | \$99,719 |
| Train Vac PSNY to MP 10.8 AE Line | | | | |
| NYD TK - Spot Undercut Track | 5 FT Vacuum Train, Spot Undercut | 10/1/2020 | 9/30/2021 | \$1,920 |
| Vac Train MP 0.1- 11.0 AN Line | | | | |
| NYD TK - Spot Undercut Track | 375 FT Vacuum Train, Spot Undercut | 10/1/2020 | 9/30/2021 | \$367,715 |
| Vac Train MP 11.0 - 56.7 AN Line | | | | |
| NYD TK - Spot Undercut Track | 375 FT Vacuum Train, Spot Undercut | 10/1/2020 | 9/30/2021 | \$1,225,716 |
| Wood Tie/Timber Replacement MP .1 - 11.0 AN Line | | | | |
| NYD Tie Replacement | 330 EA Install Ties and Timbers | 10/1/2020 | 9/30/2021 | \$1,094,541 |
| Wood Tie/Timber Replacement MP 11.0 - 56.7 AN Line | | | | |
| NYD Tie Replacement | 330 EA Install Ties and Timbers | 10/1/2020 | 9/30/2021 | \$1,864,775 |
| PG00060 - Production High Speed Surfacing - C.EN.101855 | | | | |
| 300 Miles Surfaced by PROD HSS | | | | |
| High Speed Surfacing Production MP 11.0 - 56.7 AN Line | | | | |
| C.EN.101855.0029 GEOM AN LN MP 11.0 - 56.7 HSS PRODUCTION - 12 | Units not applicable | 10/1/2020 | 9/30/2021 | \$2,090,786 |
| PG00064 - Rail Grinding - C.EN.101794 | | | | |
| Grind 1,045 miles along the NEC in FY21. | | | | |
| Rail Grinding MP .1 - 11.0 AN Line | | | | |
| XXX2 AN LN MPW0.1-11.0 | Units not applicable | 3/16/2021 | 3/23/2021 | \$81,738 |
| PG00065 - Turnout Renewal - C.EN.101860 | | | | ,,,,,, |
| See below for further detail on planned FY21 work. | | | | |
| Edison Interlocking #19 Turnout | | | | |
| C.EN.101860.0036TURN - EDISON #19 T/O - INSTALL | 1 EA Install Wood Turnout | 4/12/2021 | 4/30/2021 | \$669,824 |
| C.EN.101860.0037TURN - EDISON #19 T/O - ET SUPPORT | Units not applicable | 4/12/2021 | 4/30/2021 | \$7,410 |
| C.EN.101860.0038TURN - EDISON #19 T/O - T&E SUPPORT | Units not applicable | 4/12/2021 | 4/30/2021 | \$17,895 |
| C.EN.101860.0039TURN - EDISON #19 T/O - B&B SUPPORT | Units not applicable | 4/12/2021 | 4/30/2021 | \$14,925 |
| C.EN.101860.0040TURN - EDISON #19 T/O - C&S SUPPORT | 2 EA Install Switch Machine | 4/12/2021 | 4/30/2021 | \$185,669 |
| Edison Interlocking #21 Crossover | | | | |
| C.EN.101860.0001 TURN - EDISON #21 X/O - INSTALL | 2 EA Install Concrete Turnout | 4/12/2021 | 4/30/2021 | \$1,327,852 |

| restment Description and FY21 Scope | Units | Start Date | End Date | FY21 Budge |
|--|----------------------------------|------------|------------|------------|
| C.EN.101860.0002 TURN - EDISON #21 X/O - ET SUPPORT | Units not applicable | 4/12/2021 | 4/30/2021 | \$14,82 |
| C.EN.101860.0003 TURN - EDISON #21 X/O - T&E SUPPORT | Units not applicable | 4/12/2021 | 4/30/2021 | \$35,7 |
| C.EN.101860.0004 TURN - EDISON #21 X/O - B&B SUPPORT | Units not applicable | 4/12/2021 | 4/30/2021 | \$29,8 |
| C.EN.101860.0005 TURN - EDISON #21 X/O - C&S SUPPORT | 6 EA Install Switch Machine | 4/12/2021 | 4/30/2021 | \$371,3 |
| Fair Interlocking 0 track | | | | |
| C.EN.101860.00X2 FAIR Interlocking, 0 track-1 | Units not applicable | 11/2/2020 | 11/13/2020 | \$1,009,5 |
| Fair Interlocking North High track | | | | |
| C.EN.101860.00X3 FAIR Interlocking, North High track | Units not applicable | 11/2/2020 | 11/13/2020 | \$407,4 |
| Hunter - Lehigh Connection #65 Turnout | | | | |
| C.EN.101860.0040TURN - Hunter-Lehigh Conn #65 T/O - C&S SUPPORT | 2 EA Install Switch Machine | 3/8/2021 | 3/12/2021 | \$185,6 |
| Hunter-Lehigh Connection #65 Turnout | | | | |
| C.EN.101860.0036TURN - Hunter-Lehigh Conn #65 T/O - INSTALL | 1 EA Install Wood Turnout | 3/8/2021 | 11/27/2020 | \$669,8 |
| C.EN.101860.0037TURN - Hunter-Lehigh Conn #65 T/O - ET SUPPORT | Units not applicable | 3/8/2021 | 3/12/2021 | \$7,4 |
| C.EN.101860.0038TURN - Hunter-Lehigh Conn #65 T/O - T&E SUPPORT | Units not applicable | 3/8/2021 | 3/12/2021 | \$17,8 |
| C.EN.101860.0039TURN - Hunter-Lehigh Conn #65 T/O - B&B SUPPORT | Units not applicable | 3/8/2021 | 3/12/2021 | \$14,9 |
| Lack Interlocking #26 Turnout | | | | |
| C.EN.101860.0040TURN - LACK #26 A T/O - C&S SUPPORT | 3 EA Install Switch Machine | 3/1/2021 | 3/5/2021 | \$109,0 |
| Lack Interlocking #26A Turnout | | | | |
| C.EN.101660.0082TURN - LACK #26 A T/O - INSTALL | 1 EA Install Concrete Turnout | 3/1/2021 | 11/20/2020 | \$853,9 |
| C.EN.101860.0037TURN - LACK #26 A T/O - ET SUPPORT | Units not applicable | 3/1/2021 | 3/5/2021 | \$17,2 |
| C.EN.101860.0038TURN - LACK #26 A T/O - T&E SUPPORT | Units not applicable | 3/1/2021 | 3/5/2021 | \$27, |
| C.EN.101860.0039TURN - LACK #26 A T/O - B&B SUPPORT | Units not applicable | 3/1/2021 | 3/5/2021 | \$9, |
| Lane Interlocking #23 Crossover | | | | |
| C.EN.101860.0001 TURN - LANE #23 X/O - INSTALL | 2 EA Install Wood Turnout | 3/15/2021 | 3/31/2021 | \$1,327,8 |
| C.EN.101860.0002 TURN - LANE #23 X/O - ET SUPPORT | Units not applicable | 3/15/2021 | 4/9/2021 | \$14,8 |
| C.EN.101860.0003 TURN - LANE #23 X/O - T&E SUPPORT | Units not applicable | 3/15/2021 | 4/9/2021 | \$35, |
| C.EN.101860.0004 TURN - LANE #23 X/O - B&B SUPPORT | Units not applicable | 3/15/2021 | 4/9/2021 | \$29,8 |
| C.EN.101860.0005 TURN - LANE #23 X/O - C&S SUPPORT | 4 EA Install Switch Machine | 3/15/2021 | 4/9/2021 | \$371,3 |
| Lane Interlocking #34 Crossover | | | | |
| C.EN.101860.0001 TURN - LANE #34 X/O - INSTALL | 2 EA Install Wood Turnout | 3/15/2021 | 4/9/2021 | \$1,327,8 |
| C.EN.101860.0002 TURN - LANE #34 X/O - ET SUPPORT | Units not applicable | 3/15/2021 | 4/9/2021 | \$14,8 |
| C.EN.101860.0003 TURN - LANE #34 X/O - T&E SUPPORT | Units not applicable | 3/15/2021 | 4/9/2021 | \$35,7 |
| C.EN.101860.0004 TURN - LANE #34 X/O - B&B SUPPORT | Units not applicable | 3/15/2021 | 4/9/2021 | \$29,8 |
| C.EN.101860.0005 TURN - LANE #34 X/O - C&S SUPPORT | 4 EA Install Switch Machine | 3/15/2021 | 4/9/2021 | \$371,3 |
| 00067 - Production Concrete Tie/Timber Replacement - C.EN.101870 | | | | |
| 50 West Fair to Ham Track #1 | | | | |
| West Fair to Ham Track 4 Concrete Installation AN Line | | | | |

| nvestment Description and FY21 Scope | Units | Start Date | End Date | FY21 Budget |
|---|---|----------------------|--------------|-----------------|
| C.EN.101870.0001 TIES CONCRETE TIES W. FAIR/HAM TK4 | 550 EA Install Ties, Concrete | 12/2/2020 | 3/15/2021 | \$1,650,456 |
| PG00069 - Fence Upgrades - C.EN.101854 | | | | |
| See below for further detail on planned FY21 work. | | | | |
| Elizabeth, NJ Fence Installation - MP 15.1 | | | | |
| C.EN.101854.0040 FEN ELIZABETH NJ MP15.1-FEN INSTALL | 90 FT Install / Repair Right of Way Fencing | 10/1/2020 | 10/14/2020 | \$99,423 |
| Parsonage Road Security Fence, AN Line | | | | |
| C.EN.101854.0014 FEN AN LN PARSONAGE ROAD-SECURITY FENCE | 2200 FT Install / Repair Right of Way Fencing | 10/13/2020 | 4/6/2021 | \$518,67 |
| Princeton Junction, NJ Security Fence - MP46.8 | | | | |
| C.EN.101854.2021.36 FEN PRINCETON JCT, NJ - SECURITY FENCE (MP46.8) | 250 FT Install / Repair Right of Way Fencing | 11/9/2020 | 11/23/2020 | \$67,74 |
| PG00071 - Production Wood Tie/Timber Replacement - C.EN.101858 | | | | |
| See below for further detail on planned FY21 work. | | | | |
| Elmora to Union Track A Wood Tie Replacement | | | | |
| C.EN.101858 TIE/TIMBER REPLACEMENT - ELMORA TO UNION TK A | 4915 EA Install Ties and Timbers | 10/26/2020 | 12/23/2020 | \$1,031,47 |
| Elmora to Union Track B Wood Tie Replacement | | | | |
| C.EN.101858 TIE/TIMBER REPLACEMENT - ELMORA TO UNION TK B | 4915 EA Install Ties and Timbers | 1/4/2021 | 3/4/2021 | \$1,031,47 |
| PG00083 - Communications System Upgrades - C.EN.101857 | | | | |
| See below for further detail on planned FY21 work. | | | | |
| Edison Interlocking Central Instrument House | | | | |
| Core Manhole, Install Pipe and Hand Hole | Units not applicable | 10/26/2020 | 9/30/2021 | \$2,01 |
| Install Innerduct and Fiber | Units not applicable | 10/26/2020 | 9/30/2021 | \$5,72 |
| Labor | Units not applicable | 10/26/2020 | 9/30/2021 | \$44,55 |
| Ring Cut Splice and Terminate Fiber | Units not applicable | 10/26/2020 | 9/30/2021 | \$4,01 |
| Upgrade Network Switches | Units not applicable | 10/26/2020 | 9/30/2021 | \$5,59 |
| Menlo Interlocking Central Instrument House | | | | |
| Core Manhole, Install Pipe and Hand Hole | Units not applicable | 10/26/2020 | 9/30/2021 | \$2,01 |
| Install Innerduct and Fiber | Units not applicable | 10/26/2020 | 9/30/2021 | \$5,72 |
| Labor | Units not applicable | 10/26/2020 | 9/30/2021 | \$89,10 |
| Ring Cut Splice and Terminate Fiber | Units not applicable | 10/26/2020 | 9/30/2021 | \$4,01 |
| Upgrade Network Switches | Units not applicable | 10/26/2020 | 9/30/2021 | \$5,59 |
| Milham Interlocking MP 54.6 AN Line | 11.5 | 4.44.400.04 | 0.40.40004 | * 0.4.03 |
| C.EN.101857.0010 RAD MILHAM I/L MP54.6-COMM EQUIP REPLACE | Units not applicable | 4/1/2021 | 8/2/2021 | \$86,07 |
| 2G00085 - Amtrak Owned Positive Train CTRL (PTC) Installation - C.EN.201034 | (OTO M) | 4.0050.44 | T 101 0 | |
| FY21 Scope includes completing all boundary locations, OBC Upgrades, completion | n of STS Migration and TP upgrade | es, ACSES Monitoring | 100l Phase 2 | |
| Cape to Hudson NJT PTC Boundary Upgrade | | | | |
| C.EN.201034.0099 PTC CAPE/HUDSON NJ7.8-NJT BOUNDARY UPG | Units not applicable | 10/12/2020 | 11/20/2020 | \$150,78 |
| County to Stone NJT PTC Boundary Upgrade | | | | |
| C.EN.201034.0106 PTC COUNTY/STONE-NJT BOUNDARY UPG | Units not applicable | 11/16/2020 | 12/28/2020 | \$150,7 |

| Investment Description and FY21 Scope | Units | Start Date | End Date | FY21 Budget |
|--|----------------------|------------|------------|-------------|
| Graw to Union NJT PTC Boundary Upgrade - MP 19.7 | | | | |
| C.EN.201034.0101 PTC GRAW/UNION NJ19.7-NJT BOUNDARY UPG | Units not applicable | 10/26/2020 | 12/7/2020 | \$150,785 |
| Kearny to Swift NJT PTC Boundary Upgrade - MP 7.3 | | | | |
| C.EN.201034.0103 PTC KEARNY/SWIFT NJ7.3-NJT BOUNDARY UPG | Units not applicable | 11/9/2020 | 12/18/2020 | \$150,785 |
| Midway Interlocking Microlock II Upgrade - MP 41.3 | | | | |
| C.EN.201034.0107 ACSE MIDWAY I/L MP41.3-UPG MICROLOK II | Units not applicable | 7/1/2021 | 7/14/2021 | \$73,528 |
| Newark to High NJT PTC Boundary Upgrade - MP 10.6 | | | | |
| C.EN.201034.0100 PTC NEWARK/HIGH NJ10.6-NJT BOUNDARY UPG | Units not applicable | 10/19/2020 | 11/30/2020 | \$150,785 |
| BCC Segment 12 Programs Total | | | | |

| Investment Description and FY21 Scope | Start Date | End Date | FY21 Budget |
|--|---------------------------|------------------------|--------------------|
| BCC Eligible | | | |
| P000011 - Clark to Ham Constant Tension Upgrade - C.EN.101765 | | | |
| Total track rehabilitation of Track 12, Track 9, and Track 7. Replacement of switches, including: 551/555 switch, 54 switch, 119/91 switch, 79 switch, and 123/127 switch. | 9/551 switch, 131/135 swi | tch, 635 switch, 127/1 | 31 switch, 119/123 |
| C.EN.101765.2301 CATC CLARK/HAM-FINAL DESIGN | 12/1/2019 | 4/30/2020 | \$27,390 |
| C.EN.101765.2401 CATC CLARK/HAM-FINAL DESIGN REVIEW | 3/16/2020 | 9/14/2020 | \$7,001 |
| C.EN.101765.4101 CATC CLARK/HAM-STRUCTURE PROCUREMENT | 11/25/2020 | 9/28/2022 | \$12,400,571 |
| C.EN.101765.4105 CATC CLARK/HAM-HEADQUARTER LEASE | 10/1/2020 | 9/30/2025 | \$565,470 |
| C.EN.101765.4106 CATC CLARK/HAM-OFFICE EQUIP/SUPPLIES | 10/1/2020 | 8/29/2025 | \$30,308 |
| C.EN.101765.4107 CATC CLARK/HAM-LEASE VEHICLES | 1/4/2021 | 9/30/2025 | \$261,370 |
| C.EN.101765.4301 CATC CLARK/HAM-CONSTRUCTION C&S | 4/1/2021 | 9/30/2025 | \$273,340 |
| C.EN.101765.4401 CATC CLARK/HAM-B&B TEMP PLATFORM | 4/1/2021 | 9/30/2025 | \$3,029,726 |
| C.EN.101765.4501 CATC CLARK/HAM-POLE/PORTAL ERECTION | 6/1/2020 | 6/10/2024 | \$158,162 |
| C.EN.101765.4502 CATC CLARK/HAM-E.T. OCS ASSEMBLY/DISTRIB | 10/1/2020 | 4/30/2021 | \$345,066 |
| C.EN.101765.4601 CATC CLARK/HAM-CONSTRUCT PROTECT E.T. | 3/1/2021 | 7/25/2022 | \$589,529 |
| C.EN.101765.4602 CATC CLARK/HAM-CONSTRUCT PROTECT RWP | 3/10/2021 | 6/8/2022 | \$1,380,451 |
| C.EN.101765.4603 CATC CLARK/HAM-C&S UNDERGROUND ASSETS | 1/19/2021 | 8/4/2022 | \$520,073 |
| C.EN.101765.4801 CATC CLARK/HAM-CONSTRUCT REPAIRMEN | 4/1/2021 | 9/30/2025 | \$155,635 |
| C.EN.101765.5101 CATC CLARK/HAM-CONSTRUCT MGMT. SUPPORT | 10/1/2020 | 9/11/2026 | \$435,435 |
| C.EN.101765.5102 CATC CLARK/HAM-CONSTRUCTION MGMT. | 1/5/2021 | 5/13/2026 | \$424,595 |
| C.EN.101765.5201 CATC CLARK/HAM-CONSTRUCT DSN SRVS SUPP | 8/3/2020 | 9/30/2025 | \$86,676 |
| C.EN.101765.5202 CATC CLARK/HAM-CONSTRUCT DSN SRVS HNTB | 1/4/2021 | 5/28/2025 | \$93,959 |
| C.EN.101765.6101 CATC CLARK/HAM-TESTING/COMMISSIONING | 6/18/2021 | 6/16/2025 | \$79,630 |
| C.EN.101765.7101 CATC CLARK/HAM-PROJECT MGMT. | 10/1/2020 | 2/27/2026 | \$113,263 |
| C.EN.101765.7201 CATC CLARK/HAM-PROJECT MGMT. SUPPORT | 10/1/2020 | 2/27/2026 | \$93,484 |

| nvestment Description and FY21 Scope | Start Date | End Date | FY21 Budget |
|--|-----------------------------|--------------------------|-------------------|
| C.EN.101765.7301 CATC CLARK/HAM-LEGAL | 10/1/2020 | 3/28/2025 | \$24,598 |
| 000026 - Fair Interlocking Renewal - C.EN.101277 | | | |
| Complete conversion of switch machines and switch heaters on 12 switch. Removal and straight railing of 86 crosso of E86 turnout. Replacement of catenary sectionalizing switches and RTUs. | over. Signal modifications | and cutover of 68 tur | nout. Replacement |
| C.EN.101277.0003 WBS - ET CONSTRUCTION | 2/1/2021 | 5/24/2021 | \$710,047 |
| C.EN.101277.4101 TURN FAIR INTERLOCKING-CONTRACTOR | 10/16/2020 | 7/4/2022 | \$501,883 |
| C.EN.101277.4301 INT FAIR INTERLOCKING-CONSTRUCTION C&S | 10/19/2020 | 3/31/2021 | \$300,272 |
| C.EN.101277.4503 CAT FAIR I/L-CONSTRUCT 86E CAT MODS | 9/18/2021 | 9/25/2021 | \$226,709 |
| C.EN.101277.4504 CAT FAIR I/L-61/86 X/O DEMO CAT MODS | 11/6/2020 | 7/4/2022 | \$65,19 |
| C.EN.101277.4505 CAT FAIR I/L-SO./NO.TRK E.T. CONSTRUCT | 11/2/2020 | 12/3/2020 | \$208,21 |
| C.EN.101277.4601 TURN FAIR I/L-CONSTRUCT RWP SUPPORT | 10/1/2020 | 7/5/2022 | \$94,897 |
| C.EN.101277.4801 TURN FAIR I/L-CONSTRUCT SUPPORT OTHER | 10/16/2020 | 7/4/2022 | \$62,199 |
| C.EN.101277.7201 TURN FAIR I/L-PROJECT SUPPORT | 10/1/2020 | 9/30/2022 | \$24,11 |
| C.EN.101277.8000 INT FAIR INTERLOCKING-PROJECT MGT | 10/1/2020 | 9/30/2022 | \$88,24 |
| Fair Interlocking Design | 11/2/2020 | 3/29/2021 | \$305,67 |
| Morrisville Substation #34 Sectionalizing Upgrade | 10/15/2020 | 5/24/2021 | \$1,244,88 |
| Revisions - RH 68 T/O | 10/15/2020 | 12/18/2020 | \$655,65 |
| Switch 12 - Movement Timber Replacement | 11/2/2020 | 11/4/2020 | \$35,75 |
| Switch 86 - Remove No.10 Crossover and Straight Panel | 10/1/2020 | 11/7/2020 | \$1,619,12 |
| Switch E86 - Remove and Replace No.10 Turnout with No.15 Turnout | 8/30/2021 | 9/24/2021 | \$926,82 |
| Switch Panel - LH 12A | 11/20/2020 | 12/23/2020 | \$164,42 |
| Switch Panel - LH 12B | 12/4/2020 | 1/7/2021 | \$164,42 |
| Switch Panel - RH 86B | 10/23/2020 | 10/26/2020 | \$153,76 |
| Switch Removal - RH 86A | 10/16/2020 | 10/19/2020 | \$153,76 |
| 000036 - Kearny to Waverly Transmission Tower Upgrade - C.EN.101787 | | | |
| Obtain permits, procure contractor, and begin construction. | | | |
| C.EN.101787.4101 TRN KEARNY/WAVERLY TWR RPL-CNSTR SRVS | 12/24/2020 | 4/28/2022 | \$6,550,00 |
| C.EN.101787.4501 TRN KEARNY/WAVERLY TWR RPL-CNSTRUCT E.T. | 7/1/2021 | 7/29/2022 | \$126,43 |
| C.EN.101787.5101 TRN KEARNY/WAVERLY TWR RPL-CM | 12/24/2020 | 7/29/2022 | \$390,71 |
| C.EN.101787.5201 TRN KEARNY/WAVERLY TWR RPL-CNSTRUC DSN | 12/24/2020 | 7/29/2022 | \$224,64 |
| C.EN.101787.7101 TRN KEARNY/WAVERLY TWR RPL-PROJ. MGMT. | 10/1/2020 | 10/24/2022 | \$43,96 |
| C.EN.101787.7201 TRN KEARNY/WAVERLY TWR RPL-PROJ SUPPT. | 10/1/2020 | 10/24/2022 | \$36,39 |
| 2000042 - Metuchen Frequency Converter - Equipment Upgrades - C.EN.101747 | | | |
| Complete rotary frequency converter upgrades, provide the integration of HMI system and controls, replacement c collection systems. After physical completion continue to test, commission, accept and closeout the project. | of brush holder and the in: | stallation of a fire sup | pression and dust |
| C.EN.101747.0001 FREQ METUCHEN-ROTARY FREQ CNVRTER UPG | 10/1/2020 | 10/9/2020 | \$58,983 |

| Investment Description and FY21 Scope | Start Date | End Date | FY21 Budget |
|--|-------------------------|---------------------|----------------------|
| C.EN.101747.7101 FREQ METUCHEN RFC PHASE 2 - PROJECT MGT. | 11/1/2019 | 3/11/2021 | \$13,018 |
| P000048-New Hackensack Substation 42 Control House -C.EN.101535 | | | |
| Procure and award the construction contract, procure long lead components, review submittals, and start construction | on of site improvements | including grounding | and retaining walls. |
| C.EN.101535.2301 SUB HACKENSACK SUB 42-FINAL DESIGN | 10/1/2020 | 3/29/2021 | \$320,116 |
| C.EN.101535.7101 SUB HACKENSACK SUB42-PROJECT MGMT. | 10/1/2020 | 7/19/2023 | \$97,070 |
| C.EN.101535.7201 SUB HACKENSACK SUB42-PROJECT SUPPORT | 10/1/2020 | 7/19/2023 | \$51,777 |
| P000128 - Dock Fender Replacement - C.EN.101867 | | | |
| Start construction of the new composite fender system including navigation lighting, walkways and main power cab | les. | | |
| C.EN.101867.4101 BGMS NJ008.50 DOCK BRG FENDER-CONTACTS | 3/15/2021 | 2/27/2023 | \$1,395,534 |
| C.EN.101867.4601 BGMS NJ008.50 DOCK BRG FENDER-RWP | 3/15/2021 | 2/27/2023 | \$27,287 |
| C.EN.101867.5101 BGMS NJ008.50 DOCK BRG FENDER-CM | 5/3/2021 | 2/27/2023 | \$178,804 |
| C.EN.101867.5201 BGMS NJ008.50 DOCK BRG FENDER-DSN SRVCES | 5/3/2021 | 2/27/2023 | \$68,398 |
| C.EN.101867.7101 BGMS NJ008.50 DOCK BRG FENDER-PM | 10/1/2020 | 6/30/2023 | \$62,901 |
| P000156 - Ham Interlocking Renewal - C.EN.101308 | | | |
| Start design for the new signal system and preliminary construction effort in install signal trough and conduit. | | | |
| C.EN.101308.1301 INT HAM I/L RENEWAL-PRELIM DSN SIGNALS | 12/8/2020 | 3/8/2021 | \$321,721 |
| C.EN.101308.1302 TURN HAM I/L RENEWAL-PRELIM DSN TK/E.T. | 10/1/2020 | 2/26/2021 | \$407,512 |
| C.EN.101308.1501 INT HAM I/L RENEWAL-PRELIM DSN REVIEW | 3/1/2021 | 4/5/2021 | \$128,688 |
| C.EN.101308.2301 INT HAM I/L RENEWAL-FINAL DSN SIGNALS | 4/6/2021 | 11/4/2021 | \$616,630 |
| C.EN.101308.2302 TURN HAM I/L RENEWAL-FINAL DSN TK/E.T. | 3/15/2021 | 9/15/2021 | \$857,920 |
| C.EN.101308.2401 INT HAM I/L RENEWAL-FINAL DSN REVIEW | 5/24/2021 | 12/6/2021 | \$664,888 |
| C.EN.101308.4201-PH INT HAM I/L RENEWAL-CONSTRUCT TRK | 9/30/2021 | 4/30/2024 | \$26,840 |
| C.EN.101308.4301 INT HAM I/L RENEWAL-CONSTUCT C&S | 10/1/2020 | 7/5/2024 | \$3,364,655 |
| C.EN.101308.4501-PH INRL HAM INTERLOCKING RENEWAL PROJECT - CONSTRUCTION ET | 9/30/2021 | 7/12/2024 | \$4,162 |
| C.EN.101308.5101-PH INRL HAM INTERLOCKING RENEWAL PROJECT - CONSTRUCTION MANAGEMENT | 1/4/2021 | 3/6/2025 | \$250,314 |
| C.EN.101308.7101 INRL HAM I/L RENEWAL-PROJECT MGMT. | 10/1/2020 | 3/6/2025 | \$154,539 |
| P000160 - Movable Point Frog Switch Machine Rod Replacement - C.EN.101894 | | | |
| The FY 21 scope is to complete the remaining 54 turnouts. | | | |
| C.EN.101894.0006 INT MIDWAY I/L MP41.3-MPF HST ROD REPLAC | 2/19/2021 | 5/8/2021 | \$218,356 |
| C.EN.101894.0007 INT ADAMS I/L MP37.1-MPF HST ROD REPLACE | 5/14/2021 | 5/22/2021 | \$66,576 |
| C.EN.101894.0008 INT DELCO I/L MP33.75-MPF HST ROD REPLAC | 5/28/2021 | 6/5/2021 | \$66,577 |
| C.EN.101894.0009 INT UNION I/L MP19.7-MPF HST ROD REPLACE | 6/11/2021 | 8/21/2021 | \$200,158 |
| C.EN.101894.0010 INT LANE I/L MP12.3-MPF HST ROD REPLACE | 8/27/2021 | 9/18/2021 | \$72,785 |
| C.EN.101894.0014 INT SWIFT I/L MP7.2-MPF HST ROD REPLACE | 12/11/2020 | 1/9/2021 | \$139,362 |
| | BCC Segment ' | I2 Projects Total | \$46,009,533 |

BCC Segment 13: Trenton to Morris (Amtrak-owned)

Operators: Amtrak, NJT, SEPTA

Investment Type BCC Eligible BCC Ineligible Segment Total Programs \$1,734,158 \$0 \$1,734,158 Projects \$0 \$0 \$0 Total \$1,734,158 \$0 \$1,734,158

Programs

| 10/1/2020 10/1/2020 10/1/2020 10/1/2020 | 9/30/2021 9/30/2021 9/30/2021 9/30/2021 | \$870,67 \$2,189 \$33,700 \$7,729 |
|--|--|---|
| 10/1/2020 | 9/30/2021 9/30/2021 9/30/2021 | \$2,18° \$33,70° |
| 10/1/2020 | 9/30/2021 9/30/2021 9/30/2021 | \$2,18 ⁴ \$33,70 ⁶ |
| 10/1/2020 | 9/30/2021 9/30/2021 9/30/2021 | \$2,18° \$33,70° |
| 10/1/2020 | 9/30/2021 9/30/2021 9/30/2021 | \$2,18° \$33,70° |
| 10/1/2020 | 9/30/2021 | \$33,70 |
| 10/1/2020 | 9/30/2021 | \$33,70 |
| 10/1/2020 | 9/30/2021 | |
| 10/1/2020 | 9/30/2021 | |
| | | \$7,72 |
| | | \$7,72 |
| 10/1/2020 | 9/30/2021 | |
| 10/1/2020 | 9/30/2021 | |
| | | \$192,5 |
| | | |
| 10/1/2020 | 9/30/2021 | \$161,6 |
| | | |
| 10/1/2020 | 9/30/2021 | \$3,2 |
| | | |
| 10/1/2020 | 9/30/2021 | \$406,8 |
| | | |
| 10/1/2020 t | 9/30/2021 | \$35,0 |
| | | |
| 10/1/2020 | 9/30/2021 | \$445,92 |
| | | |
| | | |
| | | |
| | 9/30/2021 | \$280,18 |
| | 10/1/2020 | |

| Investment Description and FY21 Scope | Units | Start Date | End Date | FY21 Budget |
|--|--------------------------------|----------------------|------------------|-------------|
| See below for further detail on planned FY21 work. | | | | |
| Morris Interlocking Central Instrument House | | | | |
| Core Manhole, Install Pipe and Hand Hole | Units not applicable | 10/26/2020 | 9/30/2021 | \$2,016 |
| Install Innerduct and Fiber | Units not applicable | 10/26/2020 | 9/30/2021 | \$5,728 |
| Ring Cut Splice and Terminate Fiber | Units not applicable | 10/26/2020 | 9/30/2021 | \$4,017 |
| Upgrade Network Switches | Units not applicable | 10/26/2020 | 9/30/2021 | \$5,593 |
| PG00085 - Amtrak Owned Positive Train CTRL (PTC) Installation - C.EN.201034 | | | | |
| FY21 Scope includes completing all boundary locations, OBC Upgrades, completion of | f STS Migration and TP upgrade | es, ACSES Monitoring | Tool Phase 2 | |
| Morris Interlocking Microlok II Upgrade - MP 58.3 | | | | |
| C.EN.201034.0108 ACSE MORRIS I/L MP58.3-UPG MICROLOK II | Units not applicable | 8/2/2021 | 8/12/2021 | \$73,528 |
| | | BCC Segment 1 | 3 Projects Total | \$1,734,158 |

BCC Segment 14: Morris to Holmes (Amtrak-owned)

Operators: Amtrak, SEPTA

Investment Type BCC Eligible BCC Ineligible Segment Total Programs \$6,756,770 \$0 \$6,756,770 Projects \$0 \$0 \$0 Total \$6,756,770 \$0 \$6,756,770

Programs

| nvestment Description and FY21 Scope | Units | Start Date | End Date | FY21 Budge |
|---|---------------------------------|------------|-----------|------------|
| BCC Eligible | | | | |
| PG00017 - Mid-Atlantic North Signals - C.EN.101825 | | | | |
| See below for further detail on planned FY21 work. | | | | |
| Holmes Interlocking Hot Box Install MP 77.2 AN Line | | | | |
| INT HOLMES I/L MP77.2-DRAG/HOT BOX INSTL | Units not applicable | 10/1/2020 | 9/30/2021 | \$370,14 |
| 2G00039 - New York Facilities - C.EN.101845 | | | | |
| See below for further detail on planned FY21 work. | | | | |
| Grundy Interlocking Electrical Service Upgrades MP 65.3 AN Line | | | | |
| C.EN.101845.HD.0000161 INTB NYD GRUNDY MP65.3 ELECTRICAL SERVICE UPGRADES | Units not applicable | 4/1/2021 | 6/30/2021 | \$363,59 |
| G00041 - New York Signals - C.EN.101846 | | | | |
| See below for further detail on planned FY21 work. | | | | |
| Grundy Interlocking RTU Upgrade MP 65.3 AN Line | | | | |
| C.EN.101846.HD.0000249-PH INT NYD GRUNDY I/L MP65.3 - RTU UPGRADE | Units not applicable | 10/1/2020 | 9/30/2021 | \$158,0 |
| G00042 - New York Structures - C.EN.101847 | | | | |
| See below for further detail on planned FY21 work. | | | | |
| Bath Road New Parapet Wall MP 66.86 AN Line | | | | |
| C.EN.101847.HD.0000472 WALL NYD BATH RD MP 66.86 - INSTALL NEW PARAPET | Units not applicable | 10/1/2020 | 9/30/2021 | \$375,33 |
| Signal Bridge Fall Protection MP 64.90 AN Line | | | | |
| C.EN.101847.0016 BGSG AN LN MP64.90-SIG BRG FALL PROTECT | Units not applicable | 8/2/2021 | 9/15/2021 | \$242,9 |
| Signal Bridge Fall Protection MP 65.47 AN Line | | | | |
| C.EN.101847.0015 BGSG AN LN MP65.47-SIG BRG FALL PROTECT | Units not applicable | 5/3/2021 | 6/15/2021 | \$195,3 |
| G00043 - New York Substations - C.EN.101848 | | | | |
| See below for further detail on planned FY21 work. | | | | |
| Cornwells Substation #32 - Trough Replacement | | | | |
| C.EN.101848.0037 SUB CORNWELLS #32-TROUGH REPLACEMENT | Units not applicable | 10/1/2020 | 9/30/2021 | \$201,6 |
| Edgely Sub 33 Breaker Replacement AN Line | | | | |
| C.EN.101848.HD.0000326 SUB 33 BREAKER REPLACEMENT | Units not applicable | 10/1/2020 | 9/30/2021 | \$387,4 |
| Edgely Sub 33 New Distribution AC/DC | | | | |
| C.EN.101848.0006 SUB EDGELY #33-NEW DISTRIBUTN AC/DC BUS | 8 EA Install / Renew Breaker | 10/1/2020 | 9/30/2021 | \$123,3 |
| Grundy to Cornwell Signal Cut Section Replacement AN Line | | | | |
| C.EN.101848.HD.0000331 SIGNAL CUT SECTION REPLACEMENTS - GRUNDY TO CORNWELL | Units not applicable | 10/1/2020 | 9/30/2021 | \$252,25 |
| PG00044 - New York Track - C.EN.101849 | | | | |

| Investment Description and FY21 Scope | Units | Start Date | End Date | FY21 Budget |
|--|--|----------------|----------------|-------------|
| See below for further detail on planned FY21 work. | | | | |
| Concrete Tie Replacement, AN Line, MP 58.3 -76.0 | | | | |
| C.EN.101849.0083 TIES NYD CONCRETE AN LN MP58.3-76.0 | 58 EA Install Ties, Concrete | 10/1/2020 | 9/30/2021 | \$95,795 |
| Drainage Improvements, AN Line, MP 58.3 -76.0 | | | | |
| C.EN.101849.0107 DRAN NYD DRAIN IMPV AN LN MP58.3-76.0 | Units not applicable | 10/1/2020 | 9/30/2021 | \$87,484 |
| High Speed Surfacing MP 58.3 - 76.0 AN Line | | | | |
| C.EN.101849.0115 GEOM NYD HSS SURFAC AN LN MP58.3-76.0 | 3000 PF Surface Track, Spot | 10/1/2020 | 9/30/2021 | \$33,700 |
| Insulated Joint Removal, MP 58.3 - 76, AN Line | | | | |
| C.EN.101849.0021 RAIL NYD INSULATED JT AN LN MP58.3-76.0 | 6 EA Install Insulated Joint (Includes OTM) | 10/1/2020 | 9/30/2021 | \$46,362 |
| Interlocking Steel MP 58.3 - 76.0 AN Line | | | | |
| NYD TK - Interlocking Steel Upgrades | Units not applicable | 10/1/2020 | 9/30/2021 | \$442,945 |
| Joint Elimination MP 58.3 - 76.0 AN Line | | | | |
| TK - Joint Elimination | 2 EA Field Weld and Grind Rail (Joint Elimination) | 10/1/2020 | 9/30/2021 | \$261,049 |
| Spot Rail Replacement MP 58.3 - 76 AN Line | | | | |
| C.EN.101849.0055 RAIL NYD SPOT RAIL RPL AN LN MP58.3-76.0 | 20 FT Install Rail, Bolted (Includes OTM) | 10/1/2020 | 9/30/2021 | \$3,219 |
| Vac Train MP 58.3 - 76.0 AN Line | | | | |
| NYD TK - Spot Undercut Track | 375 FT Vacuum Train, Spot Undercut | 10/1/2020 | 9/30/2021 | \$71,292 |
| Wood Tie/Timber Replacement MP 58.3 - 76.0 AN Line | | | | |
| NYD Tie Replacement | 330 EA Install Ties and Timbers | 10/1/2020 | 9/30/2021 | \$891,851 |
| PG00060 - Production High Speed Surfacing - C.EN.101855 | | | | |
| 300 Miles Surfaced by PROD HSS | | | | |
| High Speed Surfacing Production MP 58.3 - 76.0 AN Line | | | | |
| C.EN.101855.0033 GEOM AN LN MP 58.3 - 76.0 HSS PRODUCTION - 14 | Units not applicable | 10/1/2020 | 9/30/2021 | \$2,152,935 |
| | | BCC Segment 14 | Programs Total | \$6,756,770 |


BCC Segment 15: Holmes to Shore (Amtrak-owned)

Operators: Amtrak, SEPTA

Programs

| Investment Type | BCC Eligible | BCC Ineligible | Segment Total |
|-----------------|--------------|----------------|---------------|
| Programs | \$2,101,895 | \$0 | \$2,101,895 |
| Projects | \$0 | \$0 | \$0 |
| Total | \$2,101,895 | \$0 | \$2,101,895 |

| Investment Description and FY21 Scope | Units | Start Date | End Date | FY21 Budget |
|---|---|--|---|------------------------------|
| BCC Eligible | | | | |
| PG00020 - Mid-Atlantic North Track - C.EN.101828 | | | | |
| Replace 40 insulated joints, 260 joint eliminations, 260,000 LF spot surfacing upgrades, 34,0 replacements, and 100 concrete tie replacements. The program will also complete a series of Track forces whenever possible. | 000 LF spot undercutting, of drainage improvements | 20 interlocking steel r across Mid-Atlantic S | replacements, 1,250 to South (MADS) division | imber tie utilizing MAD's |
| Concrete Tie Replacement MP 76.0 - 82.1 AN Line | | | | |
| C.EN.101828.FY2121 TIES MADN CONCRETE AN LINE MP76.0-82.1 | 11 EA Install Ties, Concrete | 11/2/2020 | 1/20/2021 | \$36,796 |
| High Speed Surfacing MP 77.2 - 82.1 AN Line | | | | |
| C.EN.101828.FY2183 GEOM MADN HSS SURFACE AN LN MP77.2-82.1 | 7500 PF Surface Track, High Speed | 11/2/2020 | 8/30/2021 | \$84,151 |
| Insulated Joint Removal MP 77.2 - 82.1 AN Line | | | | |
| C.EN.101828.FY2104 RAIL MADN INSULATE JT AN LINE MP77.2-82.1 | 6 EA Install Insulated Joint (Includes OTM) | 1/4/2021 | 2/2/2021 | \$61,208 |
| Interlocking Steel MP 77.2 - 82.1 AN Line | | | | |
| C.EN.101828.FY2151 TURN MADN I/L STEEL AN LN MP77.2-82.1 | 2 EA Renew Switch Point Stock Rail | 12/1/2020 | 12/8/2020 | \$37,325 |
| Joint Elimination MP 77.2 - 82.1 AN Line | | | | |
| C.EN.101828.0014 RAIL MADN JOINT ELIM AN LINE MP77.2-82.1 | 20 EA Field Weld and Grind Rail (Joint Elimination) | 4/14/2021 | 5/18/2021 | \$224,786 |
| Spot Surfacing MP 77.2 - 82.1 AN Line | | | | |
| C.EN.101828.FY2141 GEOM AN LN MP 76.0 - 82.1 SPOT SURFACING | 40000 PF Surface Track, Spot | 10/1/2020 | 9/28/2021 | \$554,637 |
| Spot Undercutting MP 77.2 - 82.1 AN Line | | | | |
| C.EN.101828.FY2162 BLST MAD SPOT UNDRCUT AN LN MP77.2-82.1 | 1500 FT Vacuum Train, Spot Undercut | 1/4/2021 | 1/11/2021 | \$497,066 |
| Wood Tie/Timber Replacement MP 77.2 - 82.1 AN Line | | | | |
| C.EN.101828.0031 TIES MAD TIE/TIMBER AN LINE MP77.2-82.1 | 100 EA Install Ties and Timbers | 1/4/2021 | 1/28/2021 | \$115,095 |
| PG00060 - Production High Speed Surfacing - C.EN.101855 | | | | |
| 300 Miles Surfaced by PROD HSS | | | | |
| High Speed Surfacing Production MP 76.0 - 82.1 AN Line | | | | |
| C.EN.101855.0035 GEOM AN LN MP 76.0 - 82.1 HSS PRODUCTION - 15 | Units not applicable | 10/1/2020 | 9/30/2021 | \$490,831 |
| | | BCC Segment 1 | 5 Programs Total | \$2,101,895 |



BCC Segment 16: Shore to Girard (Amtrak-owned)

Operators: Amtrak, NJT, SEPTA

Investment Description and FY21 Scope

Investment Type BCC Eligible BCC Ineligible Segment Total Programs \$15,246,845 \$0 \$15,246,845 Projects \$0 \$0 \$0 Total \$15,246,845 \$0 \$15,246,845

Start Date

End Date

FY21 Budget

Programs

| PG00017 - Mid-Atlantic North Signals - C.EN.101825 | | | | |
|--|--|----------------------|-----------------------------------|----------------------------------|
| See below for further detail on planned FY21 work. | | | | |
| Girard Interlocking RTU Replacement MP 87.7 AN Line | | | | |
| INT GIRARD I/L MP87.7-RTU REPLACEMENT | 1 EA Install / Replace RTU | 10/1/2020 | 9/30/2021 | \$131,056 |
| PG00018 - Mid-Atlantic North Structures - C.EN.101826 | | | | |
| See below for further detail on planned FY21 work. | | | | |
| 6th Street Philadelphia Undergrade Bridge Rehab MP 83.70 AN Line | | | | |
| BGUG AN LN MP83.70 6TH ST PHILA PA REHAB | 1 EA Undergrade Bridge Upgrade | 10/1/2020 | 9/30/2021 | \$214,484 |
| Mantua Signal Bridge Rehab MP 87.11 AN Line | | | | |
| BGSG MANTUA SIGNAL BRIDGE REHAB AN LINE MP087.11- | Units not applicable | 10/1/2020 | 9/30/2021 | \$160,860 |
| York Street Philadelphia Undergrade Bridge Rehab MP 85.46 AN Line | | | | |
| BGUG AN LN MP85.46 YORK ST PHILA PA REHAB | 1 EA Undergrade Bridge Upgrade | 10/1/2020 | 9/30/2021 | \$268,096 |
| PG00020 - Mid-Atlantic North Track - C.EN.101828 | | | | |
| Replace 40 insulated joints, 260 joint eliminations, 260,000 LF spot surfacing upgrades replacements, and 100 concrete tie replacements. The program will also complete a se Track forces whenever possible. | | | | |
| Concrete Tie Renlecement MP 82 1 - 87 7 AN Line | | | | |
| Concrete Tie Replacement MP 82.1 - 87.7 AN Line | 7 FA Is shall Tites | 1/45/2024 | 4/4/2021 | ¢24.000 |
| Concrete Tie Replacement MP 82.1 - 87.7 AN Line C.EN.101828.FY2122 TIES MADN CONCRETE AN LINE MP82.1-87.7 | 7 EA Install Ties, Concrete | 1/15/2021 | 4/1/2021 | \$31,888 |
| • | · | 1/15/2021 | 4/1/2021 | \$31,888 |
| C.EN.101828.FY2122 TIES MADN CONCRETE AN LINE MP82.1-87.7 | · | 1/15/2021 | 4/1/2021 8/30/2021 | \$31,888 \$84,151 |
| C.EN.101828.FY2122 TIES MADN CONCRETE AN LINE MP82.1-87.7 High Speed Surfacing MP 82.1 - 87.7 AN Line | Concrete 7500 PF Surface | | | |
| C.EN.101828.FY2122 TIES MADN CONCRETE AN LINE MP82.1-87.7 High Speed Surfacing MP 82.1 - 87.7 AN Line C.EN.101828.FY2184 GEOM MADN HSS SURFAC AN LN MP82.1 - 87.7 | Concrete 7500 PF Surface | | | |
| C.EN.101828.FY2122 TIES MADN CONCRETE AN LINE MP82.1-87.7 High Speed Surfacing MP 82.1 - 87.7 AN Line C.EN.101828.FY2184 GEOM MADN HSS SURFAC AN LN MP82.1 - 87.7 Insulated Joint Removal MP 82.1 - 87.7 AN Line | 7500 PF Surface Track, High Speed 8 EA Install Insulated Joint | 11/2/2020 | 8/30/2021 | \$84,151 |
| C.EN.101828.FY2122 TIES MADN CONCRETE AN LINE MP82.1-87.7 High Speed Surfacing MP 82.1 - 87.7 AN Line C.EN.101828.FY2184 GEOM MADN HSS SURFAC AN LN MP82.1 - 87.7 Insulated Joint Removal MP 82.1 - 87.7 AN Line C.EN.101828.FY2105 RAIL MADN INSULATE JT AN LINE MP82.1-87.7 | 7500 PF Surface Track, High Speed 8 EA Install Insulated Joint | 11/2/2020 | 8/30/2021 | \$84,151 |
| C.EN.101828.FY2122 TIES MADN CONCRETE AN LINE MP82.1-87.7 High Speed Surfacing MP 82.1 - 87.7 AN Line C.EN.101828.FY2184 GEOM MADN HSS SURFAC AN LN MP82.1 - 87.7 Insulated Joint Removal MP 82.1 - 87.7 AN Line C.EN.101828.FY2105 RAIL MADN INSULATE JT AN LINE MP82.1-87.7 Interlocking Steel MP 82.1 - 87.7 AN Line | 7500 PF Surface Track, High Speed 8 EA Install Insulated Joint (Includes OTM) | 2/3/2021 | 8/30/2021 | \$84,151 \$81,611 |
| C.EN.101828.FY2122 TIES MADN CONCRETE AN LINE MP82.1-87.7 High Speed Surfacing MP 82.1 - 87.7 AN Line C.EN.101828.FY2184 GEOM MADN HSS SURFAC AN LN MP82.1 - 87.7 Insulated Joint Removal MP 82.1 - 87.7 AN Line C.EN.101828.FY2105 RAIL MADN INSULATE JT AN LINE MP82.1-87.7 Interlocking Steel MP 82.1 - 87.7 AN Line C.EN.101828.FY2152 TURN MADN I/L STEEL AN LN MP82.1-87.7 | 7500 PF Surface Track, High Speed 8 EA Install Insulated Joint (Includes OTM) | 2/3/2021 | 8/30/2021 | \$84,151 \$81,611 \$37,325 |
| C.EN.101828.FY2122 TIES MADN CONCRETE AN LINE MP82.1-87.7 High Speed Surfacing MP 82.1 - 87.7 AN Line C.EN.101828.FY2184 GEOM MADN HSS SURFAC AN LN MP82.1 - 87.7 Insulated Joint Removal MP 82.1 - 87.7 AN Line C.EN.101828.FY2105 RAIL MADN INSULATE JT AN LINE MP82.1-87.7 Interlocking Steel MP 82.1 - 87.7 AN Line C.EN.101828.FY2152 TURN MADN I/L STEEL AN LN MP82.1-87.7 Joint Elimination MP 82.1 - 87.7 AN Line | 7500 PF Surface Track, High Speed 8 EA Install Insulated Joint (Includes OTM) 1 EA Renew Switch Point Stock Rail 10 EA Field Weld and Grind Rail (Joint | 2/3/2021 2/1/2021 | 8/30/2021 3/4/2021 2/8/2021 | \$84,151 \$81,611 |

Units

| Investment Description and FY21 Scope | Units | Start Date | End Date | FY21 Budget |
|---|---|------------|------------|-------------|
| Spot Surfacing MP 82.1 - 87.7 AN Line | | | | |
| C.EN.101828.FY2142 GEOM AN LN MP 82.1 - 87.7 SPOT SURFACING | 50000 PF Surface Track, Spot | 10/1/2020 | 9/28/2021 | \$693,291 |
| Spot Undercutting MP 82.1 - 87.7 AN Line | | | | |
| C.EN.101828.FY2163 BLST MAD SPOT UNDRCUT AN LN MP82.1-87.7 | 8000 FT Vacuum Train, Spot Undercut | 2/1/2021 | 2/8/2021 | \$2,651,012 |
| Wood Tie/Timber Replacement MP 82.1 - 87.7 AN Line | | | | |
| C.EN.101828.0032 TIES MAD TIE/TIMBER AN LINE MP82.1-87.7 | 160 EA Install Ties and Timbers | 2/1/2021 | 3/3/2021 | \$184,153 |
| PG00062 - Track Undercutting - C.EN.100269 | | | | |
| 109,392 FT Undercutting | | | | |
| Equipment Maintenance | | | | |
| C.EN.100269.8000 BLST NEC UNDERCUT-EQUIP MAINTENANCE | Units not applicable | 10/1/2020 | 11/19/2020 | \$98,531 |
| Equipment Rentals | | | | |
| C.EN.100269.9004 BLST UNDERCUTTER-EQUIPMENT RENTALS | Units not applicable | 10/1/2020 | 11/19/2020 | \$44,237 |
| Lehigh to Mantua Track 1 Undercutter AN Line | | | | |
| C.EN.100269.0284 BLST LEHIGH TO MANTUA TK 1 - UNDERCUTTER | Units not applicable | 8/31/2020 | 10/1/2020 | \$68,354 |
| C.EN.100269.0285 BLST LEHIGH TO MANTUA TK 1-E.T. SUPPORT | Units not applicable | 8/31/2020 | 10/1/2020 | \$1,546 |
| C.EN.100269.0286 BLST LEHIGH TO MANTUA TK 1-T&E. SUPPORT | Units not applicable | 8/31/2020 | 10/1/2020 | \$5,460 |
| C.EN.100269.0287 BLST LEHIGH TO MANTUA TK 1-C&S SUPPORT | Units not applicable | 8/31/2020 | 10/1/2020 | \$8,203 |
| Lehigh to Mantua Track 4 Undercutter AN Line | | | | |
| C.EN.100269.0282 BLST LEHIGH TO MANTUA TK 4 - E.T SUPPORT | Units not applicable | 10/5/2020 | 11/19/2020 | \$38,103 |
| Lehigh to Mantua Track 4 Undercutter AN Line | | | | |
| C.EN.100269.0280 BLST LEHIGH TO MANTUA TK 4 - UNDERCUTTER | 10032 FT Undercut Track, Out of Face | 10/5/2020 | 11/19/2020 | \$1,702,403 |
| C.EN.100269.0281 BLST LEHIGH TO MANTUA TK 4 - T&E SUPPORT | Units not applicable | 10/5/2020 | 11/19/2020 | \$134,549 |
| C.EN.100269.0283 BLST LEHIGH TO MANTUA TK 4 - C&S SUPPORT | Units not applicable | 10/5/2020 | 11/19/2020 | \$204,288 |
| Program Management | | | | |
| C.EN.100269.9000 BLST WAS TO NY-UNDERCUTTER PROGRAM PM | Units not applicable | 10/1/2020 | 11/19/2020 | \$43,545 |
| PG00065 - Turnout Renewal - C.EN.101860 | | | | |
| See below for further detail on planned FY21 work. | | | | |
| Lehigh Interlocking #12 Crossover | | | | |
| C.EN.101860.0021 TURN - LEHIGH #12 X/O - INSTALL | 2 EA Install Wood Turnout | 5/10/2021 | 8/27/2021 | \$1,177,363 |
| C.EN.101860.0022 TURN - LEHIGH #12 X/O - ET SUPPORT | Units not applicable | 6/21/2021 | 8/27/2021 | \$19,760 |
| C.EN.101860.0023 TURN - LEHIGH #12 X/O - T&E SUPPORT | Units not applicable | 6/21/2021 | 8/27/2021 | \$25,968 |
| C.EN.101860.0024 TURN - LEHIGH #12 X/O - B&B SUPPORT | Units not applicable | 6/21/2021 | 8/27/2021 | \$9,950 |
| C.EN.101860.0025 TURN - LEHIGH #12 X/O - C&S SUPPORT | 2 EA Install Switch Machine | 6/21/2021 | 8/27/2021 | \$110,655 |
| Lehigh Interlocking #23 Crossover | | | | |
| C.EN.101860.0021 TURN - LEHIGH #23 X/O - INSTALL | 2 EA Install Wood Turnout | 5/10/2021 | 8/27/2021 | \$1,247,261 |
| C.EN.101860.0022 TURN - LEHIGH #23 X/O - ET SUPPORT | Units not applicable | 6/21/2021 | 8/27/2021 | \$19,760 |
| C.EN.101860.0023 TURN - LEHIGH #23 X/O - T&E SUPPORT | Units not applicable | 6/21/2021 | 8/27/2021 | \$25,968 |
| C.EN.101860.0024 TURN - LEHIGH #23 X/O - B&B SUPPORT | Units not applicable | 6/21/2021 | 8/27/2021 | \$9,950 |

| nvestment Description and FY21 Scope | Units | Start Date | End Date | FY21 Budget |
|---|--------------------------------|------------|-----------|-------------|
| C.EN.101860.0025 TURN - LEHIGH #23 X/O - C&S SUPPORT | 2 EA Install Switch Machine | 6/21/2021 | 8/27/2021 | \$110,655 |
| Lehigh Interlocking #34 Crossover | | | | |
| C.EN.101860.0021 TURN - LEHIGH #34 X/O - INSTALL | 2 EA Install Wood Turnout | 5/10/2021 | 8/27/2021 | \$1,177,364 |
| C.EN.101860.0022 TURN - LEHIGH #34 X/O - ET SUPPORT | Units not applicable | 6/21/2021 | 8/27/2021 | \$19,760 |
| C.EN.101860.0023 TURN - LEHIGH #34 X/O - T&E SUPPORT | Units not applicable | 6/21/2021 | 8/27/2021 | \$25,968 |
| C.EN.101860.0024 TURN - LEHIGH #34 X/O - B&B SUPPORT | Units not applicable | 6/21/2021 | 8/27/2021 | \$9,950 |
| C.EN.101860.0025 TURN - LEHIGH #34 X/O - C&S SUPPORT | 2 EA Install Switch Machine | 6/21/2021 | 8/27/2021 | \$110,655 |
| Lehigh Interlocking #44 Turnout | | | | |
| C.EN.101860.0036TURN - LEHIGH #44 T/O - INSTALL | 1 EA Install Wood Turnout | 5/10/2021 | 8/30/2021 | \$669,824 |
| C.EN.101860.0037TURN - LEHIGH #44 T/O - ET SUPPORT | Units not applicable | 6/21/2021 | 8/27/2021 | \$7,409 |
| C.EN.101860.0038TURN - LEHIGH #44 T/O - T&E SUPPORT | Units not applicable | 6/21/2021 | 8/27/2021 | \$17,895 |
| C.EN.101860.0039TURN - LEHIGH #44 T/O - B&B SUPPORT | Units not applicable | 6/21/2021 | 8/27/2021 | \$14,926 |
| C.EN.101860.0040TURN - LEHIGH #44 T/O - C&S SUPPORT | 1 EA Install Switch Machine | 6/21/2021 | 8/27/2021 | \$185,669 |
| Lehigh Interlocking #45 Crossover | | | | |
| C.EN.101860.0021 TURN - LEHIGH #45 X/O - INSTALL | 2 EA Install Wood Turnout | 5/10/2021 | 8/27/2021 | \$1,177,364 |
| C.EN.101860.0022 TURN - LEHIGH #45 X/O - ET SUPPORT | Units not applicable | 6/21/2021 | 8/27/2021 | \$14,82 |
| C.EN.101860.0023 TURN - LEHIGH #45 X/O - T&E SUPPORT | Units not applicable | 6/21/2021 | 8/27/2021 | \$35,790 |
| C.EN.101860.0025 TURN - LEHIGH #45 X/O - C&S SUPPORT | 2 EA Install Switch Machine | 6/21/2021 | 8/27/2021 | \$371,338 |
| Lehigh Interlocking #45Crossover | | | | |
| C.EN.101860.0024 TURN - LEHIGH #45 X/O - B&B SUPPORT | Units not applicable | 6/21/2021 | 8/27/2021 | \$29,849 |
| Lehigh Interlocking #45W Crossover | | | | |
| C.EN.101860.0040TURN - LEHIGH #45W - C&S SUPPORT | 1 EA Install Switch Machine | 6/21/2021 | 8/27/2021 | \$185,669 |
| Lehigh Interlocking #45W Turnout | | | | |
| C.EN.101860.0036TURN - LEHIGH #45W T/O - INSTALL | 1 EA Install Wood Turnout | 5/10/2021 | 8/30/2021 | \$669,824 |
| C.EN.101860.0037TURN - LEHIGH #45W - ET SUPPORT | Units not applicable | 6/21/2021 | 8/27/2021 | \$7,409 |
| C.EN.101860.0038TURN - LEHIGH #45W - T&E SUPPORT | Units not applicable | 6/21/2021 | 8/27/2021 | \$17,89 |
| C.EN.101860.0039TURN - LEHIGH #45W - B&B SUPPORT | Units not applicable | 6/21/2021 | 8/27/2021 | \$14,926 |
| Mantua Interlocking #21E Crossover | | | | |
| C.EN.101860.0001 TURN - MANTUA #21E X/O - INSTALL | 2 EA Install Wood Turnout | 9/27/2021 | 9/24/2021 | \$453,895 |
| C.EN.101860.0002 TURN - MANTUA #21E X/O - ET SUPPORT | Units not applicable | 9/27/2021 | 11/5/2021 | \$1,97 |
| C.EN.101860.0003 TURN - MANTUA #21E X/O - T&E SUPPORT | Units not applicable | 9/27/2021 | 11/5/2021 | \$4,772 |
| C.EN.101860.0004 TURN - MANTUA #21E X/O - B&B SUPPORT | Units not applicable | 9/27/2021 | 11/5/2021 | \$3,980 |
| C.EN.101860.0005 TURN - MANTUA #21E X/O - C&S SUPPORT | 4 EA Install Switch Machine | 9/27/2021 | 11/5/2021 | \$49,512 |
| Mantua Interlocking #23 Crossover | | | | |
| C.EN.101860.0002 TURN - MANTUA #23 X/O - ET SUPPORT | Units not applicable | 9/27/2021 | 11/5/2021 | \$1,976 |
| C.EN.101860.0003 TURN - MANTUA #23 X/O - T&E SUPPORT | Units not applicable | 9/27/2021 | 11/5/2021 | \$4,772 |
| C.EN.101860.0004 TURN - MANTUA #23 X/O - B&B SUPPORT | Units not applicable | 9/27/2021 | 11/5/2021 | \$3,980 |

| Investment Description and FY21 Scope | Units | Start Date | End Date | FY21 Budget | |
|--|--------------------------------|----------------|----------------|--------------|--|
| C.EN.101860.0005 TURN - MANTUA #23 X/O - C&S SUPPORT | 2 EA Install Switch Machine | 9/27/2021 | 11/5/2021 | \$49,512 | |
| Mantua Interlocking #32 Crossover | | | | | |
| C.EN.101860.0002 TURN - MANTUA #32 X/O - ET SUPPORT | Units not applicable | 9/27/2021 | 11/5/2021 | \$1,976 | |
| C.EN.101860.0003 TURN - MANTUA #32 X/O - T&E SUPPORT | Units not applicable | 9/27/2021 | 11/5/2021 | \$4,772 | |
| C.EN.101860.0004 TURN - MANTUA #32 X/O - B&B SUPPORT | Units not applicable | 9/27/2021 | 11/5/2021 | \$3,980 | |
| C.EN.101860.0005 TURN - MANTUA #32 X/O - C&S SUPPORT | 2 EA Install Switch Machine | 9/27/2021 | 11/5/2021 | \$49,512 | |
| | | BCC Segment 16 | Programs Total | \$15,246,845 | |

BCC Segment 17: Girard to Philadelphia 30th St (Amtrak-owned)

Operators: Amtrak, NJT

| Investment Type | BCC Eligible | BCC Ineligible | Segment Total |
|-----------------|--------------|----------------|---------------|
| Programs | \$13,879,975 | \$0 | \$13,879,975 |
| Projects | \$1,072,400 | \$7,116,269 | \$8,188,669 |
| Total | \$14,952,375 | \$7,116,269 | \$22,068,644 |

Programs

| Investment Description and FY21 Scope | Units | Start Date | End Date | FY21 Budget |
|--|---|------------|-----------|-------------|
| BCC Eligible | | | | |
| PG00013 - Mid-Atlantic North Catenary - C.EN.101822 | | | | |
| See below for further detail on planned FY21 work. | | | | |
| North Penn 12 KV Switchs MP 1.23 AP Line | | | | |
| North Penn 12KV switches | 24 EA Install / Renew 12 KV Disconnect Switches | 10/1/2020 | 9/30/2021 | \$617,033 |
| PG00020 - Mid-Atlantic North Track - C.EN.101828 | | | | |
| Replace 40 insulated joints, 260 joint eliminations, 260,000 LF spot surfacing upgrades replacements, and 100 concrete tie replacements. The program will also complete a se Track forces whenever possible. | | | | |
| Concrete Tie Replacement MP 87.7 - 1.5 AP/AN Line | | | | |
| C.EN.101828.FY2123 TIES MADN CONCRETE AN/AP LN MP87.7-1.5 | 7 EA Install Ties, Concrete | 3/30/2021 | 6/11/2021 | \$31,889 |
| Insulated Joint Removal MP 87.7 - 1.5 AP/AN Line | | | | |
| C.EN.101828.FY2110 RAIL MADN INSULATE JT AP LINE MP87.7-1.5 | 5 EA Install Insulated Joint (Includes OTM) | 2/4/2021 | 3/5/2021 | \$51,008 |
| Interlocking Steel MP 87.7 - 1.5 AP/AN Line | | | | |
| C.EN.101828.FY2153 TURN MADN I/L STEEL AN LINE MP87.7-1.5 | 1 EA Renew Switch Point Stock Rail | 3/1/2021 | 3/8/2021 | \$18,663 |
| C.EN.101828.FY2158 TURN MADN I/L STEEL AP LN MP87.7-1.5 | Units not applicable | 6/1/2021 | 6/8/2021 | \$18,663 |
| Joint Elimination MP 87.7 - 1.5 AP/AN Line | | | | |
| C.EN.101828.0020 RAIL MADN JOINT ELIM AP LINE MP87.7-1.5 | 30 EA Field Weld and Grind Rail (Joint Elimination) | 3/19/2021 | 5/7/2021 | \$337,178 |
| Spot Surfacing MP 87.7 - 1.5 AP/AN Line | | | | |
| C.EN.101828.FY2147 GEOM AP LN MP 87.7-1.5 SPOT SURFACING | 20000 PF Surface Track, Spot | 10/1/2020 | 9/28/2021 | \$277,317 |
| Spot Undercutting MP 87.7 - 1.5 AP/AN Line | | | | |
| C.EN.101828.FY2168 BLST MAD SPOT UNDRCUT AP LN MP87.7-1.5 | 1000 FT Vacuum Train, Spot Undercut | 7/1/2021 | 7/9/2021 | \$331,377 |
| Wood Tie/Timber Replacement MP 87.7 - 1.5 AP/AN Line | | | | |
| C.EN.101828.0033 TIES MAD TIE/TIMBER AN/AP LN MP87.7-1.5 | 80 EA Install Ties and Timbers | 3/1/2021 | 3/23/2021 | \$92,076 |
| PG00060 - Production High Speed Surfacing - C.EN.101855 | | | | |
| 300 Miles Surfaced by PROD HSS | | | | |
| High Speed Surfacing Production MP 82.1 -87.7 AN Line | | | | |
| C.EN.101855.0037 GEOM AN LN MP 82.1 - 87.7 HSS PRODUCTION - 16 | Units not applicable | 10/1/2020 | 9/30/2021 | \$712,911 |
| High Speed Surfacing Production MP 87.7 - 1.4 AN/AP Line | | | | |
| C.EN.101855.0039 GEOM AN/AP LN MP87.7-1.4 HSS PRODUCTION - 17 | Units not applicable | 10/1/2020 | 9/30/2021 | \$58,833 |

| Investment Description and FY21 Scope | Units | Start Date | End Date | FY21 Budget |
|---|-----------------------------------|----------------------|----------------|--------------|
| PG00061 - Total Track Renewal - C.EN.101871 | | | | |
| 3,320 track feet , 30th St Track 8 and Track 10 | | | | |
| 30th Street Station Block Tie Replacement Track 10 | | | | |
| XXX10 TKRN AMTRAK SYSTEM - 30TH ST STATION TK 10 | Units not applicable | 5/3/2021 | 9/14/2021 | \$4,721,661 |
| 30th Street Station Block Tie Replacement Track 8 | | | | |
| XXX8 TKRN AMTRAK SYSTEM - 30TH ST STATION TK 8 | Units not applicable | 2/1/2021 | 6/14/2021 | \$4,759,949 |
| PG00065 - Turnout Renewal - C.EN.101860 | | | | |
| See below for further detail on planned FY21 work. | | | | |
| Mantua Interlocking #23 Crossover | | | | |
| C.EN.101860.0001 TURN - MANTUA #23 X/O - INSTALL | 2 EA Install Wood Turnout | 9/27/2021 | 9/24/2021 | \$436,857 |
| Mantua Interlocking #32 Crossover | | | | |
| C.EN.101860.0001 TURN - MANTUA #32 X/O - INSTALL | 2 EA Install Wood Turnout | 9/27/2021 | 9/24/2021 | \$436,857 |
| PG00071 - Production Wood Tie/Timber Replacement - C.EN.101858 | | | | |
| See below for further detail on planned FY21 work. | | | | |
| Mantua Interlocking Timber Replacement | | | | |
| C.EN.101858.2021.19 TIE/TIMBER REPLACEMENT - MANTUA IL | 487 EA Install Ties and Timbers | 1/4/2021 | 4/22/2021 | \$863,629 |
| PG00085 - Amtrak Owned Positive Train CTRL (PTC) Installation - C.EN.201034 | | | | |
| FY21 Scope includes completing all boundary locations, OBC Upgrates, completion | n of STS Migration and TP upgrade | es, ACSES Monitoring | Tool Phase 2 | |
| Zoo to Girard to Kay Mid-Atlantic Division PTC Boundary Upgrade | | | | |
| C.EN.201034.0104 PTC MAD ZOO/GIRARD/KAY-BOUNDARY UPG | Units not applicable | 10/1/2020 | 10/28/2020 | \$114,072 |
| | | BCC Segment 17 | Programs Total | \$13,879,975 |

Projects

| Investment Description and FY21 Scope | Start Date | End Date | FY21 Budget |
|---|---------------------------|-----------------------|--------------|
| BCC Eligible | | | |
| P000091 - 30th Street Station Facade Restoration - C.EN.100039 | | | |
| Reconstruction of the north parapet wall including the protection of the existing signal room on the north side of the repairs on the north side of the building. | ne building and miscellan | eous limestone and bi | rick masonry |
| C.EN.100039.0005 STA PHIL 30TH ST-FAÇADE CONTRACTOR | 9/1/2021 | 1/18/2023 | \$1,072,400 |
| BCC Ineligible | | | |
| P000161 - PCY Acela 21 Shop - C.EN.101893 | | | |
| Completion of general site analysis, NEPA evaluation and design-build bridging documents. Development and awa | ard of 3rd party design-b | uild contractor. | |
| C.EN.101893.0001 MOFE PCY NEW S&I TRAINSET FAC-PRELIM DSN | 7/1/2020 | 11/2/2020 | \$158,841 |
| C.EN.101893.0005 MOFE PCY NEW S&I TRAINSET FAC-RWP | 7/1/2020 | 11/2/2020 | \$19,203 |
| C.EN.101893.0007 MOFE PCY NEW S&I TRAINSET FAC-PROJ. MGT. | 5/1/2020 | 9/1/2020 | \$40,248 |
| MOFE PENN COACH YARD NEW S&I ACELA 21 TRAINSET FACILITY | 10/1/2020 | 10/25/2023 | \$6,897,977 |
| | BCC Segment | 17 Projects Total | \$8,188,669 |

BCC Segment 18: Philadelphia 30th St to Arsenal (Amtrak-owned)

Operators: Amtrak

 Investment Type
 BCC Eligible
 BCC Ineligible
 Segment Total


 Programs
 \$2,919,721
 \$0
 \$2,919,721

 Projects
 \$0
 \$0
 \$0

 Total
 \$2,919,721
 \$0
 \$2,919,721

Programs

| Investment Description and FY21 Scope | Units | Start Date | End Date | FY21 Budget |
|--|---|---------------------------------------|------------------|-------------|
| BCC Eligible | | | | |
| PG00019 - Mid-Atlantic North Substations - C.EN.101827 | | | | |
| See below for further detail on planned FY21 work. | | | | |
| Arsenal Sub 2A Signal Power Station Frequency Converter AH Line | | | | |
| Arsenal Sub 2A - Signal Power Static Frequency Converter | 1 EA Install / Renew Frequency Converter | 10/1/2020 | 9/30/2021 | \$898,435 |
| PG00020 - Mid-Atlantic North Track - C.EN.101828 | | | | |
| Replace 40 insulated joints, 260 joint eliminations, 260,000 LF spot surfacing upgrade replacements, and 100 concrete tie replacements. The program will also complete a Track forces whenever possible. | | | | |
| Concrete Tie Replacement MP 1.4 - 2.7 AP Line | | | | |
| C.EN.101828.FY2124 TIES MADN CONCRETE AP LINE MP1.4-2.7 | 9 EA Install Ties, Concrete | 10/1/2020 | 12/17/2020 | \$34,341 |
| High Speed Surfacing MP 1.4 - 2.7 AP Line | | | | |
| C.EN.101828.FY2185 GEOM MADN HSS SURFAC AP LN MP1.4 - 2.7 | 2000 PF Surface Track, High Speed | 11/2/2020 | 8/30/2021 | \$22,439 |
| Insulated Joint Removal MP 1.4 - 2.7 AP Line | | | | |
| C.EN.101828.FY2106 RAIL MADN INSULATE JT AP LINE MP1.4-2.7 | 6 EA Install Insulated Joint (Includes OTM) | 10/1/2020 | 10/30/2020 | \$61,208 |
| Interlocking Steel MP 1.4 - 2.7 AP Line | | | | |
| C.EN.101828.FY2154 TURN MADN I/L STEEL AP LN MP1.4-2.7 | 1 EA Renew Switch Point Stock Rail | 4/1/2021 | 4/8/2021 | \$18,663 |
| Joint Elimination MP 1.4 - 2.7 AP Line | | | | |
| C.EN.101828.0016 RAIL MADN JOINT ELIM AP LINE MP1.4-2.7 | 20 EA Field Weld and Grind Rail (Joint Elimination) | 10/1/2020 | 11/13/2020 | \$224,786 |
| Spot Surfacing MP 1.4 - 2.7 AP Line | | | | |
| C.EN.101828.FY2143 GEOM AP LN MP 1.4 - 2.7 SPOT SURFACING | 50000 PF Surface Track, Spot | 10/1/2020 | 9/28/2021 | \$693,291 |
| Spot Undercutting MP 1.4 - 2.7 AP Line | | | | |
| C.EN.101828.FY2164 BLST MAD SPOT UNDRCUT AP LN MP1.4-2.7 | 2500 FT Vacuum Train, Spot Undercut | 3/1/2021 | 3/8/2021 | \$828,442 |
| Wood Tie/Timber Replacement MP 1.4 - 2.7 AP Line | | | | |
| C.EN.101828.0034 TIES MAD TIE/TIMBER AP LINE MP1.4-2.7 | 120 EA Install Ties and Timbers | 4/1/2021 | 4/28/2021 | \$138,115 |
| | | BCC Segment 18 | 3 Programs Total | \$2,919,721 |
| | | · · · · · · · · · · · · · · · · · · · | | |



BCC Segment 19: Arsenal to Marcus Hook (Amtrak-owned)

Operators: Amtrak, SEPTA

Programs

| Investment Type | BCC Eligible | BCC Ineligible | Segment Total |
|-----------------|--------------|----------------|---------------|
| Programs | \$11,386,073 | \$3,234,664 | \$14,620,737 |
| Projects | \$0 | \$0 | \$0 |
| Total | \$11,386,073 | \$3,234,664 | \$14,620,737 |


| Investment Description and FY21 Scope | Units | Start Date | End Date | FY21 Budge |
|---|---------------------------------------|------------|-----------|------------|
| BCC Eligible | | | | |
| PG00013 - Mid-Atlantic North Catenary - C.EN.101822 | | | | |
| See below for further detail on planned FY21 work. | | | | |
| Baldwin Interlocking to Bell Interlocking Catenary SAP Install AP Line | | | | |
| Baldwin I/L to Bell I/L Catenary SAP Install | 400 EA Install / Renew SAP Assemblies | 10/1/2020 | 9/30/2021 | \$903,90 |
| PG00017 - Mid-Atlantic North Signals - C.EN.101825 | | | | |
| See below for further detail on planned FY21 work. | | | | |
| Relay Replacement MP 6.4 - MP 17.1 AP Line | | | | |
| INT MADN AP LN MP6.4/17.1-CODE RELAY RPL | Units not applicable | 10/1/2020 | 9/30/2021 | \$301,07 |
| PG00018 - Mid-Atlantic North Structures - C.EN.101826 | | | | |
| See below for further detail on planned FY21 work. | | | | |
| Barklay Street Track 1 Bridge Timber Replacement MP 13.79 AP Line | | | | |
| BGTI BARKLAY ST-BRG TIMB TK1 PA013.79 | Units not applicable | 10/1/2020 | 9/30/2021 | \$428,95 |
| Concord Ave Track 1 Bridge Timber Replacement MP 13.83 AP Line | | | | |
| BGTI CONCORD AVE-BRG TIMB TK1 PA013.83 | Units not applicable | 10/1/2020 | 9/30/2021 | \$428,95 |
| Glenolden Ave Undergrade Bridge Rehab MP 8.32 AP Line | | | | |
| BGUG AP LN MP08.32 GLENOLDEN AVE GLENOLDEN PA REHAB | 1 EA Undergrade Bridge Upgrade | 10/1/2020 | 9/30/2021 | \$241,29 |
| Welsh St Track 3 Bridge Timber Replacement MP 13.42 AP Line | | | | |
| BGTI WELSH ST-BRG TIMB RPL TK 3 PA013.42 | Units not applicable | 10/1/2020 | 9/30/2021 | \$428,95 |
| PG00019 - Mid-Atlantic North Substations - C.EN.101827 | | | | |
| See below for further detail on planned FY21 work. | | | | |
| Glenolden Sub 10 110 Air Break Replacement AH Line | | | | |
| Glenolden Sub 10 110 Air Break Replacement | Units not applicable | 10/1/2020 | 9/30/2021 | \$201,69 |
| Lamokin Sub 11 Air Break Replacement AH Line | | | | |
| Lamokin Sub 11 - Air Break Replacement | Units not applicable | 10/1/2020 | 9/30/2021 | \$201,69 |
| PG00020 - Mid-Atlantic North Track - C.EN.101828 | | | | |
| Replace 40 insulated joints, 260 joint eliminations, 260,000 LF spot surfacing upgrad replacements, and 100 concrete tie replacements. The program will also complete a Track forces whenever possible. | | | | |
| Concrete Tie Replacement MP 2.7 - 6.4 AP Line | | | | |
| C.EN.101828.FY2125 TIES MADN CONCRETE AP LINE MP2.7-6.4 | 13 EA Install Ties, Concrete | 12/15/2020 | 3/3/2021 | \$39,24 |
| Concrete Tie Replacement MP 6.4 - 17.1 AP Line | | | | |
| C.EN.101828.FY2126 TIES MADN CONCRETE AP LINE MP6.4-17.1 | 9 EA Install Ties, Concrete | 3/1/2021 | 5/12/2021 | \$34,34 |
| High Speed Surfacing MP 2.7 - 6.4 AP Line | | | | |

| Investment Description and FY21 Scope | Units | Start Date | End Date | FY21 Budget |
|---|---|------------|------------|-------------|
| C.EN.101828.FY2186 GEOM MADN HSS SURFAC AP LN MP2.7 - 6.4 | 7500 PF Surface Track, High Speed | 11/2/2020 | 8/30/2021 | \$84,151 |
| Hook to Baldwin Drainage Improvements AP Line | | | | |
| C.EN.101828.FY2178 DRAN BALDWIN TO HOOK DRAINAGE IMPROVEMENTS | Units not applicable | 11/27/2020 | 12/17/2020 | \$91,099 |
| Insulated Joint Removal MP 2.7 - 6.4 AP Line | | | | |
| C.EN.101828.FY2107 RAIL MADN INSULATE JT AP LINE MP2.7-6.4 | 2 EA Install Insulated Joint (Includes OTM) | 11/2/2020 | 12/2/2020 | \$20,402 |
| Insulated Joint Removal MP 6.4 - 17.1 AP Line | | | | |
| C.EN.101828.FY2108 RAIL MADN INSULATE JT AP LINE MP6.4-17.1 | 5 EA Install Insulated Joint (Includes OTM) | 12/3/2020 | 1/4/2021 | \$51,007 |
| Interlocking Steel MP 2.7 - 6.4 AP Line | | | | |
| C.EN.101828.FY2155 TURN MADN I/L STEEL AP LN MP2.7-6.4 | 1 EA Renew Switch Point Stock Rail | 3/1/2021 | 3/8/2021 | \$18,663 |
| Interlocking Steel MP 6.4 - 17.1 AP Line | | | | |
| C.EN.101828.FY2156 TURN MADN I/L STEEL AP LN MP6.4-17.1 | 1 EA Renew Switch Point Stock Rail | 4/1/2021 | 4/8/2021 | \$18,663 |
| Joint Elimination MP 2.7 - 6.4 AP Line | | | | |
| C.EN.101828.0017 RAIL MADN JOINT ELIM AP LINE MP2.7-6.4 | 10 EA Field Weld and Grind Rail (Joint Elimination) | 11/13/2020 | 12/8/2020 | \$112,393 |
| Joint Elimination MP 6.4 - 17.1 AP Line | | | | |
| C.EN.101828.0018 RAIL MADN JOINT ELIM AP LINE MP6.4-17.1 | 40 EA Field Weld and Grind Rail (Joint Elimination) | 12/8/2020 | 2/11/2021 | \$449,572 |
| Spot Surfacing MP 2.7 - 6.4 AP Line | | | | |
| C.EN.101828.FY2144 GEOM AP LN MP 2.7 - 6.4 SPOT SURFACING | 80000 PF Surface Track, Spot | 10/1/2020 | 9/28/2021 | \$1,109,271 |
| Spot Surfacing MP 6.4 - 17.1 AP Line | | | | |
| C.EN.101828.FY2145 GEOM AP LN MP 6.4 - 17.1 SPOT SURFACING | 20000 PF Surface Track, Spot | 10/1/2020 | 9/28/2021 | \$277,317 |
| Spot Undercutting MP 2.7 - 6.4 AP Line | | | | |
| C.EN.101828.FY2165 BLST MAD SPOT UNDRCUT AP LN MP2.7-6.4 | 4000 FT Vacuum Train, Spot Undercut | 4/1/2021 | 4/8/2021 | \$1,325,507 |
| Spot Undercutting MP 6.4 - 17.1 AP Line | | | | |
| C.EN.101828.FY2166 BLST MAD SPOT UNDRCUT AP LN MP6.4-17.1 | 2000 FT Vacuum Train, Spot Undercut | 5/3/2021 | 5/10/2021 | \$662,753 |
| Wood Tie/Timber Replacement MP 2.7 - 6.4 AP Line | | | | |
| C.EN.101828.0035 TIES MAD TIE/TIMBER AP LINE MP2.7-6.4 | 300 EA Install Ties and Timbers | 5/3/2021 | 5/25/2021 | \$345,287 |
| Wood Tie/Timber Replacement MP 6.4 - 17.1 AP Line | | | | |
| C.EN.101828.0036 TIES MAD TIE/TIMBER AP LINE MP6.4-17.1 | 120 EA Install Ties and Timbers | 6/1/2021 | 6/28/2021 | \$138,115 |
| PG00065 - Turnout Renewal - C.EN.101860 | | | | |
| See below for further detail on planned FY21 work. | | | | |
| Hook Interlocking #23 Crossover | | | | |
| Hook X/O 23 Install | Units not applicable | 10/2/2020 | 10/5/2020 | \$715,779 |

| nvestment Description and FY21 Scope | Units | Start Date | End Date | FY21 Budget |
|--|----------------------------------|------------|------------|-------------|
| Concrete Tie Replacement MP 2.7 - 6.4 AP Line | | | | |
| C.EN.101860.0100 TURN HOOK I/L #32 X/O - INSTALL | 2 EA Install Wood Turnout | 9/14/2020 | 10/29/2020 | \$494,613 |
| C.EN.101860.0101 TURN HOOK I/L #32 X/O - E.T. SUPPORT | Units not applicable | 9/14/2020 | 10/29/2020 | \$8,897 |
| C.EN.101860.0102 TURN HOOK I/L #32 X/O - T&E SUPPORT | Units not applicable | 9/14/2020 | 10/29/2020 | \$20,098 |
| C.EN.101860.0103 TURN HOOK I/L #32 X/O - B&B SUPPORT | Units not applicable | 9/14/2020 | 10/29/2020 | \$17,882 |
| C.EN.101860.0104 TURN HOOK I/L #32 X/O - C&S SUPPORT | Units not applicable | 9/14/2020 | 10/29/2020 | \$30,940 |
| G00088-Ride Quality Improvements between Hook and Baldwin-C.EN.1019 | 02 | | | |
| In FY'21, we aim to address 4-6 bridges (8-12 approaches) on Track 4 between F will determine our final count of bridges completed in the fiscal year. This will be | | | | |
| Ride Quality Improvements between Hook and Baldwin | | | | |
| LOC #1 | 700 EA Install Ties, Concrete | 1/4/2021 | 1/7/2021 | \$212,993 |
| LOC #1 | Units not applicable | 2/8/2021 | 2/11/2021 | \$212,99 |
| LOC #2 | Units not applicable | 1/11/2021 | 2/18/2021 | \$425,98 |
| LOC #3 | Units not applicable | 1/18/2021 | 2/25/2021 | \$425,98 |
| LOC #4 | Units not applicable | 1/25/2021 | 3/4/2021 | \$425,98 |
| LOC #5 | Units not applicable | 2/1/2021 | 3/11/2021 | \$425,98 |
| PCS | Units not applicable | 10/1/2020 | 6/30/2021 | \$26,81 |
| PM | Units not applicable | 10/1/2020 | 6/30/2021 | \$26,81 |
| CC Ineligible | | | | |
| G00065 - Turnout Renewal - C.EN.101860 | | | | |
| See below for further detail on planned FY21 work. | | | | |
| Hook Interlocking #89 Crossover | | | | |
| C.EN.101860.0031 TURN - HOOK #89 X/O - INSTALL | 2 EA Install Wood Turnout | 10/1/2020 | 10/9/2020 | \$1,297,839 |
| C.EN.101860.0032 TURN - HOOK #89 X/O - ET SUPPORT | Units not applicable | 10/1/2020 | 10/6/2020 | \$14,82 |
| C.EN.101860.0033 TURN - HOOK #89 X/O - T&E SUPPORT | Units not applicable | 10/1/2020 | 10/8/2020 | \$35,790 |
| C.EN.101860.0034 TURN - HOOK #89 X/O - B&B SUPPORT | Units not applicable | 10/1/2020 | 10/9/2020 | \$29,850 |
| C.EN.101860.0035 TURN - HOOK #89 X/O - C&S SUPPORT | 1 EA Install Switch Machine | 10/1/2020 | 10/28/2020 | \$199,15 |
| Hook Interlocking #91 Crossover | | | | |
| C.EN.101860.0026 TURN HOOK I/L #91 X/O - INSTALL | 2 EA Install Wood Turnout | 10/1/2020 | 10/19/2020 | \$1,212,183 |
| C.EN.101860.0027 TURN HOOK I/L #91 X/O - E.T. SUPPORT | Units not applicable | 10/2/2020 | 10/12/2020 | \$14,90 |
| C.EN.101860.0028 TURN HOOK I/L #91 X/O - T&E SUPPORT | Units not applicable | 10/2/2020 | 10/12/2020 | \$33,66 |
| C.EN.101860.0029 TURN HOOK I/L #91 X/O - B&B SUPPORT | Units not applicable | 10/2/2020 | 10/12/2020 | \$29,95 |
| C.EN.101860.0030 TURN HOOK I/L #91 X/O - C&S SUPPORT | 2 EA Install Switch Machine | 10/2/2020 | 10/12/2020 | \$366,517 |

BCC Segment 19 Programs Total

\$14,620,737



BCC Segment 20: Marcus Hook to Bacon (Amtrak-owned)

Operators: Amtrak, SEPTA (on behalf of DelDOT)

| Investment Type | BCC Eligible | BCC Ineligible | Segment Total |
|-----------------|--------------|----------------|---------------|
| Programs | \$37,541,779 | \$587,402 | \$38,129,181 |
| Projects | \$1,351,207 | \$859,818 | \$2,211,025 |
| Total | \$38,892,986 | \$1,447,220 | \$40,340,206 |

Programs

| Investment Description and FY21 Scope | Units | Start Date | End Date | FY21 Budget |
|---|---|-------------------------------------|-----------------------|----------------|
| BCC Eligible | | | | |
| PG00017 - Mid-Atlantic North Signals - C.EN.101825 | | | | |
| See below for further detail on planned FY21 work. | | | | |
| Relay Replacement MP 17.1 - MP 29.6 AP Line | | | | |
| INT MADN AP LN MP17.1/29.6-CODE RLAY RPL | Units not applicable | 10/1/2020 | 9/30/2021 | \$301,078 |
| PG00018 - Mid-Atlantic North Structures - C.EN.101826 | | | | |
| See below for further detail on planned FY21 work. | | | | |
| Justison Street Undergrade Bridge Rehab MP 27.21 AP Line | | | | |
| BGUG AP LN MP27.21 JUSTISON ST WILM DE REHAB | 1 EA Undergrade Bridge Upgrade | 10/1/2020 | 9/30/2021 | \$214,484 |
| Lombard Street Undergrade Bridge Rehab MP 26.60 AP Line | | | | |
| BGUG AP LN MP 26.60 LOMBARD ST WILM DE REHAB | 1 EA Undergrade Bridge Upgrade | 10/1/2020 | 9/30/2021 | \$214,484 |
| Market Street Undergrade Bridge Rehab MP 26.92 AP Line | | | | |
| BGUG AP LN MP26.92 MARKET ST WILM DE REHAB | 1 EA Undergrade Bridge Upgrade | 10/1/2020 | 9/30/2021 | \$160,860 |
| PG00020 - Mid-Atlantic North Track - C.EN.101828 | | | | |
| Replace 40 insulated joints, 260 joint eliminations, 260,000 LF spot surfacing upgrad replacements, and 100 concrete tie replacements. The program will also complete a Track forces whenever possible. Concrete Tie Replacement MP 17.1 - 29.6 AP Line C.EN.101828.FY2127 TIES MADN CONCRETE AP LINE MP17.1-29.6 | a series of drainage improvements a | across Mid-Atlantic So 5/10/2021 | uth (MADS) division u | tilizing MAD's |
| | Concrete | 0, 10, 202 1 | 772072021 | φοση, το |
| High Speed Surfacing MP 17.1 - 29.6 AP Line | | | | |
| C.EN.101828.FY2187 GEOM MADN HSS SURFAC AP LN MP17.1 - 29.6 | 20000 PF Surface Track, High Speed | 11/2/2020 | 8/30/2021 | \$224,404 |
| Insulated Joint Removal MP 17.1 - 29.6 AP Line | | | | |
| C.EN.101828.FY2109 RAIL MADN INSULATE JT AP LINE MP17.1-29.6 | 2 EA Install Insulated Joint (Includes OTM) | 1/5/2021 | 2/3/2021 | \$20,402 |
| Interlocking Steel MP 17.1 - 29.6 AP Line | | | | |
| C.EN.101828.FY2157 TURN MADN I/L STEEL AP LN MP17.1-29.6 | 1 EA Renew Switch Point Stock Rail | 5/3/2021 | 5/10/2021 | \$18,663 |
| Joint Elimination MP 17.1 - 29.6 AP Line | | | | |
| C.EN.101828.0019 RAIL MADN JOINT ELIM AP LINE MP17.1-29.6 | 20 EA Field Weld and Grind Rail (Joint Elimination) | 2/11/2021 | 3/19/2021 | \$224,786 |
| Spot Surfacing MP 17.1 - 29.6 AP Line | | | | |
| C.EN.101828.FY2146 GEOM AP LN MP17.1 - 29.6 SPOT SURFACING | 100000 PF Surface Track, Spot | 10/1/2020 | 9/28/2021 | \$1,386,590 |
| | | | | |

| nvestment Description and FY21 Scope | Units | Start Date | End Date | FY21 Budge |
|--|--|------------|-----------|--|
| C.EN.101828.FY2167 BLST MAD SPOT UNDRCUT AP LN MP17.1-29.6 | 5000 FT Vacuum Train, Spot Undercut | 6/1/2021 | 6/8/2021 | \$1,656,88 |
| Wood Tie/Timber Replacement MP 17.1 - 29.6 AP Line | | | | |
| C.EN.101828.0037 TIES MAD TIE/TIMBER AP LINE MP17.1-29.6 | 220 EA Install Ties and Timbers | 7/1/2021 | 8/5/2021 | \$253,21 |
| PG00026 - Mid-Atlantic South Structures - C.EN.101833 | | | | |
| Upgrades to: 4 culverts, 2 tunnels, 5 retaining walls, 5 signal bridges, 5 undergrade b | ridges, and 3 movable bridges | | | |
| Brick Wall Arch Upgrade MP 50.90 AP Line | | | | |
| C.EN.101833.2021.14 WALL BRICK ARCH UPGRADE AT MP 50.90 | Units not applicable | 10/1/2020 | 9/30/2021 | \$160,86 |
| Culvert Upgrade MP 33.13 AP Line | | | | |
| C.EN.101833.2021.04 CULV MD 33.12 - CULVERT UPGRADE | Units not applicable | 10/1/2020 | 9/30/2021 | \$268,10 |
| Iron Signal Bridge Upgrade AP Line | | | | |
| C.EN.101833.2021.21 BGSG SIGNAL BRIDGE - IRON SBHS | 1 EA Signal Bridge Component Upgrades | 10/1/2020 | 9/30/2021 | \$331,76 |
| Stone Wall Arch Upgrade MP 36.40 AP Line | | | | |
| C.EN.101833.2021.13 WALL STONE ARCH UPGRADE AT MP 36.40 | Units not applicable | 10/1/2020 | 9/30/2021 | \$214,48 |
| PG00027 - Mid-Atlantic South Substations - C.EN.101834 | | | | |
| Tie switch replacement at 2 substations, and breaker replacement at Sub 15 | | | | |
| Bacon Hill Sub 15 352 Break Replacement AP Line | | | | |
| Bacon Hill Sub 15 352 Breaker replacement | Units not applicable | 10/1/2020 | 9/30/2021 | \$77,2 |
| Landover Sub 24 Tie Switch Replacement AP Line | | | | |
| Landover Sub 24 Tie Switch Replacement | Units not applicable | 10/1/2020 | 9/30/2021 | \$213,9° |
| PG00028 - Mid-Atlantic South Track - C.EN.101835 | | | | |
| Replace 40 insulated joints, 260 joint eliminations, 260000 LF spot surfacing upgrade replacements, & 100 concrete tie replacements along with associated drainage impro | | | | |
| Concrete Tie Replacement MP 29.6 - 41.4 AP Line | | | | |
| C.EN.101835.0033 TIES MADS CONCRETE AP LINE MP29.6-41.4 | 11 EA Install Ties, Concrete | 11/10/2020 | 1/28/2021 | \$36,79 |
| Concrete Tie Replacement MP 41.4 - 51.0 AP Line | | | | |
| C.EN.101835.0034 TIES MADS CONCRETE AP LINE MP41.4-51.0 | 11 EA Install Ties, Concrete | 12/7/2020 | 2/23/2021 | \$36,79 |
| Drainage Improvements MP 29.6 - 41.4 AP Line | | | | |
| | | | | |
| C.EN.101835.0024 DRAN MADS AP LN MP29.6/41.4-DRAN IMPV | Units not applicable | 10/1/2020 | 9/29/2021 | \$818,7 |
| C.EN.101835.0024 DRAN MADS AP LN MP29.6/41.4-DRAN IMPV Drainage Improvements MP 41.4 - 51.0 AP Line | Units not applicable | 10/1/2020 | 9/29/2021 | \$818,75 |
| | Units not applicable Units not applicable | 10/1/2020 | 9/29/2021 | |
| Drainage Improvements MP 41.4 - 51.0 AP Line | | | | |
| Drainage Improvements MP 41.4 - 51.0 AP Line C.EN.101835.0025 DRAN MADS AP LN MP41.4/51.0-DRAN IMPV | | | | \$116,96 |
| Drainage Improvements MP 41.4 - 51.0 AP Line C.EN.101835.0025 DRAN MADS AP LN MP41.4/51.0-DRAN IMPV High Speed Surfacing MP 29.6 - 41.4 AP Line | Units not applicable 3000 PF Surface | 10/1/2020 | 9/29/2021 | \$116,96 |
| Drainage Improvements MP 41.4 - 51.0 AP Line C.EN.101835.0025 DRAN MADS AP LN MP41.4/51.0-DRAN IMPV High Speed Surfacing MP 29.6 - 41.4 AP Line C.EN.101835.0104 GEOM MADS HSS SURFACE AP LN MP29.6-41.4 | Units not applicable 3000 PF Surface | 10/1/2020 | 9/29/2021 | \$116,90 \$33,61 |
| Drainage Improvements MP 41.4 - 51.0 AP Line C.EN.101835.0025 DRAN MADS AP LN MP41.4/51.0-DRAN IMPV High Speed Surfacing MP 29.6 - 41.4 AP Line C.EN.101835.0104 GEOM MADS HSS SURFACE AP LN MP29.6-41.4 High Speed Surfacing MP 41.4 - 51.0 AP Line | Units not applicable 3000 PF Surface Track, Spot 3000 PF Surface | 10/1/2020 | 9/29/2021 | \$818,75 \$116,96 \$33,69 \$33,69 |


| nvestment Description and FY21 Scope | Units | Start Date | End Date | FY21 Budget |
|---|--|------------|------------|--------------|
| C.EN.101835.0002 RAIL MADS INSULATED JT AP LN MP41.4-51.0 | 5 EA Install Insulated Joint (Includes OTM) | 11/2/2020 | 12/2/2020 | \$51,007 |
| Interlocking Steel MP 29.6 - 41.4 AP Line | | | | |
| C.EN.101835.0060 TURN MADS I/L STEEL AP LN MP29.6-41.4 | 6 EA Renew Frog | 10/1/2020 | 10/13/2020 | \$111,976 |
| Interlocking Steel MP 41.4 - 51.0 AP Line | | | | |
| C.EN.101835.0061 TURN MADS I/L STEEL AP LN MP41.4-51.0 | 6 EA Renew Frog | 10/20/2020 | 10/30/2020 | \$111,976 |
| Joint Elimination MP 29.6 - 41.4 AP Line | | | | |
| C.EN.101835.0012 RAIL MADS JOINT ELIM AP LINE MP29.6-41.4 | 37 EA Field Weld and Grind Rail (Joint Elimination) | 10/1/2020 | 1/26/2021 | \$415,852 |
| Joint Elimination MP 41.4 - 51.0 AP Line | | | | |
| C.EN.101835.0013 RAIL MADS JOINT ELIM AP LINE MP41.4-51.0 | 37 EA Field Weld and Grind Rail (Joint Elimination) | 10/20/2020 | 2/12/2021 | \$415,854 |
| Spot Surfacing MP 29.6 - 41.4 AP Line | | | | |
| C.EN.101835.0070 GEOM MADS SPOT SURF AP LN MP29.6-41.4 | 50000 PF Surface Track, Spot | 10/1/2020 | 9/29/2021 | \$693,294 |
| Spot Surfacing MP 41.4 - 51.0 AP Line | | | | |
| C.EN.101835.0071 GEOM MADS SPOT SURF AP LN MP41.4-51.0 | 20000 PF Surface Track, Spot | 10/1/2020 | 9/29/2021 | \$277,310 |
| Spot Undercutting MP 29.6 - 41.4 AP Line | | | | |
| C.EN.101835.0077 BLST MADS SPOT UNDRCUT AP LN MP29.6-41.4 | 1000 FT Vacuum Train, Spot Undercut | 11/10/2020 | 11/19/2020 | \$339,58 |
| Spot Undercutting MP 41.4 - 51.0 AP Line | | | | |
| C.EN.101835.0078 BLST MADS SPOT UNDRCUT AP LN MP41.4-51.0 | 1000 FT Vacuum Train, Spot Undercut | 10/1/2020 | 10/8/2020 | \$351,913 |
| Wood Tie/Timber Replacement MP 29.6 - 41.4 AP Line | | | | |
| C.EN.101835.0049 TIES MADS TIE/TIMBER AP MP29.6-41.4 | 150 EA Install Ties and Timbers | 11/2/2020 | 12/1/2020 | \$172,64 |
| Wood Tie/Timber Replacement MP 41.4 - 51.0 AP Line | | | | |
| C.EN.101835.0050 TIES MADS TIE/TIMBER AP LN MP41.4-51.0 | 50 EA Install Ties and Timbers | 12/3/2020 | 12/23/2020 | \$57,548 |
| G00057 - TLS Concrete Tie Replacement - C.EN.101652 | | | | |
| 80,134 Concrete Ties; 320,534 FT CWR | | | | |
| Ragan to Bacon Track 3 TLS MP 30.01 - 50.71 AP Line | | | | |
| 201652.RB172 TLS RAGAN TO BACON TK 3 - INSTALL | 58534 EA Install Ties, Concrete / 232320 FT Install Rail, CWR (Includes OTM) | 5/3/2021 | 10/28/2021 | \$21,116,683 |
| 201652.RB173 TLS RAGAN TO BACON TK 3 - ET SUPPORT | Units not applicable | 5/3/2021 | 10/28/2021 | \$579,398 |
| 201652.RB174 TLS RAGAN TO BACON TK 3 - C&S SUPPORT | Units not applicable | 5/3/2021 | 10/28/2021 | \$1,689,910 |
| 201652.RB175 TLS RAGAN TO BACON TK 3 - B&B SUPPORT | Units not applicable | 5/3/2021 | 10/28/2021 | \$692,338 |
| 201652.RB176 TLS RAGAN TO BACON TK 3 - T&E SUPPORT | Units not applicable | 5/3/2021 | 10/28/2021 | \$565,933 |
| G00060 - Production High Speed Surfacing - C.EN.101855 | | | | |
| 300 Miles Surfaced by PROD HSS | | | | |
| High Speed Surfacing Production MP 29.6 41.4 AP Line | | | | |

| Investment Description and FY21 Scope | Units | Start Date | End Date | FY21 Budget |
|--|------------------------------|----------------|----------------|--------------|
| C.EN.101855.0049 GEOM AP LN MP 29.6 - 41.4 HSS PRODUCTION - 20 | Units not applicable | 10/1/2020 | 9/30/2021 | \$396,593 |
| High Speed Surfacing Production MP 41.4 - 51.0 AP Line | | | | |
| C.EN.101855.0051 GEOM AP LN MP 41.4 - 51.0 HSS PRODUCTION - 20 | Units not applicable | 10/1/2020 | 9/30/2021 | \$1,887,978 |
| PG00063 - Track Rehabilitation - C.EN.101859 | | | | |
| See below for further detail on planned FY21 work. | | | | |
| Wilmington Yard Track Rehabilitation | | | | |
| Amtrak FA - Labor | Units not applicable | 6/1/2021 | 6/30/2021 | \$123,708 |
| C.EN.101859.2021.41 TKRH WILMINGTON DE - WILMINGTON YARD | 1 EA Install Wood Turnout | 6/1/2021 | 6/30/2021 | \$2,020 |
| Install Switch | Units not applicable | 6/14/2021 | 6/25/2021 | \$195,408 |
| Remove Switch | Units not applicable | 6/1/2021 | 6/11/2021 | \$16,106 |
| Surfacing | Units not applicable | 6/28/2021 | 6/30/2021 | \$12,932 |
| PG00083 - Communications System Upgrades - C.EN.101857 | | | | |
| See below for further detail on planned FY21 work. | | | | |
| Communication House Replacement MP 34.3 AP Line | | | | |
| C.EN.101857.0011 INT MADS MP34.3 AP LN-COMM HOUSE REPLACE | Units not applicable | 2/1/2021 | 5/28/2021 | \$126,472 |
| BCC Ineligible | | | | |
| PG00015 - Mid-Atlantic North Facilities - C.EN.101824 | | | | |
| See below for further detail on planned FY21 work. | | | | |
| Lancaster MOFW C&S Shop Water Storage | | | | |
| 00098 FY21 MOFW LNC PA - C&S SHOP WATER STORAGE | Units not applicable | 10/27/2020 | 9/8/2021 | \$280,695 |
| Wilmington DE, MOFE Wilmington New Cover on Rubb Building | | | | |
| 00099 MOFE Wilmington New Cover on the existing Rubb Building | Units not applicable | 10/28/2020 | 9/7/2021 | \$306,706 |
| | | BCC Segment 20 | Programs Total | \$38,129,181 |

Projects

| Investment Description and FY21 Scope | Start Date | End Date | FY21 Budget |
|--|-----------------------|-----------|-------------|
| BCC Eligible | | | |
| P000003 - Brandy to Ragan Section Improvement - C.EN.201126 | | | |
| Complete the construction of the electrified 3rd track, test and tie into Ragan and Brandy Interlockings. | | | |
| Brandy to Ragan Section Improvement | 10/1/2020 | 9/30/2021 | \$536,204 |
| P000109 - Brill to Landlith OCS Improvements - C.EN.101880 | | | |
| Initiate preliminary design to be contracted out, advance the design to a conceptual design and prepare NEPA, en | vironmental & SHPO do | ocuments. | |
| Temp C.EN.101880 CAT BRILL/LANDLITH - CONSTRUCTION - ET | 8/2/2021 | 4/23/2027 | \$126,050 |
| Temp C.EN.101880 CAT BRILL/LANDLITH - CONSTRUCTION MANAGEMENT | 4/5/2021 | 7/30/2027 | \$47,479 |
| Temp C.EN.101880 CAT BRILL/LANDLITH - ROW/UTILITIES | 9/7/2021 | 1/28/2022 | \$48,746 |
| P000160 - Movable Point Frog Switch Machine Rod Replacement - C.EN.101894 | | | |
| The FY 21 scope is to complete the remaining 54 turnouts. | | | |
| C.EN.101894.0012 INT RAGAN I/L MP29.7-MPF HST ROD REPLACE | 7/2/2021 | 8/28/2021 | \$163,766 |

| Investment Description and FY21 Scope | Start Date | End Date | FY21 Budget |
|---|---------------|-------------------|-------------|
| P000168 - Gunpow Substation 18 New Prefabricated Control House - C.EN.101900 | | | |
| Procure and initiate design | | | |
| Brandy to Ragan Section Improvement | 10/1/2020 | 9/30/2021 | \$428,961 |
| BCC Ineligible | | | |
| P000119 - Wilmington Training Center Parking Access Improvements - C.EN.101879 | | | |
| Procure a design consultant and develop design up to 60% and initiate permitting. | | | |
| C.EN.101879.0001 ROAD WIL DE TRAINING FAC RD-CONCEPT DSN | 9/29/2020 | 11/30/2020 | \$20,496 |
| C.EN.101879.0002 ROAD WIL DE TRAINING FAC RD-STUDY/SURVEY | 9/29/2020 | 12/1/2020 | \$19,986 |
| C.EN.101879.0003 ROAD WIL DE TRAINING FAC RD-PRELIM DSN | 9/29/2020 | 2/1/2021 | \$46,811 |
| C.EN.101879.0004 ROAD WIL DE TRAINING FAC RD-ENVRN./NEPA | 9/28/2020 | 1/29/2021 | \$39,009 |
| C.EN.101879.0005 ROAD WIL DE TRAINING FAC RD-60% DESIGN | 10/27/2020 | 3/3/2021 | \$53,083 |
| C.EN.101879.0006 ROAD WIL DE TRAINING FAC RD-90% DESIGN | 2/2/2021 | 5/26/2021 | \$37,534 |
| C.EN.101879.0007 ROAD WIL DE TRAINING FAC RD-FINAL DESIGN | 4/1/2021 | 6/24/2021 | \$32,172 |
| C.EN.101879.0008 ROAD WIL DE TRAINING FAC RD-DSN REVIEW | 4/1/2021 | 7/22/2021 | \$34,853 |
| C.EN.101879.0009 ROAD WIL DE TRAINING FAC RD-UTILITIES | 3/4/2021 | 6/25/2021 | \$34,853 |
| C.EN.101879.0010 ROAD WIL DE TRAINING FAC RD-CONSTRUCTION | 6/25/2021 | 1/26/2022 | \$388,008 |
| C.EN.101879.0011 ROAD WIL DE TRAINING FAC RD-CNSTRCT MGT. | 11/30/2020 | 1/26/2022 | \$65,975 |
| C.EN.101879.0012 ROAD WIL DE TRAINING FAC RD-PROJ. MGT. | 4/1/2019 | 11/28/2022 | \$87,038 |
| | BCC Segment 2 | 20 Projects Total | \$2,211,025 |



BCC Segment 21: Bacon to Perryville (Amtrak-owned)

Operators: Amtrak

Programs

| Investment Type | BCC Eligible | BCC Ineligible | Segment Total |
|-----------------|--------------|----------------|---------------|
| Programs | \$3,959,131 | \$0 | \$3,959,131 |
| Projects | \$0 | \$0 | \$0 |
| Total | \$3,959,131 | \$0 | \$3,959,131 |

| Investment Description and FY21 Scope | Units | Start Date | End Date | FY21 Budget |
|---|---|------------|-----------|-------------|
| BCC Eligible | | | | |
| PG00026 - Mid-Atlantic South Structures - C.EN.101833 | | | | |
| Upgrades to: 4 culverts, 2 tunnels, 5 retaining walls, 5 signal bridges, 5 undergrade bridg | es, and 3 movable bridges | | | |
| Principio Creek Bridge Repair MP 56.9 AP Line | | | | |
| C.EN.101833.2021.17 BGUG PRINCIPIO CREEK - BRIDGE REPAIR (FY20 continuation) | 1 EA Undergrade Bridge Upgrade | 10/1/2020 | 9/30/2021 | \$1,580,944 |
| Stone Wall Box Upgrades MP 51.37 AP Line | | | | |
| C.EN.101833.2021.15 WALL STONE BOX UPGRADES AT MP 51.37 | Units not applicable | 10/1/2020 | 9/30/2021 | \$160,860 |
| PG00028 - Mid-Atlantic South Track - C.EN.101835 | | | | |
| Replace 40 insulated joints, 260 joint eliminations, 260000 LF spot surfacing upgrades, 3-replacements, & 100 concrete tie replacements along with associated drainage improven | | | | |
| Concrete Tie Replacement MP 51.0 - 59.4 AP Line | | | | |
| C.EN.101835.0035 TIES MADS CONCRETE AP LINE MP51.0-59.4 | 26 EA Install Ties, Concrete | 1/7/2021 | 3/24/2021 | \$55,201 |
| Drainage Improvements MP 51.0 - 59.4 AP Line | | | | |
| C.EN.101835.0026 DRAN MADS AP LN MP51.0/59.4-DRAN IMPV | Units not applicable | 10/1/2020 | 9/29/2021 | \$350,895 |
| High Speed Surfacing MP 51.0 - 59.4 AP Line | | | | |
| C.EN.101835.0106 GEOM MADS HSS SURFACE AP LN MP51.0-59.4 | 3000 PF Surface Track, Spot | 1/8/2021 | 1/11/2021 | \$33,698 |
| Insulated Joint Removal MP 51.0 - 59.4 AP Line | | | | |
| C.EN.101835.0003 RAIL MADS INSULATED JT AP LN MP51.0-59.4 | 5 EA Install Insulated Joint (Includes OTM) | 12/3/2020 | 1/4/2021 | \$51,007 |
| Interlocking Steel MP 51.0 - 59.4 AP Line | | | | |
| C.EN.101835.0062 TURN MADS I/L STEEL AP LN MP51.0-59.4 | 6 EA Renew Frog | 1/8/2021 | 1/20/2021 | \$111,976 |
| Joint Elimination MP 51.0 - 59.4 AP Line | | | | |
| C.EN.101835.0014 RAIL MADS JOINT ELIM AP LINE MP51.0-59.4 | 37 EA Field Weld and Grind Rail (Joint Elimination) | 11/6/2020 | 3/3/2021 | \$415,852 |
| Slope Stabilization MP 52.8 AP Line | | | | |
| EPRJ000707 AP-52.8 Slope Stabilization | Units not applicable | 10/1/2020 | 9/28/2022 | \$55,254 |
| Spot Surfacing MP 51.0 - 59.4 AP Line | | | | |
| C.EN.101835.0072 GEOM MADS SPOT SURF AP LN MP51.0-59.4 | 60000 PF Surface Track, Spot | 10/1/2020 | 9/29/2021 | \$831,953 |
| Wood Tie/Timber Replacement MP 51.0 - 59.4 AP Line | | | | |
| C.EN.101835.0051 TIES MADS TIE/TIMBER AP LN MP51.0-59.4 | 50 EA Install Ties and Timbers | 1/5/2021 | 1/26/2021 | \$57,548 |

| Investment Description and FY21 Scope | Units | Start Date | End Date | FY21 Budget |
|--|----------------------|----------------|----------------|-------------|
| PG00060 - Production High Speed Surfacing - C.EN.101855 | | | | |
| 300 Miles Surfaced by PROD HSS | | | | |
| High Speed Surfacing Production MP 51.0 - 59.4 AP Line | | | | |
| C.EN.101855.0053 GEOM AP LN MP 51.0 - 59.4 HSS PRODUCTION - 21 | Units not applicable | 10/1/2020 | 9/30/2021 | \$253,944 |
| | | BCC Segment 21 | Programs Total | \$3,959,131 |

This page left intentionally blank

BCC Segment 22: Perryville to Washington Union Station (Amtrak-owned)

Operators: Amtrak, MARC

| Investment Type | BCC Eligible | BCC Ineligible | Segment Total |
|-----------------|--------------|----------------|---------------|
| Programs | \$49,272,031 | \$0 | \$49,272,031 |
| Projects | \$19,670,896 | \$8,362,245 | \$28,033,141 |
| Total | \$68,942,927 | \$8,362,245 | \$77,305,172 |

Programs

| nvestment Description and FY21 Scope | Units | Start Date | End Date | FY21 Budge |
|--|--|------------------------|---------------------|------------|
| BCC Eligible | | | | |
| PG00021 - Mid-Atlantic South Catenary - C.EN.101829 | | | | |
| 250 SAP assemblies, 2 Cat Poles, and 2 Switch Heaters | | | | |
| Charles Switch Heater Replacement | Units not applicable | 10/1/2020 | 5/28/2021 | \$402,02 |
| Magnolia Switch Heater Replacement | Units not applicable | 10/1/2020 | 5/28/2021 | \$402,03 |
| Baltimore Station New Catenary Pole Install | | | | |
| C.EN.101829.0001 POLE BAL MD STA-NEW CAT POLE INSTALL | 2 EA Install / Rehabilitate Cat. Poles | 10/1/2020 | 10/29/2020 | \$664,65 |
| Carroll Interlocking to Bridge Interlocking SAP Installation Track 3 AP Line | | | | |
| C.EN.101829.0013 CAT CARROLL/BRIDGE I/L-SAP INSTALL TK2 | 125 EA Install / Renew SAP Assemblies | 10/1/2020 | 7/1/2022 | \$589,81 |
| PG00023 - Mid-Atlantic South Facilities - C.EN.101831 | | | | |
| Compressor Upgrades at Ivy City (MOFE), 480 Ground Power Upgrade, Electrical Upgrades | at Wash. Terminal, and I | High Mast Lighting Rep | lacement at Odenton | |
| Odenton MOFW High Mast Lighting AP Line | | | | |
| C.EN.101831.0005 MOFW ODENTON MD-HIGH MAST LIGHTING | 3 EA Facility Improvement, Install High Mast Light | 10/1/2020 | 9/30/2021 | \$582,31 |
| PG00025 - Mid-Atlantic South Signals - C.EN.101832 | | | | |
| Cable Replacement, 15 CIHs | | | | |
| Cable Replacement MP 110.2 - 111.2 AP Line | | | | |
| C.EN.101832.2020.01 Cable Replacement 57C, 49C, 37C in Amtrak owned duct bank (MP110.2 to MP111.2) | Units not applicable | 10/1/2020 | 9/30/2021 | \$412,87 |
| PG00026 - Mid-Atlantic South Structures - C.EN.101833 | | | | |
| Upgrades to: 4 culverts, 2 tunnels, 5 retaining walls, 5 signal bridges, 5 undergrade bridges, | and 3 movable bridges | | | |
| B&P Tunnel Slab Stabilization AP Line | | | | |
| C.EN.101833.2021.05 TUN BAL MD - BP TUNNEL SLAB STABILIZATION | Units not applicable | 10/1/2020 | 9/30/2021 | \$107,24 |
| Bush River Bridge Upgrades MP 72.14 AP Line | | | | |
| C.EN.101833.2021.10 BGMS BUSH RIVER BRG, MD - BUSH RIVER MP 72.14 UPGRADES | Units not applicable | 10/1/2020 | 9/30/2021 | \$160,86 |
| C.EN.101833.2021.30 BGMS BUSH RIVER BRG, MD - BEARING UPGRADE | Units not applicable | 10/1/2020 | 9/30/2021 | \$107,24 |
| Bush Signal Bridge Upgrade AP Line | | | | |
| C.EN.101833.2021.20 BGSG SIGNAL BRIDGE - BUSH SBHS | 1 EA Signal Bridge Component Upgrades | 10/1/2020 | 9/30/2021 | \$331,76 |
| Chase MD, Culvert Replacement MP 83.54 AP Line | | | | |
| | Units not applicable | 10/1/2020 | 9/30/2021 | \$1,072,40 |

| Investment Description and FY21 Scope | Units | Start Date | End Date | FY21 Budget |
|---|--|------------|-----------|-------------|
| C.EN.101833.2021.06 WALL MD 115.61 - CONCRETE ARCH UPGRADES | Units not applicable | 10/1/2020 | 9/30/2021 | \$214,480 |
| Concrete Bridge Slab MP 64.47 AP Line | | | | |
| C.EN.101833.2021.16 BGUG BRIDGE CONCRETE SLAB AT MP 64.47 | Units not applicable | 10/1/2020 | 9/30/2021 | \$160,860 |
| Deck Girder Bridge Superstructure Upgrade MP 94.07 AP Line | | | | |
| C.EN.101833.2021.07 BGUG SUBSTRUCTURE UPGRD FOR DECK GIRDER BRG AT MP 94.07 | Units not applicable | 10/1/2020 | 9/30/2021 | \$268,100 |
| North Point Road MP 90.98 AP Line | | | | |
| C.EN.101833.2021.19 BGUG MP 90.98 - NORTH POINT ROAD | Units not applicable | 10/1/2020 | 9/30/2021 | \$282,487 |
| Range Road Pier Rehab MP 115.61 AP Line | | | | |
| C.EN.101833.2021.18 BGUG MP 115.61 - RANGE ROAD PIER REHAB | Units not applicable | 10/1/2020 | 9/30/2021 | \$221,934 |
| Stone Wall Arch Upgrade MP 128.76 AP Line | | | | |
| C.EN.101833.2021.08 WALL - STONE ARCH UPGRD AT MP 128.76 | Units not applicable | 10/1/2020 | 9/30/2021 | \$214,480 |
| Susquehanna River Bridge Machinery Upgrades AP Line | | | | |
| C.EN.101833.2021.11 BGMS SUSQUEHANNA RIVER BRG MACHINERY UGRADES | Units not applicable | 10/1/2020 | 9/30/2021 | \$214,480 |
| PG00027 - Mid-Atlantic South Substations - C.EN.101834 | | | | |
| Tie switch replacement at 2 substations, and breaker replacement at Sub 15 | | | | |
| Baltimore Sub 20 Signal Power Frequency Converter AP Line | | | | |
| Baltimore Sub 20 - Signal Power Frequency Converter | 1 EA Install / Renew Frequency Converter | 10/1/2020 | 9/30/2021 | \$920,129 |
| Bowie Sub 23 Tie Switch Replacement AP Line | | | | |
| Bowie Sub 23 Tie Switch replacement | Units not applicable | 10/1/2020 | 9/30/2021 | \$213,917 |
| PG00028 - Mid-Atlantic South Track - C.EN.101835 | | | | |
| Replace 40 insulated joints, 260 joint eliminations, 260000 LF spot surfacing upgrades, 3400 replacements, & 100 concrete tie replacements along with associated drainage improvements. | | | | |
| Baltimore East Slope Stabilization AP Line | | | | |
| EPRJ001090 Baltimore East Slope Stabilization | Units not applicable | 10/1/2020 | 9/29/2021 | \$185,780 |
| Concrete Tie Replacement MP 131.6 - 135.0 AP Line | | | | |
| C.EN.101835.0038 TIES MADS CONCRETE AP LINE MP131.6-135.0 | 11 EA Install Ties, Concrete | 4/12/2021 | 6/24/2021 | \$36,796 |
| Concrete Tie Replacement MP 59.4 - 79.3 AP Line | | | | |
| C.EN.101835.0036 TIES MADS CONCRETE AP LINE MP59.4-79.3 | 11 EA Install Ties, Concrete | 2/8/2021 | 4/22/2021 | \$36,795 |
| Concrete Tie Replacement MP 79.3 - 131.6 AP Line | | | | |
| C.EN.101835.0037 TIES MADS CONCRETE AP LINE MP79.3-131.6 | 33 EA Install Ties, Concrete | 4/16/2021 | 7/7/2021 | \$110,387 |
| Drainage Improvements MP 103.9 AP Line | | | | |
| C.EN.101835.0103 DRAN AP LN MP 103.9-DRAINAGE IMPROVEMENT | 1 EA Stabilize Track | 10/1/2020 | 9/30/2021 | \$2,789,650 |
| Drainage Improvements MP 124.8 AP Line | | | | |
| EPRJ001089 AP-124.8 Drainage Improvements (Prince George County) | Units not applicable | 10/1/2020 | 9/29/2021 | \$49,672 |
| Drainage Improvements MP 59.4 - 79.3 AP Line | | | | |
| C.EN.101835.0027 DRAN MADS AP LN MP59.4/79.3-DRAN IMPV | Units not applicable | 10/1/2020 | 9/29/2021 | \$175,448 |
| High Speed Surfacing MP 131.6 - 135.0 AP Line | | | | |
| C.EN.101835.0109 GEOM MADS HSS SURFACE APLN MP131.6-135.0 | 3000 PF Surface Track, Spot | 3/8/2021 | 3/9/2021 | \$33,698 |
| High Speed Surfacing MP 59.4 - 79.3 AP Line | | | | |

| vestment Description and FY21 Scope | Units | Start Date | End Date | FY21 Budge |
|---|---|------------|------------|------------|
| C.EN.101835.0107 GEOM MADS HSS SURFACE AP LN MP59.4-79.3 | 3000 PF Surface Track, Spot | 1/28/2021 | 1/29/2021 | \$33,69 |
| High Speed Surfacing MP 79.3 - 131.6 AP Line | | | | |
| C.EN.101835.0108 GEOM MADS HSS SURFACE APLN MP79.3-131.6 | 3000 PF Surface Track, Spot | 2/17/2021 | 2/18/2021 | \$33,69 |
| Insulated Joint Removal MP 131.6 - 135.0 AP Line | | | | |
| C.EN.101835.0006 RAIL MADS INSLATE JT AP LN MP131.6-135.0 | 5 EA Install Insulated Joint (Includes OTM) | 3/8/2021 | 4/5/2021 | \$51,00 |
| Insulated Joint Removal MP 59.4 - 79.3 AP Line | | | | |
| C.EN.101835.0004 RAIL MADS INSULATED JT AP LN MP59.4-79.3 | 5 EA Install Insulated Joint (Includes OTM) | 1/5/2021 | 2/3/2021 | \$51,00 |
| Insulated Joint Removal MP 79.3 - 131.6 AP Line | | | | |
| C.EN.101835.0005 RAIL MADS INSULATE JT AP LN MP79.3-131.6 | 12 EA Install Insulated Joint (Includes OTM) | 2/4/2021 | 3/5/2021 | \$122,41 |
| Interlocking Steel MP 131.6 - 135.0 AP Line | | | | |
| C.EN.101835.0065 TURN MADS I/L STEEL AP LN MP131.6-135.0 | 20 EA Renew Frog | 1/6/2021 | 2/11/2021 | \$373,25 |
| Interlocking Steel MP 59.4 - 79.3 AP Line | | | | |
| C.EN.101835.0063 TURN MADS I/L STEEL AP LN MP59.4-79.3 | 10 EA Renew Frog | 11/27/2020 | 12/16/2020 | \$186,62 |
| Interlocking Steel MP 79.3 - 131.6 AP Line | | | | |
| C.EN.101835.0064 TURN MADS I/L STEEL AP LN MP79.3-131.6 | 30 EA Renew Frog | 12/16/2020 | 2/11/2021 | \$559,88 |
| Joint Elimination MP 131.6 - 135.0 AP Line | | | | |
| C.EN.101835.0017 RAIL MADS JOINT ELIM AP LN MP131.6-135.0 | 37 EA Field Weld and Grind Rail (Joint Elimination) | 1/6/2021 | 4/27/2021 | \$415,8 |
| Joint Elimination MP 59.4 - 79.3 AP Line | | | | |
| C.EN.101835.0015 RAIL MADS JOINT ELIM AP LINE MP59.4-79.3 | 37 EA Field Weld and Grind Rail (Joint Elimination) | 11/27/2020 | 3/22/2021 | \$415,85 |
| Joint Elimination MP 79.3 - 131.6 AP Line | | | | |
| C.EN.101835.0016 RAIL MADS JOINT ELIM AP LN MP79.3-131.6 | 37 EA Field Weld and Grind Rail (Joint Elimination) | 12/16/2020 | 4/8/2021 | \$415,8 |
| Roadbed Stabilization MP 118.9 AP Line | | | | |
| EPRJ001086 AP-118.9 Roadbed Stabilization | Units not applicable | 10/1/2020 | 9/29/2021 | \$24,92 |
| Spot Surfacing MP 131.6 - 135.0 AP Line | | | | |
| C.EN.101835.0075 GEOM MADS SPOT SURF AP LN MP131.6-135.0 | 20000 PF Surface Track, Spot | 10/1/2020 | 9/29/2021 | \$277,3 |
| Spot Surfacing MP 59.4 - 79.3 AP Line | | | | |
| C.EN.101835.0073 GEOM MADS SPOT SURF AP LN MP59.4-79.3 | 20000 PF Surface Track, Spot | 10/1/2020 | 9/29/2021 | \$277,3 |
| Spot Surfacing MP 79.3 - 131.6 AP Line | | | | |
| C.EN.101835.0074 GEOM MADS SPOT SURF AP LN MP79.3-131.6 | 350000 PF Surface Track, Spot | 10/1/2020 | 9/29/2021 | \$4,853,0 |
| Spot Undercutting MP 131.6 - 135.0 AP Line | | | | |
| C.EN.101835.0081 BLST MADS SPOT UNDRCT AP LNMP131.6-135.0 | 1000 FT Vacuum Train, Spot Undercut | 4/16/2021 | 4/23/2021 | \$351,91 |
| Spot Undercutting MP 59.4 - 79.3 AP Line | | | | |
| C.EN.101835.0079 BLST MADS SPOT UNDRCUT AP LN MP59.4-79.3 | 2000 FT Vacuum Train, Spot Undercut | 2/4/2021 | 2/11/2021 | \$703,82 |

| Investment Description and FY21 Scope | Units | Start Date | End Date | FY21 Budget |
|--|---|------------|------------|--------------|
| C.EN.101835.0080 BLST MADS SPOT UNDRCT AP LN MP79.3-131.6 | 2000 FT Vacuum Train, Spot Undercut | 2/11/2021 | 2/19/2021 | \$703,826 |
| Wood Tie/Timber Replacement MP 131.6 - 135.0 AP Line | | | | |
| C.EN.101835.0054 TIES MADS TIE/TIMBER AP LN MP131.6-135.0 | 100 EA Install Ties and Timbers | 4/6/2021 | 4/28/2021 | \$115,095 |
| Wood Tie/Timber Replacement MP 59.4 - 79.3 AP Line | | | | |
| C.EN.101835.0052 TIES MADS TIE/TIMBER AP LN MP59.4-79.3 | 50 EA Install Ties and Timbers | 2/4/2021 | 2/25/2021 | \$57,548 |
| Wood Tie/Timber Replacement MP 79.3 - 131.6 AP Line | | | | |
| C.EN.101835.0053 TIES MADS TIE/TIMBER AP LN MP79.3-131.6 | 650 EA Install Ties and Timbers | 3/8/2021 | 5/4/2021 | \$748,122 |
| PG00057 - TLS Concrete Tie Replacement - C.EN.101652 | | | | |
| 80,134 Concrete Ties; 320,534 FT CWR | | | | |
| Bridge to Grove Track 2 TLS MP 98.28 - 112.23 AP Line | | | | |
| 101652.BG172 TLS BRIDGE TO GROVE TK 2 - INSTALL | 21600 EA Install Ties, Concrete / 84480 FT Install Rail, CWR (Includes OTM) | 10/1/2020 | 12/17/2020 | \$15,848,182 |
| 101652.BG173 TLS BRIDGE TO GROVE TK 2 - ET SUPPORT | Units not applicable | 10/1/2020 | 12/17/2020 | \$338,098 |
| 101652.BG174 TLS BRIDGE TO GROVE TK 2 - C&S SUPPORT | Units not applicable | 10/1/2020 | 12/17/2020 | \$2,410,385 |
| 101652.BG175 TLS BRIDGE TO GROVE TK 2 - B&B SUPPORT | Units not applicable | 10/1/2020 | 12/17/2020 | \$404,002 |
| 101652.BG176 TLS BRIDGE TO GROVE TK 2 - T&E SUPPORT | Units not applicable | 10/1/2020 | 12/17/2020 | \$330,240 |
| PG00060 - Production High Speed Surfacing - C.EN.101855 | | | | |
| 300 Miles Surfaced by PROD HSS | | | | |
| High Speed Surfacing Production MP 131.6 - 135.0 AP Line | | | | |
| C.EN.101855.0059 GEOM AP LN MP 131.6-135.0 HSS PRODUCTION - 22 | Units not applicable | 10/1/2020 | 9/30/2021 | \$9,465 |
| High Speed Surfacing Production MP 59.4 - 79.3 AP Line | | | | |
| C.EN.101855.0055 GEOM AP LN MP 59.4 - 79.3 HSS PRODUCTION - 22 | Units not applicable | 10/1/2020 | 9/30/2021 | \$2,153,367 |
| High Speed Surfacing Production MP 6.4 - 17.1 AP Line | | | | |
| C.EN.101855.0045 GEOM AP LN MP 6.4 - 17.1 HSS PRODUCTION - 19 | Units not applicable | 10/1/2020 | 9/30/2021 | \$236,178 |
| High Speed Surfacing Production MP 79.3 - 131.6 AP Line | | | | |
| C.EN.101855.0057 GEOM AP LN MP 79.3-131.6 HSS PRODUCTION - 22 | Units not applicable | 10/1/2020 | 9/30/2021 | \$935,815 |
| PG00063 - Track Rehabilitation - C.EN.101859 | | | | |
| See below for further detail on planned FY21 work. | | | | |
| Perryville Yard Track Rehabilitation | | | | |
| Amtrak FA - Labor | Units not applicable | 8/2/2021 | 9/30/2021 | \$123,708 |
| C.EN.101859.2021.40 TKRH PERRYVILLE YD - PVL YARD | 2 EA Install Wood Turnout | 8/2/2021 | 9/30/2021 | \$3,368 |
| Install Switch | Units not applicable | 8/2/2021 | 9/30/2021 | \$378,748 |
| Remove Switch | Units not applicable | 8/2/2021 | 9/30/2021 | \$16,764 |
| Surfacing | Units not applicable | 8/2/2021 | 9/30/2021 | \$17,118 |
| PG00065 - Turnout Renewal - C.EN.101860 | | | | |
| See below for further detail on planned FY21 work. | | | | |
| Odenton Yard Track 1 Turnout | | | | |
| C.EN.101860 TURN ODENTON - B&B Support | Units not applicable | 5/3/2021 | 5/28/2021 | \$9,950 |

| Investment Description and FY21 Scope | Units | Start Date | End Date | FY21 Budget |
|--|---|-------------|-------------------|--------------|
| C.EN.101860 TURN ODENTON - C&S SUPPORT | 1 EA Install Switch Machine | 5/3/2021 | 5/28/2021 | \$67,201 |
| C.EN.101860 TURN ODENTON - ET SUPPORT | Units not applicable | 5/3/2021 | 5/28/2021 | \$19,761 |
| C.EN.101860 TURN ODENTON - T&E Support | Units not applicable | 5/3/2021 | 5/28/2021 | \$47,721 |
| C.EN.101860 TURN ODENTON YARD TK 1 | 1 EA Install Concrete Turnout | 5/3/2021 | 5/28/2021 | \$229,447 |
| Paul Interlocking #61A Turnout | | | | |
| C.EN.101860.0036TURN - PAUL #61A T/O - INSTALL | 1 EA Install Wood Turnout | 5/7/2021 | 12/28/2020 | \$576,204 |
| C.EN.101860.0037TURN - PAUL #61A T/O - ET SUPPORT | Units not applicable | 5/7/2021 | 5/20/2021 | \$17,291 |
| C.EN.101860.0038TURN - PAUL #61A T/O - T&E SUPPORT | Units not applicable | 5/7/2021 | 5/20/2021 | \$27,598 |
| C.EN.101860.0039TURN - PAUL #61A T/O - B&B SUPPORT | Units not applicable | 5/7/2021 | 5/20/2021 | \$9,950 |
| C.EN.101860.0040TURN - PAUL #61A T/O - C&S SUPPORT | 1 EA Install Switch Machine | 5/7/2021 | 5/20/2021 | \$268,378 |
| Paul Interlocking #61B Turnout | | | | |
| C.EN.101860.0036TURN - PAUL #61B T/O - INSTALL | 1 EA Install Wood Turnout | 5/7/2021 | 12/28/2020 | \$753,981 |
| C.EN.101860.0037TURN - PAUL #61B T/O - ET SUPPORT | Units not applicable | 5/7/2021 | 5/20/2021 | \$17,291 |
| C.EN.101860.0038TURN - PAUL #61B T/O - T&E SUPPORT | Units not applicable | 5/7/2021 | 5/20/2021 | \$27,598 |
| C.EN.101860.0039TURN - PAUL #61B T/O - B&B SUPPORT | Units not applicable | 5/7/2021 | 5/20/2021 | \$9,950 |
| C.EN.101860.0040TURN - PAUL #61B T/O - C&S SUPPORT | 1 EA Install Switch Machine | 5/7/2021 | 5/20/2021 | \$109,036 |
| PG00069 - Fence Upgrades - C.EN.101854 | | | | |
| See below for further detail on planned FY21 work. | | | | |
| Baltimore, MD Security Fence | | | | |
| C.EN.101854.0016 FEN BALTIMORE MD-SECURITY FENCE | 2600 FT Install / Repair Right of Way Fencing | 12/7/2020 | 2/23/2021 | \$587,338 |
| Harewoord, MD Fence Installation - Harewood Park Drive & Harewood Road | | | | |
| C.EN.101854.2021.10 FEN HAREWOOD, MD - HAREWOOD PARK DRIVE & HAREWOOD ROAD FEN INSTALL | 250 FT Install / Repair Right of Way Fencing | 10/1/2020 | 3/5/2021 | \$59,833 |
| Mid-Atlantic Division Bowie Station, MD - Impasse Fence Installation | | | | |
| C.EN.101854.2021.17 FEN MAD BOWIE STATION, MD - IMPASSE FENCE INSTALL | 2250 FT Install / Repair Right of Way Fencing | 10/1/2020 | 4/14/2021 | \$532,468 |
| Odenton, MD Security Fence - MP 110.0 to 110.6 | | | | |
| C.EN.101854.0017 FEN ODENTON MD MP110.0/110.6-SEC FENCE | 3400 FT Install / Repair Right of Way Fencing | 10/5/2020 | 12/2/2020 | \$766,865 |
| PG00071 - Production Wood Tie/Timber Replacement - C.EN.101858 | - | | | |
| See below for further detail on planned FY21 work. | | | | |
| Landover Interlocking Timber Replacement | | | | |
| C.EN.101858.2012 TIE/TIMBER REPLACEMENT - LANDOVER | 208 EA Install Ties | 10/1/2020 | 10/8/2020 | \$129,099 |
| | and Timbers | 10/1/2020 | 10/0/2020 | ψ127,077 |
| PG00083 - Communications System Upgrades - C.EN.101857 | | | | |
| See below for further detail on planned FY21 work. | | | | |
| Perryville to Washington Cable Install AP Line | | | | |
| C.EN.101857.0008 CABF PERRYVILLE/WAS-CABLE INSTALL | Units not applicable | 10/1/2020 | 4/6/2021 | \$65,221 |
| | | BCC Segment | 22 Programs Total | \$49,272,031 |

| Investment Description and FY21 Scope | Start Date | End Date | FY21 Budget |
|--|---------------------------------|---------------------------------|---------------------------|
| BCC Eligible | | | |
| P000029 - New Hanson-Landover Interlocking - C.EN.100201 | | | |
| FY21 Scope not available. | | | |
| C.EN.100201.0023 INT LANDOVER I/L - B&B DECOMMISSIONING | 11/2/2020 | 11/30/2020 | \$53,620 |
| P000120 - Mid-Atlantic South Signal System Upgrades to 562 - C.EN.101872 | | | |
| Design of two segments for 562 upgrades- Magnolia to Wood, and CP Ave to Landover. Construction of 562 upgrareplacement with new switch and signal cables and new track wires, and interlocking signals replacement. | des from Bush to Magr | nolia, including Switch | n and signal case |
| C.EN.101872.0002 ABS GRACE TO WOOD 562 UPGRADES-FINAL DSN | 6/1/2021 | 6/28/2024 | \$160,860 |
| C.EN.101872.0003 ABS OAK TO BUSH - 562 UPGRADES PHASE 1 | 10/1/2020 | 9/30/2024 | \$2,761,427 |
| P000130 - B&P Block Tie Replacement - C.EN.101885 | | | |
| Replacement of 1,000'+ of slab track, block ties and rail on Tracks No 2 & 3 in the B&P Tunnel. | | | |
| C.EN.101885.2301 TIES B&P TUN-BLK TIE IN HOUSE FINAL DSN | 10/1/2020 | 12/26/2024 | \$16,086 |
| C.EN.101885.4100 TIES B&P TUN-BLOCK TIE CNSTRUCT CNTRACTR | 12/30/2020 | 3/25/2025 | \$12,654,320 |
| C.EN.101885.4200 TIES B&P TUN-BLOCK TIE CONSTRUCTION TRK | 12/30/2020 | 3/25/2025 | \$1,286,880 |
| C.EN.101885.4601 TIES B&P TUN-BLOCK TIE CONSTRUCTION RWP | 12/30/2020 | 3/25/2025 | \$1,340,500 |
| C.EN.101885.4602 TIES B&P TUN-BLOCK TIE E.T. PROTECTION | 12/30/2020 | 3/25/2025 | \$5,362 |
| C.EN.101885.4603 TIES B&P TUN-BLOCK TIE C&S PROTECTION | 12/30/2020 | 3/25/2025 | \$348,530 |
| C.EN.101885.5100 TIES B&P TUN-BLOCK TIE/RAIL RENEWAL CM | 12/30/2020 | 3/25/2025 | \$348,530 |
| C.EN.101885.7100 TIES B&P TUN-BLOCK TIE/RAIL RENEWAL PM | 12/30/2020 | 3/25/2025 | \$69,706 |
| Construction Phase Design | 12/30/2020 | 3/25/2025 | \$16,086 |
| P000160 - Movable Point Frog Switch Machine Rod Replacement - C.EN.101894 | | | |
| The FY 21 scope is to complete the remaining 54 turnouts. | | | |
| C.EN.101894.0011 INT PERRY I/L MP59.5-MPF HST ROD REPLACE | 6/4/2021 | 6/26/2021 | \$72,785 |
| P000169 - Jericho Park Frequency Converter Replacement - C.EN.101750 | | | |
| Procure and initiate design contract. | | | |
| (Not provided) | 10/1/2020 | 9/30/2021 | \$536,204 |
| BCC Ineligible | | | |
| P000074 - Washington Terminal & Ivy City Facility Electrical Upgrades - C.EN.100850 | | | |
| Initiate design and construction on various subprojects. | | | |
| C.EN.100850.0008 MOFE IVY CITY-ELEC INFRASTRUC ASSESSMENT | 10/1/2020 | 9/30/2021 | \$2,209,145 |
| P000123 - Ivy City Potable Water System Replacement - C.EN.101718 | | | |
| "Procure third-party contractor and initiate construction which will extend into FY 2022. FY 21 Milestones: Construc | tion | | |
| C.EN.101718.0001 MOFE IVY CITY UTILITY UPGRADE-AMTRAK FA | 10/1/2020 | 9/30/2021 | \$433,933 |
| C.EN.101718.0002 MOFE IVY CITY UTILITY UPG-CONSTRUCTION | 10/1/2020 | 9/30/2021 | \$5,236,665 |
| C.EN.101718.0003 MOFE IVY CITY UTILITY UPG-ARCHEOLOGICAL | 10/1/2020 | 9/30/2021 | \$36,464 |
| C.EN.101718.0005 MOFE IVY CITY UTILITY UPG-TESTING | 6/3/2021 | 9/30/2021 | \$53,620 |
| C.EN.101718.0006 MOFE IVY CITY UTILITY UPG-PROJECT MGT. | 10/1/2020 | 9/30/2021 | \$70,697 |
| C.EN.101718.0008 MOFE IVY CITY UTILITY UPG-CONSTRUCT MGT. Tables include a subset of submitted capital renewal data. For complete details including BCC | 10/1/2020 C segment breakdow | 9/30/2021 vn, go to nec-comm | \$321,721 mission.com. |
| 2 Start of Somplete details including book | | 22 Projects Total | \$28,033,141 |

BCC Segment 23: Washington Union Terminal (Amtrak-owned)

| Terrimar (Arrierak ow | ilea) |
|------------------------------|-------|
| Operators: Amtrak, MARC, VRE | |

| Investment Type | BCC Eligible | BCC Ineligible | Segment Total |
|-----------------|--------------|----------------|---------------|
| Programs | \$4,130,939 | \$2,204,184 | \$6,335,124 |
| Projects | \$0 | \$678,066 | \$678,066 |
| Total | \$4,130,939 | \$2,882,250 | \$7,013,189 |

Programs

| Investment Description and FY21 Scope | Units | Start Date | End Date | FY21 Budget |
|--|---|------------------------|--------------------|-------------|
| BCC Eligible | | | | |
| PG00028 - Mid-Atlantic South Track - C.EN.101835 | | | | |
| Replace 40 insulated joints, 260 joint eliminations, 260000 LF spot surfacing upgrace replacements, & 100 concrete tie replacements along with associated drainage imp | | | | |
| Concrete Tie Replacement MP 135.0 - 136.0 AP Line | | | | |
| C.EN.101835.0039 TIES MADS CONCRETE AP LINE MP135.0-136.0 | 26 EA Install Ties, Concrete | 10/1/2020 | 10/5/2020 | \$24,526 |
| High Speed Surfacing MP 135.0 - 136.0 AP Line | | | | |
| C.EN.101835.0110 GEOM MADS HSS SURFACE APLN MP135.0-136.0 | 3000 PF Surface Track, Spot | 3/25/2021 | 3/26/2021 | \$33,698 |
| Insulated Joint Removal MP 135.0 - 136.0 AP Line | | | | |
| C.EN.101835.0007 RAIL MADS INSLATE JT AP LN MP135.0-136.0 | 5 EA Install Insulated Joint (Includes OTM) | 4/6/2021 | 5/4/2021 | \$102,014 |
| Interlocking Steel MP 135.0 - 136.0 AP Line | | | | |
| C.EN.101835.0066 TURN MADS I/L STEEL AP LN MP135.0-136.0 | 20 EA Renew Frog | 3/25/2021 | 4/29/2021 | \$373,254 |
| Joint Elimination MP 135.0 - 136.0 AP Line | | | | |
| C.EN.101835.0018 RAIL MADS JOINT ELIM AP LN MP135.0-136.0 | 37 EA Field Weld and Grind Rail (Joint Elimination) | 1/26/2021 | 5/14/2021 | \$415,853 |
| Spot Surfacing MP 135.0 - 136.0 AP Line | | | | |
| C.EN.101835.0076 GEOM MADS SPOT SURF AP LN MP135.0-136.0 | 20000 PF Surface Track, Spot | 10/1/2020 | 9/29/2021 | \$277,316 |
| Spot Undercutting MP 135.0 - 136.0 AP Line | | | | |
| C.EN.101835.0082 BLST MADS SPOT UNDRCT AP LNMP135.0-136.0 | 5000 FT Vacuum Train, Spot Undercut | 6/4/2021 | 6/11/2021 | \$1,759,565 |
| Wood Tie/Timber Replacement MP 135.0 - 136.0 AP Line | | | | |
| C.EN.101835.0055 TIES MADS TIE/TIMBER AP LN MP135.0-136.0 | 200 EA Install Ties and Timbers | 5/5/2021 | 6/4/2021 | \$230,193 |
| PG00071 - Production Wood Tie/Timber Replacement - C.EN.101858 | | | | |
| See below for further detail on planned FY21 work. | | | | |
| Washington Union Station Timber Replacement | | | | |
| C.EN.101858.2021.18 TIE/TIMBER REPLACEMENT - WAS | 500 EA Install Ties and Timbers | 10/12/2020 | 12/23/2020 | \$914,520 |
| BCC Ineligible | | | | |
| PG00023 - Mid-Atlantic South Facilities - C.EN.101831 | | | | |
| Compressor Upgrades at Ivy City (MOFE), 480 Ground Power Upgrade, Electrical U | lpgrades at Wash. Terminal, and Hig | gh Mast Lighting Repla | acement at Odenton | |
| Ivy City MOFE Compressor Upgrades AP Line | | | | |
| C.EN.101831.2021.16 MOFW IVY CITY - COMPRESSOR UPGRADE | Units not applicable | 10/1/2020 | 9/30/2021 | \$1,693,319 |
| Ivy City MOFE Electrical Asset Upgrades AP Line | | | | |

| Investment Description and FY21 Scope | Units | Start Date | End Date | FY21 Budget | |
|--|----------------------|------------|------------------|-------------|--|
| C.EN.101831.2021.05 MOFE ELECTRICAL ASSETS UPGRADE IN IVY CITY | Units not applicable | 10/1/2020 | 9/30/2021 | \$80,430 | |
| Ivy City MOFE S&I Roof Drainage Improvements Design AP Line | | | | | |
| C.EN.101831.0013 MOFE IVY CITY - S&I ROOF DRAINAGE IMPROVEMENT - DSN | Units not applicable | 10/1/2020 | 9/30/2021 | \$92,537 | |
| Ivy City MOFE Station Wayside 480 Ground Power Upgrade | | | | | |
| C.EN.101831.2021.01 MOFW IVY CITY - STATION WAYSIDE 480 GROUND POWER UPGRADE | Units not applicable | 10/1/2020 | 9/30/2021 | \$203,848 | |
| Ivy City MOFE Water Box Upgrades AP Line | | | | | |
| C.EN.101831.2021.03 MOFE IVY CITY - WATER BOXES UPGRADE | Units not applicable | 10/1/2020 | 9/30/2021 | \$53,620 | |
| Washington Union Station MOFE Electrical Asset Upgrades | | | | | |
| C.EN.101831.2021.04 MOFE ELECTIRCAL ASSETS UPGRADE IN UNION STATION | Units not applicable | 10/1/2020 | 9/30/2021 | \$80,430 | |
| BCC Segment 23 Programs Total | | | 3 Programs Total | \$6,335,124 | |

Projects

| Investment Description and FY21 Scope | Start Date | End Date | FY21 Budget |
|---|------------|----------|-------------|
| BCC Eligible | | | |
| P000180-MofE- ICT Facility Program - DC Ivy City Yard ICT Site Analysis-C.EN.101905 | | | |
| FY21 Scope not available. | | | |
| C.EN.CCCCC.0001 – Preliminary Design | 8/1/2021 | 4/1/2022 | \$426,367 |
| C.EN.CCCCC.0002 – PE Design review | 8/1/2021 | 4/1/2022 | \$61,449 |
| C.EN.CCCCCC.0003 – PE RWP | 8/1/2021 | 4/1/2022 | \$40,966 |
| C.EN.CCCCC.0004 – Project Management | 8/1/2021 | 4/1/2022 | \$149,285 |
| BCC Segment 23 Projects Total | | | \$678,066 |

BCC Segment 24: WAS to CP Virginia (Amtrak-owned)

 Investment Type
 BCC Eligible
 BCC Ineligible
 Segment Total

 Programs
 \$1,618,749
 \$0
 \$1,618,749


 Projects
 \$0
 \$0
 \$0

 Total
 \$1,618,749
 \$0
 \$1,618,749

Operators: Amtrak, VRE

Programs

| Investment Description and FY21 Scope | Units | Start Date | End Date | FY21 Budget |
|---|--------------------------------|-------------------------------|------------|-------------|
| BCC Eligible | | | | |
| PG00026 - Mid-Atlantic South Structures - C.EN.101833 | | | | |
| Upgrades to: 4 culverts, 2 tunnels, 5 retaining walls, 5 signal bridges, 5 undergrade | bridges, and 3 movable bridges | | | |
| 1st Avenue Fan Replacement AP Line | | | | |
| TUN - 1ST AVENUE FAN REPLACEMENT | Units not applicable | 10/1/2020 | 9/30/2021 | \$536,200 |
| 1st Street Tunnel Upgrades AP Line | | | | |
| C.EN.101833.2021.25 TUN - 1st STREET TUNNEL UPGRADES | Units not applicable | 10/1/2020 | 9/30/2021 | \$268,100 |
| PG00065 - Turnout Renewal - C.EN.101860 | | | | |
| See below for further detail on planned FY21 work. | | | | |
| A Interlocking #136 Turnout | | | | |
| C.EN.101860 TURN A IL MP #17 136T/O - INSTALL | Units not applicable | 12/1/2020 | 12/31/2020 | \$407,225 |
| C.EN.101860 TURN A IL MP 136 #19 T/O - INSTALL | Units not applicable | 11/2/2020 | 11/30/2020 | \$407,225 |
| | | BCC Segment 24 Programs Total | | |

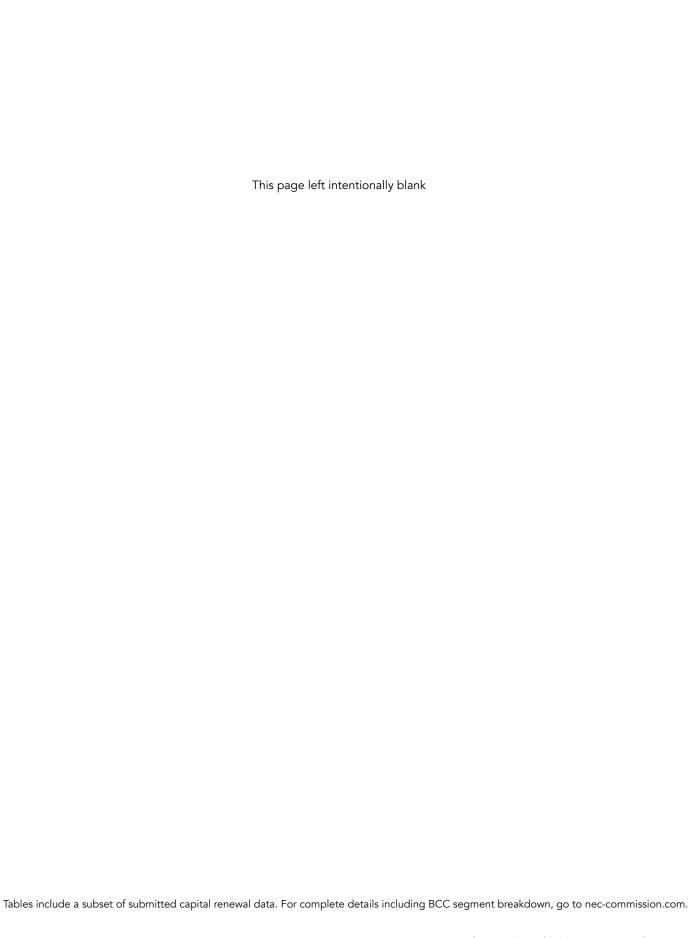

BCC Segment 25: Springfield to New Haven (Amtrak-owned)

Operators: Amtrak, CTrail Hartford Line

| Investment Type | BCC Eligible | BCC Ineligible | Segment Total |
|-----------------|--------------|----------------|---------------|
| Programs | \$22,496,451 | \$0 | \$22,496,451 |
| Projects | \$536,247 | \$0 | \$536,247 |
| Total | \$23,032,698 | \$0 | \$23,032,698 |

Programs

| Projects include switch machine replacements in Rhode Island, cable replacements at multiple locations in Connecticut, circuit protection upgrades on the AB Line in Connecticut and Rhode Island, upgrade the RTUs at Palmers Cove, Shaws, Mystic, and Conn by Amtrack Signal forces. Replace crossing general crossing recorder at 10 locations on the AS line. Install grade crossing recorder at 10 locations on the AS line. Install grade crossing recorder at 10 locations on the AS line. Install grade crossing recorder at 10 locations on the AS line. CEN.101839.0039 AB NED AS IN MP33.6-58.8 TRK CIRCUIT Units not applicable 3/2/2021 9/30/2021 \$965,3 Battery Bank Replacement MP 1.5 - 33.6 AS Line C.EN.101839.0039 INT NED AS LIN MP15.733.6 BATT BANK REPL Units not applicable 5/7/2021 5/15/2021 \$97.7 Battery Bank Replacement MP 55.8 - 62.0 AS Line C.EN.101839.0028 INT NED AS LIN MP15.8 AS Line C.EN.101839.0029 INT NED AS LIN MP35.8 AS Line C.EN.101839.0029 INT NED AS LIN MP33.6 AS BATT BANK REPL Units not applicable 7/9/2021 7/17/2021 \$86.0 Fuse Replacement MP 53.8 - 52.0 AS Line C.EN.101839.0029 INT NED AS LIN MP35.8 AS LINE C.EN.101839.0039 INT NED AS LIN MP33.6 AS SA SA Line C.EN.101839.0039 INT NED AS LIN MP35.8 AS CO-FUSE REPLACE Units not applicable 6/15/2021 9/28/2021 \$198.5 PTC Electric Lock Installation MP 50.4 - 53.9 AS Line C.EN.101839.0018 INT NED AS LIN MP50.4 AS 3.9 AS Line C.EN.101839.0018 INT NED AS LIN MP50.8 AS CO-FURACK LEADS Units not applicable 3/1/2021 6/1/2024 \$479.3 PG00034 - New England Structures - C.EN.101840 Complete the steel upgrades and bridge timber replacement at the Conn. River Bridge (CT49/73) on the AS Line and replace the bridge timbers on the Corn River Bridge CT070.6 89 on the AS Line Complete the installation of the Hull Street Strike Beam and steel and abutment upgrades to State fier (CT123.59 undergrade bridge. Complete source of | nvestment Description and FY21 Scope | Units | Start Date | End Date | FY21 Budge |
|--|---|--|-----------------------|-------------------------|------------------|
| Facilities upgrades include upgrades to the water mains and parking lot serving the Southampton Street Yard facility as well as upgrades to the train servicing platforms inside the SSR building, Complete safety and energy efficiency upgrades at Southampton Street and Hamden MOFW Facilities. Here C.E.N. 101838.0014 MOFW HAMDEN BASE UPGS Units not applicable 1/5/2021 4/6/2021 \$359.8 \$300033 - New England Signals - C.E.N. 101839 Projects include switch machine replacements in Rhode Mand, cable replacements at multiple locations in Connecticut, circuit protection upgrades on the AB Line in Connecticut and find cab fained pagnage the RM 15st at Palmers Core. Shaws, Mysic, and Corn by Amtrak Signal forces. Replace crossing gates and overlay circuits at three locations on the AB Line. Install grade crossing recorders at 10 locations. Battery Bank Replacement MP 15-33.6 AS Line C.E.N. 101839.0039 ABS NED AS LN M975.6/36-BATT BANK REPL Units not applicable 1/2/3/2020 3/5/2021 \$965.3 Battery Bank Replacement MP 15-33.6 AS Line C.E.N. 101839.0039 INT NED AS LN M975.8/8.6-BATT BANK REPL Units not applicable 5/7/2021 5/15/2021 \$97.7 Battery Bank Replacement MP 33.6-55.8 AS Line C.E.N. 101839.0039 INT NED AS LN M955.8/8.6-BATT BANK REPL Units not applicable 5/7/2021 5/15/2021 \$97.7 Battery Bank Replacement MP 33.6-55.8 AS Line C.E.N. 101839.0039 INT NED AS LN M955.8/8.6-BATT BANK REPL Units not applicable 5/7/2021 7/17/2021 \$86.0 PETERS Replacement MP 35.8-62.0 AB Line C.E.N. 101839.0039 INT NED AS LN M955.8/62.0-BATT BANK REPL Units not applicable 6/15/2021 9/28/2021 \$97.8 Battery Bank Replacement MP 35.8-62.0 AB Line C.E.N. 101839.0039 INT NED AS LN M955.8/62.0-BATT BANK REPL Units not applicable 6/15/2021 9/28/2021 \$97.8 Battery Bank Replacement MP 35.8-62.0 AB Line C.E.N. 101839.0039 INT NED AS LN M955.8/62.0-BATT BANK REPL Units not applicable 6/15/2021 9/28/2021 \$97.8 Battery Bank Replacement MP 35.8-62.0 AB Line C.E.N. 101839.0039 INT NED AS LN M955.8/62.0-BATT BANK REPL Units not applicable 6/15/2021 9/28/ | CC Eligible | | | | |
| Handen MOFW Base Upgrades Handen MOFW Base Upgrades PH C.E.N. 101838.0014 MOFW HAMDEN BASE UPGS Onits not applicable 1/5/2021 4/6/2021 \$359,8 G00033 - New England Signals - C.E.N. 101839 Policets include switch machine replacements in fitteds letand, cable replacements at multiple locations in Connecticut, circuit protection upgrades on the AB Line in Connecticut and Shodel letand, upgrade the RTB like at Patients Cone, Shaws, Mystic, and Coan by Anstreak Signal forces. Replace crossing gates and overflay circuits at three locations on the AS line. Install grade crossing recorders at 10 locations. ABS Track Circuit Upgrades MP 33.6 - 55.8 AS Line C.E.N. 101839.0039 ABS NED AS IN MP33.6/55.8 TRK CIRCUIT C.E.N. 101839.0039 ABS NED AS IN MP33.6/55.8 TRK CIRCUIT C.E.N. 101839.0039 INT NED AS IN MP15/33.6 BATT BANK REPL C.E.N. 101839.0039 INT NED AS IN MP15/33.6 BATT BANK REPL C.E.N. 101839.0039 INT NED AS IN MP33.6/55.8 AS Line C.E.N. 101839.0028 INT NED AS IN MP33.6/55.8 BAS Line C.E.N. 101839.0029 INT NED AS IN MP33.6/55.8 BAT BANK REPL C.E.N. 101839.0039 INT NED AS IN MP33.6/55.8 BAT BANK REPL C.E.N. 101839.0039 INT NED AS IN MP33.6/55.8 BAT BANK REPL C.E.N. 101839.0039 INT NED AS IN MP33.6/55.8 BAT BANK REPL C.E.N. 101839.0039 INT NED AS IN MP33.6/55.8 BAT BANK REPL C.E.N. 101839.0039 INT NED AS IN MP33.6/55.8 BAT BANK REPL C.E.N. 101839.0039 INT NED AS IN MP33.6/55.8 BAT BANK REPL C.E.N. 101839.0039 INT NED AS IN MP33.6/55.8 BAT BANK REPL C.E.N. 101839.0039 INT NED AS IN MP33.6/55.8 BAT BANK REPL C.E.N. 101839.0039 INT NED AS IN MP55.8/62.0 FUSE REPLACE C.E.N. 101839.0039 INT NED AS IN MP55.8/62.0 FUSE REPLACE C.E.N. 101839.0039 INT NED AS IN MP55.8/62.0 FUSE REPLACE C.E.N. 101839.0039 INT NED AS IN MP55.8/62.0 FUSE REPLACE C.E.N. 101839.0039 INT NED AS IN MP55.8/62.0 FUSE REPLACE C.E.N. 101839.0039 INT NED AS IN MP55.8/62.0 FUSE REPLACE C.E.N. 101839.0039 INT NED AS IN MP55.8/62.0 FUSE REPLACE C.E.N. 101839.0039 INT NED AS IN MP55.8/62.0 FUSE REPLACE C.E.N. 101839.0039 INT NED A | G00031 - New England Facilities - C.EN.101838 | | | | |
| PH C.EN.101838.0014 MOFW HAMDEN BASE UPGS Units not applicable 1/5/2021 4/6/2021 \$359,8 GO0033 - New England Signals - C.EN.101839 Projects include switch machine replacements in Rhode Island, cable replacements at multiple locations in Connecticut, circuit protection upgrades on the AB Line in Connecticut and Rhode Island, upgrade the Rrift Star Falmers Cove, Shaws, Mystic, and Conn by Amtrak Signal forces. Replace crossing gates and overlay circuits at three locations on the AS line. Install grade crossing recorders at 10 fecations. ABS Track Circuit Upgrades MP 33.6 - 55.8 AS Line C.EN.101839.0039 ABS NED AS LIN MP33.6/58.8 TEK CIRCUIT Units not applicable 3/2/2021 9/30/2021 \$965,3 Battery Bank Replacement MP 1.5 - 33.6 AS Line C.EN.101839.0030 INT NED AS LIN MP1.5/33.6-BATT BANK REPL Units not applicable 5/7/2021 5/15/2021 \$972,7 Battery Bank Replacement MP 55.8 - 62.0 AS Line C.EN.101839.0028 INT NED AS LIN MP33.6/55.8-BATT BANK REPL Units not applicable 7/9/2021 7/17/2021 \$98.0 Euse Replacement MP 35.8 - 62.0 AB Line C.EN.101839.0039 INT NED AS LIN MP33.6/55.8-BATT BANK REPL Units not applicable 7/9/2021 9/28/2021 \$198,5 PTC Electric Lock Installation MP 50.4 - 53.9 AS Line C.EN.101839.0039 INT NED AS LIN MP55.8/62.0-FUSE REPLACE Units not applicable 6/15/2021 9/28/2021 \$198,5 PTC Electric Lock Installation MP 50.4 - 53.9 AS Line C.EN.101839.0039 INT NED AS LIN MP55.8/62.0-FUSE REPLACE Units not applicable 3/1/2020 5/17/2021 \$196,5 PTC Electric Lock Installation MP 50.4 - 53.9 AS Line C.EN.101839.0039 INT NED AS LIN MP55.8/62.0-FUSE REPLACE Units not applicable 6/15/2021 9/28/2021 \$196,5 PTC Electric Lock Installation MP 50.4 - 53.9 AS Line C.EN.101839.0039 INT NED AS LIN MP55.8/62.0-FUSE REPLACE Units not applicable 3/1/2020 5/17/2021 \$196,5 PTC Electric Lock Installation MP 50.4 - 53.9 AS Line C.EN.101839.0039 INT NED AS LIN MP56.8/62.0-FUSE REPLACE Units not applicable 3/1/2020 5/17/2021 \$196,5 GO0034 - New England Structures - C.EN.101840 C.EN.101839.0039 England Structures - C.E | Facilities upgrades include upgrades to the water mains and parking lot serving the S&I building. Complete safety and energy efficiency upgrades at Southampton Stre | Southampton Street Yard facility as et and Hamden MOFW Facilities. | well as upgrades to t | he train servicing plat | forms inside the |
| Projects include switch machine replacements in Rhode Island, cable replacements at multiple locations in Connecticut, circuit protection upgrades on the AB Line in Connecticut and Rhode Island, upgrade the RTUs at Palmers Cove, Shaws, Mystic, and Corn by Amtrak Signal forces. Replace crossing generates at 10 locations on the AS Island. Install grade crossing generates at 10 locations on the AS Island. Install grade crossing generates at 10 locations on the AS Island. Install grade crossing generates at 10 locations on the AS Island. Install grade crossing generates at 10 locations on the AS Island. Install grade crossing generates at 10 locations on the AS Island. Install grade crossing generates at 10 locations on the AS Island. Install grade is 10 locations on the AS Island. Install grade is 10 locations on the AS Island. Install grade is 10 locations on the AS Island. Install grade is 10 locations on the AS Island. Install grade is 10 locations on the AS Island. Install grade is 10 locations on the AS Island. Install grade is 10 locations on the AS Island. Install grade is 10 locations on the AS Island. Install grade is 10 locations on the AS Island. Install grade is 10 location ins | Hamden MOFW Base Upgrades | | | | |
| Projects include switch machine replacements in Rihode Island, cable replacements at multiple locations in Connecticut, circuit protection upgrades on the AB Line in Connecticut and Rihode Island, upgrade the RIUs at Palmers Cove, Shaws, Mystic, and Conn by Amtrak Signal forces. Replace crossing gates and overlay circuits at three locations on the AS line. Install grade crossing recorders at 10 locations. ABS Track Circuit Upgrades MP 33.6 - 55.8 AS Line C.EN.101839.0039 ABS NED AS LN MP33.6/55.8-TRK CIRCUIT Units not applicable 3/2/2021 3/5/2021 3/5/2021 3/5/2021 \$216.3 Battery Bank Replacement MP 1.5 - 33.6 AS Line C.EN.101839.0030 INT NED AS LN MP1.5/33.6-BATT BANK REPL Units not applicable 5/7/2021 5/15/2021 5/15/2021 5/15/2021 \$77.7 Battery Bank Replacement MP 55.8 - 62.0 AS Line C.EN.101839.0028 INT NED AS LN MP55.8/42.0-BATT BANK REPL Units not applicable 7/9/2021 7/17/2021 \$8.0 C.EN.101839.0029 INT NED AS LN MP33.6/55.8-BATT BANK REPL Units not applicable 7/9/2021 7/17/2021 \$8.0 Fuse Replacement MP 53.8 - 62.0 AB Line C.EN.101839.0039 INT NED AS LN MP55.8/42.0-FUSE REPLACE Units not applicable 6/15/2021 9/28/2021 \$198.5 PTC Electric Lock Installation MP 50.4 - 53.9 AS Line C.EN.101839.0012 PTC AS LN MP50.4/53.9-ELEC LOCK INSTALL 2 EA Install EWL Location C.EN.101839.0018 INT NED AS LN MP55.8-62.0-TRACK LEADS Units not applicable 3/1/2021 5/17/2021 \$10,47.7 \$479.3 G00034 - New England Structures - C.EN.101840 Complete the steel upgrades and bridge timber replacement at the Conn. River Bridge (CT49.73) on the AS Line and replace the bridge timbers on the Conn. River Bridge (CT106.89) on the AS Line. Complete the installation of the Hull Street Strike Beam and steel and abutment upgrades to State Pier (CT123.59) undergade bridge. Complete everal SOGR projects at the five movable bridges on the AB Line. Design projects include retaring wall upgrades at Shoreline Junction, Hartford Tunnel Drainage Improvements and culter upgrades on both the AB and AB lines. C.EN | PH C.EN.101838.0014 MOFW HAMDEN BASE UPGS | Units not applicable | 1/5/2021 | 4/6/2021 | \$359,84 |
| and Rhode Island, upgrade the RTUs at Planters Cove, Shaws, Mystic, and Conn by Amtrak Signal forces. Replace crossing gates and overlay circuits at three locations on the AS line. Install grade crossing recorders at 10 locations. ABS Track Circuit Upgrades MP 33.6 - 55.8 AS Line C.EN.101839.0039 ABS NED AS LN MP33.6/55.8-TRK CIRCUIT Units not applicable 1/2/3/2002 3/5/2021 \$216,3 Battery Bank Replacement MP 1.5 - 33.6 AS Line C.EN.101839.0030 INT NED AS LN MP1.5/33.6-BATT BANK REPL Units not applicable 5/7/2021 5/15/2021 \$979,7 Battery Bank Replacement MP 55.8 - 62.0 AS Line C.EN.101839.0028 INT NED AS LN MP5.8/42.0-BATT BANK REPL Units not applicable 7/9/2021 7/17/2021 \$86,0 Fuse Replacement MP 33.6 - 55.8 AS Line C.EN.101839.0029 INT NED AS LN MP58.8/42.0-BATT BANK REPL Units not applicable 7/9/2021 7/17/2021 \$86,0 Fuse Replacement MP 55.8 - 62.0 AB Line C.EN.101839.0039 INT NED AS LN MP58.8/42.0-BATT BANK REPL Units not applicable 6/15/2021 7/28/2021 \$198,5 PTC Electric Lock Installation MP 50.4 - 53.9 AS Line C.EN.101839.0012 PTC AS LN MP50.4/53.9-ELEC LOCK INSTALL C.EN.101839.0012 PTC AS LN MP50.4/53.9-ELEC LOCK INSTALL C.EN.101839.0013 INT NED AS LN MP58.8-2.0-TRACK LEADS Units not applicable 3/1/2021 5/17/2021 \$10,4 \$479,3 **G00034 - New England Structures - C.EN.101840 Complete the steel upgrades and bridge timber replacement at the Conn. River Bridge (CT49.73) on the AS Line and replace the bridge timbers on the Conn. River Bridge (CT49.73) on the AS Line and replace the bridge timbers on the Conn. River Bridge (CT49.73) on the AS Line. Complete the steel upgrades and bridge timber replacement at the Conn. River Bridge (CT49.73) on the AS Line and replace the bridge timbers on the Conn. River Bridge (CT49.73) on the AS Line. Complete the steel upgrades on both the AB and AB lines. C.EN.101840.0024 BGUG CT49.73 CONN RIVER-STEEL CMRCNOR Units not applicable 1/2/1/2020 5/28/2021 \$4,167,3 C.EN.101840.0026 BGUG CT49.73 CONN RIVER-STEEL CMRCNOR Units not appli | PG00033 - New England Signals - C.EN.101839 | | | | |
| Section Sect | and Rhode Island, upgrade the RTUs at Palmers Cove, Shaws, Mystic, and Conn by | | | | |
| Battery Bank Replacement MP 1.5 - 33.6 AS Line C.EN.101839.0030 INT NED AS LN MP1.5/33.6-BATT BANK REPL Units not applicable 5/7/2020 3/5/2021 \$216,3 Battery Bank Replacement MP 55.8 - 62.0 AS Line C.EN.101839.0028 INT NED AS LN MP55.8/62.0-BATT BANK REPL Units not applicable 5/7/2021 5/15/2021 \$97.7 Battery Bank Replacement MP 33.6 - 55.8 AS Line C.EN.101839.0029 INT NED AS LN MP55.8/62.0-BATT BANK REPL Units not applicable 7/9/2021 7/17/2021 \$86,0 Fuse Replacement MP 55.8 - 62.0 AB Line C.EN.101839.0008 INT NED AS LN MP55.8/62.0-FUSE REPLACE Units not applicable 6/15/2021 9/28/2021 \$198,5 PTC Electric Lock Installation MP 50.4 - 53.9 AS Line C.EN.101839.00112 PTC AS LN MP50.4/53.9-ELEC LOCK INSTALL Location C.EN.101839.0018 INT NED AS LN MP55.8/62.0-TRACK LEADS Units not applicable 3/1/2020 5/17/2021 \$510,4 C.EN.101839.0018 INT NED AS LN MP55.8-62.0-TRACK LEADS Units not applicable 3/1/2021 6/7/2024 \$479,3 **G00034 - New England Structures - C.EN.101840 Complete the steel upgrades and bridge timber replacement at the Comn. River Bridge (CT149.73) on the AS Line and replace the bridge timbers on the Comn. River Bridge several SCGR projects at the five movable bridges on the AB Line. Design projects include retaining wall upgrades at Shoreline Junction, Hartford Tunnel Drainage Improvements and culvert upgrades on both the AB and AB lines. **Conn River Bridge Steel/Timber Upgrades MP 49.72 AS Line C.EN.101840.0024 BGUG CT49.73 CONN RIVER-STEEL CM7CSN RVW Units not applicable 1/4/2021 5/28/2021 \$119,0 C.EN.101840.0026 BGUG CT49.73 CONN RIVER-STEEL CM7CSN RVW Units not applicable 1/4/2021 5/28/2021 \$119,0 1/4/2021 5/28/2021 \$119,0 | ABS Track Circuit Upgrades MP 33.6 - 55.8 AS Line | | | | |
| September Sept | C.EN.101839.0039 ABS NED AS LN MP33.6/55.8-TRK CIRCUIT | Units not applicable | 3/2/2021 | 9/30/2021 | \$965,33 |
| ### Battery Bank Replacement MP 55.8 - 62.0 AS Line C.EN.101839.0028 INT NED AS LN MP55.8/62.0-BATT BANK REPL Durits not applicable T/9/2021 T/17/2021 \$86,0 Fuse Replacement MP 33.6 - 55.8 AS Line C.EN.101839.0029 INT NED AS LN MP33.6/55.8-BATT BANK REPL Units not applicable T/9/2021 T/17/2021 \$86,0 Fuse Replacement MP 55.8 - 62.0 AB Line C.EN.101839.0008 INT NED AS LN MP55.8/62.0-FUSE REPLACE Units not applicable Track Leads MP 55.8 - 62.0 AS Line C.EN.101839.00112 PTC AS LN MP50.4/53.9-BLEC LOCK INSTALL C.EN.101839.0018 INT NED AS LN MP55.8-62.0-TRACK LEADS Units not applicable Track Leads MP 55.8 - 62.0 AS Line C.EN.101839.0018 INT NED AS LN MP55.8-62.0-TRACK LEADS Units not applicable Track Leads MP 55.8 - 62.0 AS Line C.EN.101839.0018 INT NED AS LN MP55.8-62.0-TRACK LEADS Units not applicable Track Leads MP 55.8 - 62.0 AS Line C.EN.101839.0018 INT NED AS LN MP50.8-62.0-TRACK LEADS Units not applicable Track Leads MP 55.8 - 62.0 AS Line C.EN.101839.0018 INT NED AS LN MP50.8-62.0-TRACK LEADS Units not applicable Track Leads MP 55.8 - 62.0 AS Line C.EN.101839.0018 INT NED AS LN MP50.8-62.0-TRACK LEADS Units not applicable Track Leads MP 55.8 - 62.0 AS Line C.EN.101840.0026 BGUG CT49.73 CONN RIVER-STEEL CNTCTOR Units not applicable 1/4/2020 5/15/2021 \$4,167,3 C.EN.101840.0026 BGUG CT49.73 CONN RIVER-STEEL CNTCTOR Units not applicable 1/4/2021 5/28/2021 \$4,167,3 C.EN.101840.0026 BGUG CT49.73 CONN RIVER-STEEL LOW/DSN RWW Units not applicable 1/4/2021 5/28/2021 \$4,167,3 C.EN.101840.0026 BGUG CT49.73 CONN RIVER-STEEL LOW/DSN RWW Units not applicable 1/4/2021 5/28/2021 \$119,0 1038 EA Install Bridge Timber | Battery Bank Replacement MP 1.5 - 33.6 AS Line | | | | |
| C.EN.101839.0028 INT NED AS LN MP55.8/62.0-BATT BANK REPL Units not applicable 5/7/2021 5/15/2021 \$97,7 | C.EN.101839.0030 INT NED AS LN MP1.5/33.6-BATT BANK REPL | Units not applicable | 12/3/2020 | 3/5/2021 | \$216,33 |
| Battery Bank Replacement MP 33.6 - 55.8 AS Line C.EN.101839.0029 INT NED AS LM MP33.6/55.8-BATT BANK REPL Units not applicable 7/9/2021 7/17/2021 \$86,0 Fuse Replacement MP 55.8 - 62.0 AB Line C.EN.101839.0008 INT NED AS LM MP55.8/62.0-FUSE REPLACE Units not applicable 6/15/2021 9/28/2021 \$198,5 PTC Electric Lock Installation MP 50.4 - 53.9 AS Line C.EN.101839.0112 PTC AS LM MP50.4/53.9-ELEC LOCK INSTALL 2 EA Install EWL Location 7/7/2021 5/17/ | Battery Bank Replacement MP 55.8 - 62.0 AS Line | | | | |
| C.EN.101839.0029 INT NED AS LN MP33.6/55.8-BATT BANK REPL Units not applicable 7/9/2021 7/17/2021 \$86,0 Fuse Replacement MP 55.8 - 62.0 AB Line C.EN.101839.0008 INT NED AS LN MP55.8/62.0-FUSE REPLACE Units not applicable 6/15/2021 9/28/2021 \$198,5 PTC Electric Lock Installation MP 50.4 - 53.9 AS Line C.EN.101839.0112 PTC AS LN MP50.4/53.9-ELEC LOCK INSTALL 2 EA Install EWL Location 10/1/2020 5/17/2021 \$510,4 Location Track Leads MP 55.8 - 62.0 AS Line C.EN.101839.0018 INT NED AS LN MP55.8-62.0-TRACK LEADS Units not applicable 3/1/2021 6/7/2024 \$479,3 PG00034 - New England Structures - C.EN.101840 Complete the steel upgrades and bridge timber replacement at the Conn. River Bridge (CT49.73) on the AS Line and replace the bridge timbers on the Conn. River Bridge (CT10.8.9) on the AB Line. Complete the installation of the Hull Street Strike Beam and steel and abutment upgrades to State Pier (CT123.59) undergrade bridge. Complete several SOGR projects at the five movable bridges on the AB Line. Design projects include retaining wall upgrades at Shoreline Junction, Hartford Tunnel Drainage Improvements and culvert upgrades on both the AB and AB lines. Conn River Bridge Steel/Timber Upgrades MP 49.72 AS Line C.EN.101840.0024 BGUG CT49.73 CONN RIVER-STEEL CNTRCTOR Units not applicable 1/4/2021 5/28/2021 \$4,167,3 C.EN.101840.0025 BGUG CT49.73 CONN RIVER-STEEL CM/DSN RVW Units not applicable 1/4/2021 5/28/2021 \$119,0 | C.EN.101839.0028 INT NED AS LN MP55.8/62.0-BATT BANK REPL | Units not applicable | 5/7/2021 | 5/15/2021 | \$97,71 |
| Fuse Replacement MP 55.8 - 62.0 AB Line C.EN.101839.0008 INT NED AS LN MP55.8/62.0-FUSE REPLACE Units not applicable 6/15/2021 9/28/2021 \$198,5 PTC Electric Lock Installation MP 50.4 - 53.9 AS Line C.EN.101839.0112 PTC AS LN MP50.4/53.9-ELEC LOCK INSTALL 2 EA Install EWL Location 10/1/2020 5/17/2021 \$510,4 Location Track Leads MP 55.8 - 62.0 AS Line C.EN.101839.0018 INT NED AS LN MP55.8-62.0-TRACK LEADS Units not applicable 3/1/2021 6/7/2024 \$479,3 G00034 - New England Structures - C.EN.101840 Complete the steel upgrades and bridge timber replacement at the Conn. River Bridge (CT49.73) on the AS Line and replace the bridge timbers on the Conn. River Bridge (CT106.89) on the AB Line. Complete the installation of the Hull Street Strike Beam and steel and abutment upgrades to State Pier (CT123.59) undergrade bridge. Complete several SOGR projects at the five movable bridges on the AB Line. Design projects include retaining wall upgrades at Shoreline Junction, Hartford Tunnel Drainage Improvements and culvert upgrades on both the AB and AB lines. Conn River Bridge Steel/Timber Upgrades MP 49.72 AS Line C.EN.101840.0024 BGUG CT49.73 CONN RIVER-STEEL CNTRCTOR Units not applicable 12/1/2020 5/28/2021 \$4,167,3 C.EN.101840.0025 BGUG CT49.73 CONN RIVER-STEEL CM/DSN RVW Units not applicable 1/4/2021 5/28/2021 \$119,0 C.EN.101840.0026 BGUG CT49.73 CONN RVER-STEEL UPG TK1 RWP 1038 EA Install Bridge Timber | Battery Bank Replacement MP 33.6 - 55.8 AS Line | | | | |
| C.EN.101839.0008 INT NED AS LN MP55.8/62.0-FUSE REPLACE Units not applicable 6/15/2021 9/28/2021 \$198,5 PTC Electric Lock Installation MP 50.4 - 53.9 AS Line C.EN.101839.0112 PTC AS LN MP50.4/53.9-ELEC LOCK INSTALL 2 EA Install EWL Location 10/1/2020 5/17/2021 \$510,4 Track Leads MP 55.8 - 62.0 AS Line C.EN.101839.0018 INT NED AS LN MP55.8-62.0-TRACK LEADS Units not applicable 3/1/2021 6/7/2024 \$479,3 PG00034 - New England Structures - C.EN.101840 Complete the steel upgrades and bridge timber replacement at the Conn. River Bridge (CT49.73) on the AS Line and replace the bridge timbers on the Conn. River Bridge (CT106.89) on the AB Line. Complete the installation of the Hull Street Strike Beam and steel and abutment upgrades to State Pier (CT123.59) undergrade bridge. Complete several SOGR projects at the five movable bridges on the AB Line. Design projects include retaining wall upgrades at Shoreline Junction, Hartford Tunnel Drainage Improvements and culvert upgrades on both the AB and AB lines. Conn River Bridge Steel/Timber Upgrades MP 49.72 AS Line C.EN.101840.0024 BGUG CT49.73 CONN RIVER-STEEL CNTRCTOR Units not applicable 1/4/2021 5/28/2021 \$4,167,3 C.EN.101840.0026 BGUG CT49.73 CONN RIVER-STEEL CM/DSN RW Units not applicable 1/4/2021 5/28/2021 \$119,0 | C.EN.101839.0029 INT NED AS LN MP33.6/55.8-BATT BANK REPL | Units not applicable | 7/9/2021 | 7/17/2021 | \$86,07 |
| C.EN.101839.0008 INT NED AS LN MP55.8/62.0-FUSE REPLACE Units not applicable 6/15/2021 9/28/2021 \$198,5 PTC Electric Lock Installation MP 50.4 - 53.9 AS Line C.EN.101839.0112 PTC AS LN MP50.4/53.9-ELEC LOCK INSTALL 2 EA Install EWL Location 10/1/2020 5/17/2021 \$510,4 Track Leads MP 55.8 - 62.0 AS Line C.EN.101839.0018 INT NED AS LN MP55.8-62.0-TRACK LEADS Units not applicable 3/1/2021 6/7/2024 \$479,3 PG00034 - New England Structures - C.EN.101840 Complete the steel upgrades and bridge timber replacement at the Conn. River Bridge (CT49.73) on the AS Line and replace the bridge timbers on the Conn. River Bridge (CT106.89) on the AB Line. Complete the installation of the Hull Street Strike Beam and steel and abutment upgrades to State Pier (CT123.59) undergrade bridge. Complete several SOGR projects at the five movable bridges on the AB Line. Design projects include retaining wall upgrades at Shoreline Junction, Hartford Tunnel Drainage Improvements and culvert upgrades on both the AB and AB lines. Conn River Bridge Steel/Timber Upgrades MP 49.72 AS Line C.EN.101840.0024 BGUG CT49.73 CONN RIVER-STEEL CNTRCTOR Units not applicable 1/4/2021 5/28/2021 \$4,167,3 C.EN.101840.0026 BGUG CT49.73 CONN RIVER-STEEL CM/DSN RW Units not applicable 1/4/2021 5/28/2021 \$119,0 | Fuse Replacement MP 55.8 - 62.0 AB Line | | | | |
| C.EN.101839.0112 PTC AS LN MP50.4/53.9-ELEC LOCK INSTALL 2 EA Install EWL Location 10/1/2020 5/17/2021 \$510,4 Track Leads MP 55.8 - 62.0 AS Line C.EN.101839.0018 INT NED AS LN MP55.8-62.0-TRACK LEADS Units not applicable 3/1/2021 6/7/2024 \$479,3 Complete the steel upgrades and bridge timber replacement at the Conn. River Bridge (CT49.73) on the AS Line and replace the bridge timbers on the Conn. River Bridge (CT106.89) on the AB Line. Complete the installation of the Hull Street Strike Beam and steel and abutment upgrades to State Pier (CT123.59) undergrade bridge. Complete several SOGR projects at the five movable bridges on the AB Line. Design projects include retaining wall upgrades at Shoreline Junction, Hartford Tunnel Drainage Improvements and culvert upgrades on both the AB and AB lines. Conn River Bridge Steel/Timber Upgrades MP 49.72 AS Line C.EN.101840.0024 BGUG CT49.73 CONN RIVER-STEEL CNTRCTOR Units not applicable 1/4/2021 5/28/2021 \$119,0 C.EN.101840.0026 BGUG CT49.73 CONN RIVER-STEEL LPG TK1 RWP 1038 EA Install Bridge Timber 1/4/2021 5/28/2021 \$170,5 | | Units not applicable | 6/15/2021 | 9/28/2021 | \$198,58 |
| Track Leads MP 55.8 - 62.0 AS Line C.EN.101839.0018 INT NED AS LN MP55.8-62.0-TRACK LEADS Units not applicable 3/1/2021 6/7/2024 \$479,3 200034 - New England Structures - C.EN.101840 Complete the steel upgrades and bridge timber replacement at the Conn. River Bridge (CT49.73) on the AS Line and replace the bridge timbers on the Conn. River Bridge (CT106.89) on the AB Line. Complete the installation of the Hull Street Strike Beam and steel and abutment upgrades to State Pier (CT123.59) undergrade bridge. Complete several SOGR projects at the five movable bridges on the AB Line. Design projects include retaining wall upgrades at Shoreline Junction, Hartford Tunnel Drainage Improvements and culvert upgrades on both the AB and AB lines. Conn River Bridge Steel/Timber Upgrades MP 49.72 AS Line C.EN.101840.0024 BGUG CT49.73 CONN RIVER-STEEL CNTRCTOR Units not applicable 12/1/2020 5/28/2021 \$4,167,3 C.EN.101840.0026 BGUG CT49.73 CONN RIVER-STEEL UPG TK1 RWP 1038 EA Install Bridge Timber 1/4/2021 5/28/2021 \$170,5 | PTC Electric Lock Installation MP 50.4 - 53.9 AS Line | | | | |
| C.EN.101839.0018 INT NED AS LN MP55.8-62.0-TRACK LEADS Units not applicable 3/1/2021 6/7/2024 \$479,3 2G00034 - New England Structures - C.EN.101840 Complete the steel upgrades and bridge timber replacement at the Conn. River Bridge (CT49.73) on the AS Line and replace the bridge timbers on the Conn. River Bridge (CT10.89) on the AB Line. Complete the installation of the Hull Street Strike Beam and steel and abutment upgrades to State Pier (CT123.59) undergrade bridge. Complete several SOGR projects at the five movable bridges on the AB Line. Design projects include retaining wall upgrades at Shoreline Junction, Hartford Tunnel Drainage Improvements and culvert upgrades on both the AB and AB lines. Conn River Bridge Steel/Timber Upgrades MP 49.72 AS Line C.EN.101840.0024 BGUG CT49.73 CONN RIVER-STEEL CNTRCTOR Units not applicable 12/1/2020 5/28/2021 \$4,167,3 C.EN.101840.0025 BGUG CT49.73 CONN RIVER-STEEL CM/DSN RVW Units not applicable 1/4/2021 5/28/2021 \$119,0 C.EN.101840.0026 BGUG CT49.73 CONN RVER-STEEL UPG TK1 RWP 1038 EA Install Bridge Timber | C.EN.101839.0112 PTC AS LN MP50.4/53.9-ELEC LOCK INSTALL | | 10/1/2020 | 5/17/2021 | \$510,41 |
| Complete the steel upgrades and bridge timber replacement at the Conn. River Bridge (CT49.73) on the AS Line and replace the bridge timbers on the Conn. River Bridge (CT106.89) on the AB Line. Complete the installation of the Hull Street Strike Beam and steel and abutment upgrades to State Pier (CT123.59) undergrade bridge. Complete several SOGR projects at the five movable bridges on the AB Line. Design projects include retaining wall upgrades at Shoreline Junction, Hartford Tunnel Drainage Improvements and culvert upgrades on both the AB and AB lines. Conn River Bridge Steel/Timber Upgrades MP 49.72 AS Line C.EN.101840.0024 BGUG CT49.73 CONN RIVER-STEEL CNTRCTOR Units not applicable 1/4/2021 5/28/2021 \$119,0 C.EN.101840.0026 BGUG CT49.73 CONN RIVER-STEEL UPG TK1 RWP 1038 EA Install Bridge Timber | Track Leads MP 55.8 - 62.0 AS Line | | | | |
| Complete the steel upgrades and bridge timber replacement at the Conn. River Bridge (CT49.73) on the AS Line and replace the bridge timbers on the Conn. River Bridge (CT106.89) on the AB Line. Complete the installation of the Hull Street Strike Beam and steel and abutment upgrades to State Pier (CT123.59) undergrade bridge. Complete several SOGR projects at the five movable bridges on the AB Line. Design projects include retaining wall upgrades at Shoreline Junction, Hartford Tunnel Drainage Improvements and culvert upgrades on both the AB and AB lines. Conn River Bridge Steel/Timber Upgrades MP 49.72 AS Line C.EN.101840.0024 BGUG CT49.73 CONN RIVER-STEEL CNTRCTOR Units not applicable 1/4/2020 5/28/2021 \$119,0 C.EN.101840.0026 BGUG CT49.73 CONN RVER-STEEL UPG TK1 RWP 1038 EA Install Bridge Timber | C.EN.101839.0018 INT NED AS LN MP55.8-62.0-TRACK LEADS | Units not applicable | 3/1/2021 | 6/7/2024 | \$479,31 |
| (CT106.89) on the AB Line. Complete the installation of the Hull Street Strike Beam and steel and abutment upgrades to State Pier (CT123.59) undergrade bridge. Complete several SOGR projects at the five movable bridges on the AB Line. Design projects include retaining wall upgrades at Shoreline Junction, Hartford Tunnel Drainage Improvements and culvert upgrades on both the AB and AB lines. Conn River Bridge Steel/Timber Upgrades MP 49.72 AS Line C.EN.101840.0024 BGUG CT49.73 CONN RIVER-STEEL CNTRCTOR Units not applicable 12/1/2020 5/28/2021 \$4,167,3 C.EN.101840.0025 BGUG CT49.73 CONN RIVER-STEEL CM/DSN RVW Units not applicable 1/4/2021 5/28/2021 \$119,0 C.EN.101840.0026 BGUG CT49.73 CONN RVER-STEEL UPG TK1 RWP 1038 EA Install Bridge Timber | PG00034 - New England Structures - C.EN.101840 | | | | |
| Conn River Bridge Steel/Timber Upgrades MP 49.72 AS Line C.EN.101840.0024 BGUG CT49.73 CONN RIVER-STEEL CNTRCTOR Units not applicable 12/1/2020 5/28/2021 \$4,167,3 C.EN.101840.0025 BGUG CT49.73 CONN RIVER-STEEL CM/DSN RVW Units not applicable 1/4/2021 5/28/2021 \$119,0 C.EN.101840.0026 BGUG CT49.73 CONN RVER-STEEL UPG TK1 RWP 1038 EA Install Bridge Timber 1/4/2021 5/28/2021 \$170,5 | (CT106.89) on the AB Line. Complete the installation of the Hull Street Strike Beam several SOGR projects at the five movable bridges on the AB Line. Design projects | and steel and abutment upgrades t | o State Pier (CT123.5 | 9) undergrade bridge | . Complete |
| C.EN.101840.0025 BGUG CT49.73 CONN RIVER-STEEL CM/DSN RVW Units not applicable 1/4/2021 5/28/2021 \$119,0 C.EN.101840.0026 BGUG CT49.73 CONN RVER-STEEL UPG TK1 RWP 1038 EA Install Bridge Timber 5/28/2021 \$170,5 | | | | | |
| C.EN.101840.0026 BGUG CT49.73 CONN RVER-STEEL UPG TK1 RWP 1038 EA Install 1/4/2021 5/28/2021 \$170,5 Bridge Timber | C.EN.101840.0024 BGUG CT49.73 CONN RIVER-STEEL CNTRCTOR | Units not applicable | 12/1/2020 | 5/28/2021 | \$4,167,34 |
| Bridge Timber | C.EN.101840.0025 BGUG CT49.73 CONN RIVER-STEEL CM/DSN RVW | Units not applicable | 1/4/2021 | 5/28/2021 | \$119,05 |
| | C.EN.101840.0026 BGUG CT49.73 CONN RVER-STEEL UPG TK1 RWP | | 1/4/2021 | 5/28/2021 | \$170,59 |
| | C.EN.101840.0027 BGUG CT49.73 CONN RVR-STEEL UPG TK1 F/A | Units not applicable | 12/1/2020 | 5/28/2021 | \$514,66 |


| Investment Description and FY21 Scope | Units | Start Date | End Date | FY21 Budget |
|---|--------------------------------------|------------------------|----------------------|---|
| C.EN.101840.0033 BGMS CT106.89 CONN RIVER ELEC UPG CONT | Units not applicable | 9/1/2020 | 11/6/2020 | \$41,967 |
| Culvert Replacement Design & Construction MP 44.10 AS Line | | | | |
| C.EN.101840.0039 CULV CT 44.10 REPLACEMENT FINAL DESIGN - B&B | Units not applicable | 4/1/2021 | 9/30/2021 | \$63,465 |
| Hart Tunnel Drainage Improvements MP 36.99 | | | | |
| C.EN.101840.0044 DRAN HART TUNNEL MP 36.99 FINAL DSGN | Units not applicable | 1/4/2021 | 6/30/2021 | \$345,640 |
| C.EN.101840.0012 DRAN HART TUN MP36.99-ALT. ANALYSIS DSN | Units not applicable | 10/1/2020 | 5/28/2021 | \$93,618 |
| Undergrade Bridge Line and Grout Replacement MP 49.15 AS Line | | | | |
| C.EN.101840.0040 BGUG CT 49.15 LINE AND GROUT REPLACEMENT CONSTRUCTION - B&B CM | Units not applicable | 4/1/2021 | 3/29/2022 | \$28,938 |
| PG00036 - New England Track - C.EN.101842 | | | | |
| Replace wood ties, concrete ties, interlocking steel, and insulated joints as well as co in Connecticut and Rhode Island. Perform ride quality, drainage, and road bed impro Connecticut and Massachusetts and the AB Line in Connecticut and Rhode Island. W | ovements through spot surfacing, | spot undercutting, dit | ching and grading ac | s and the AB Line cross the AS Line in |
| C.EN.101842.0112 GEOM NED SPOT SURFACE AS LN MP1.5-62.0 | | | | |
| C.EN.101842.0112 GEOM NED SPOT SURFACE AS LN MP1.5-62.0 | Units not applicable | 10/1/2020 | 9/30/2021 | \$771,171 |
| C.EN.101842.0114 BLST SPOT UNDERCUTTING AS LN MP1.5-62.0 | | | | |
| C.EN.101842.0114 BLST SPOT UNDERCUTTING AS LN MP1.5-62.0 | Units not applicable | 10/1/2020 | 10/1/2021 | \$203,362 |
| Drainage Improvements MP 55.8 - 62.0 AS Line | | | | |
| C.EN.101842.0088 DRAN NED AS LN-DRAIN IMPRV-MP55.8-62.0 | Units not applicable | 10/1/2020 | 10/7/2020 | \$19,990 |
| Embankment Stabilization MP 59.5 AS Line | | | | |
| C.EN.101842.0214 DRAN AS 59.5 EMBANKMENT STABILIZATION - TK | Units not applicable | 5/3/2021 | 7/13/2022 | \$46,715 |
| C.EN.101842.0210 DRAN MP59.5-EMBANKMENT STAB FINAL DSN | Units not applicable | 2/3/2020 | 2/3/2021 | \$183,132 |
| Insulated Joint Removal MP 1.5 - 62.0 AS Line | | | | |
| C.EN.101842.0102 RAIL NED INSULATE JT AS LN MP1.5-62.0 | Units not applicable | 10/1/2020 | 9/30/2021 | \$138,204 |
| Interlocking Steel MP 1.5 - 62.0 AS Line | | | | |
| C.EN.101842.0110 TURN NED I/L STEEL AS LN MP1.5-62.0 | Units not applicable | 10/1/2020 | 9/30/2021 | \$482,088 |
| Joint Elimination MP 1.5 - 62.0 AB Line | | | | |
| C.EN.101842.0104 RAIL NED JOINT ELIM AS LN MP1.5-62.0 | Units not applicable | 10/1/2020 | 9/30/2021 | \$518,362 |
| Wood Tie/Timber Replacement MP 1.5 - 62.0 AS Line | | | | |
| C.EN.101842.0108 TIES NED TIE/TIMB AS LN MP1.5-62.0 | Units not applicable | 10/1/2020 | 9/30/2021 | \$844,978 |
| PG00064 - Rail Grinding - C.EN.101794 | | | | |
| Grind 1,045 miles along the NEC in FY21. | | | | |
| Rail Grinding MP 1.57 - 61.65 AS Line | | | | |
| XXX9 AS LN MP 1.57 - MP 61.65 | Units not applicable | 9/8/2021 | 10/12/2021 | \$401,645 |
| PG00071 - Production Wood Tie/Timber Replacement - C.EN.101858 | | | | |
| See below for further detail on planned FY21 work. | | | | |
| Springfield Line Wood Tie Replacement | | | | |
| C.EN.101858.2021.20 TIE/TIMBER REPLACEMENT - AS LN | 45500 EA Install Ties and Timbers | 8/5/2021 | 9/30/2021 | \$10,427,889 |

BCC Segment 25 Programs Total

\$22,496,451

Projects

| Investment Description and FY21 Scope | Start Date | End Date | FY21 Budget |
|--|-------------------------|-------------------|-------------|
| BCC Eligible | | | |
| P000046 - Spring (Springfield, MA) Interlocking Renewal - C.EN.101777 | | | |
| Procure design contractor and progress signal design, order long lead material for C&S and track, and pursue const | truction access agreeme | ent with CSXT. | |
| C&S - Design Division | 10/1/2020 | 4/30/2021 | \$14,300 |
| C&S - Design Philly | 10/1/2020 | 4/30/2021 | \$14,300 |
| C.EN.101777.0020 INT SPRING I/L EXPANSION RENEW-C&S DSN | 6/1/2021 | 12/30/2021 | \$432,214 |
| C.EN.101777.0022 TURN SPRING I/L EXPANSION RENEW-F/A SUPP | 6/1/2021 | 8/2/2022 | \$9,381 |
| C.EN.101777.0023 INRL SPRING I/L EXP RENEW - AMTRAK TK/CS DSGN | 5/3/2021 | 5/3/2021 | \$3,039 |
| C.EN.101777.0070 TURN SPRING I/L EXPANSION RENEW-PM | 10/1/2020 | 2/25/2022 | \$34,411 |
| TK - Design Division | 10/1/2020 | 4/30/2021 | \$14,300 |
| TK - Design Philly | 10/1/2020 | 4/30/2021 | \$14,300 |
| | BCC Segment | 25 Projects Total | \$536,247 |

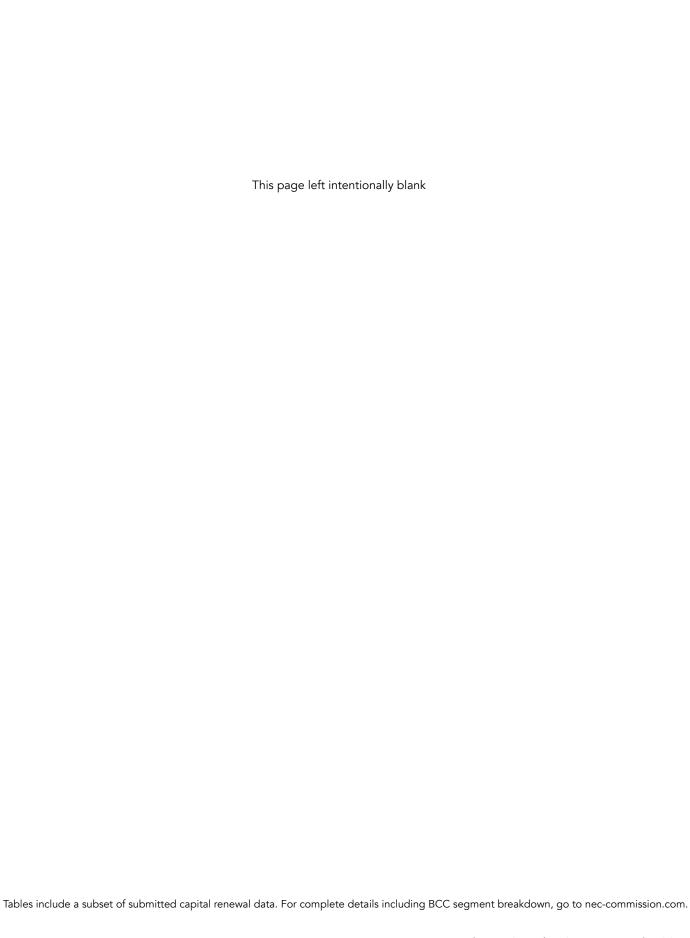

BCC Segment 27: Spuyten Duyvil to Penn Station New York (Amtrak-owned)

Operators: Amtrak

Investment Type BCC Eligible BCC Ineligible Segment Total Programs \$3,403,460 \$0 \$3,403,460 Projects \$5,858,086 \$0 \$5,858,086 Total \$9,261,546 \$0 \$9,261,546

Programs


| Investment Description and FY21 Scope | Units | Start Date | End Date | FY21 Budget |
|---|---------------------------------|------------|-----------|-------------|
| BCC Eligible | | | | |
| PG00039 - New York Facilities - C.EN.101845 | | | | |
| See below for further detail on planned FY21 work. | | | | |
| Empire Tunnel Emergency Access Signal Upgrades | | | | |
| C.EN.101845.HD.0000008 TUN NYD EMPIRE EMERGENCY ACCESS SIGNAGE UPGRADES | Units not applicable | 10/1/2020 | 3/31/2021 | \$20,207 |
| PG00041 - New York Signals - C.EN.101846 | | | | |
| See below for further detail on planned FY21 work. | | | | |
| Empire Interlocking RTU Upgrades | | | | |
| C.EN.101846.HD.0000254-PH INT NYD EMPIRE I/L RTU UPGRADE | Units not applicable | 10/1/2020 | 9/30/2021 | \$150,667 |
| Transponder Replacement | | | | |
| C.EN.101846.0013 INT NYD-WIU/TRANSPONDER REPLACEMENT | Units not applicable | 10/1/2020 | 9/30/2021 | \$37,259 |
| PG00042 - New York Structures - C.EN.101847 | | | | |
| See below for further detail on planned FY21 work. | | | | |
| Empire Line Tunnel Improvements - Project Management | | | | |
| C.EN.101847.0062 TUN EMPIRE LN REHAB TUN IMPROVEMENTS-PM | Units not applicable | 10/1/2020 | 9/30/2021 | \$16,086 |
| Empire Tunnel - Egress Fence/Door Replacement | | | | |
| C.EN.101847.0060 TUN EMPIRE LN-EGRESS FENCE/DOORS RPL | Units not applicable | 10/1/2020 | 9/30/2021 | \$158,812 |
| Empire Tunnel Standpipe Commissioning | | | | |
| C.EN.101847.0059 TUN EMPIRE LN-STANDPIPE COMMISSIONING | Units not applicable | 10/1/2020 | 9/30/2021 | \$82,367 |
| Empire Tunnel Airlines Replacement | | | | |
| C.EN.101847.0092 TUN EMPIRE TUNNEL-AIRLINES REPLACE | Units not applicable | 10/1/2020 | 9/30/2021 | \$97,402 |
| Empire Tunnel Leak Mitigation | | | | |
| C.EN.101847.0091 TUN EMPIRE TUNNEL-LEAK MITIGATION | Units not applicable | 4/1/2021 | 7/30/2021 | \$144,483 |
| Empire Tunnel Line Overbuild Remote SCADA | | | | |
| C.EN.101847.0058 TUN EMPIRE LN-OVERBUILD REMOTE SCADA | Units not applicable | 10/1/2020 | 9/30/2021 | \$214,479 |
| Harlem River Bridge Fall Protection MP 10.24 AN Line | | | | |
| C.EN.101847.0017 BGMS NY10.24 HARLEM RIVER-FALL PROTECT | Units not applicable | 6/1/2021 | 7/30/2021 | \$93,699 |
| PG00044 - New York Track - C.EN.101849 | | | | |
| See below for further detail on planned FY21 work. | | | | |
| Concrete Tie Replacement, AE Line, MP 10.8 | | | | |
| C.EN.101849.0079 TIES NYD CONCRETE AE LINE PSNY-10.8 | 87 EA Install Ties, Concrete | 10/1/2020 | 9/30/2021 | \$143,693 |
| Drainage Improvements, AE Line, MP 10.8 | | | | |
| C.EN.101849.0103 DRAN NYD DRAINGE IMPV AE LN PSNY-10.8 | Units not applicable | 10/1/2020 | 9/30/2021 | \$2,188 |

| Investment Description and FY21 Scope | Units | Start Date | End Date | FY21 Budget |
|--|---|----------------|----------------|-------------|
| Drainage Improvements, AN Line, MP 0.1-11.0 | | | | |
| C.EN.101849.0104 DRAN NYD DRAIN IMPV AN LN MPW0.1-11.0 | Units not applicable | 10/1/2020 | 9/30/2021 | \$1,267,619 |
| High Speed Surfacing MP 10.8 AE Line | | | | |
| C.EN.101849.0111 GEOM NYD HSS SURFAC AE LN MP PSNY-10.8 | 3000 PF Surface Track, Spot | 10/1/2020 | 9/30/2021 | \$33,700 |
| Insulated Joint Removal, MP 10.8, AE Line | | | | |
| C.EN.101849.0017 RAIL NYD INSULATED JT AE LN MP PSNY-10.8 | 6 EA Install Insulated Joint (Includes OTM) | 10/1/2020 | 9/30/2021 | \$46,362 |
| Joint Elimination PSNY - MP 10.8 | | | | |
| NYD TK - Interlocking Steel Upgrades | Units not applicable | 10/1/2020 | 9/30/2021 | \$250,357 |
| Spot Rail Replacement PSNY - MP 10.8 AE Line | | | | |
| C.EN.101849.0051 RAIL NYD SPOT RAIL RPL AE LN PSNY-10.8 | 200 FT Install Rail, Bolted (Includes OTM) | 10/1/2020 | 9/30/2021 | \$32,178 |
| Spot Surface, AE LN, MP 10.8 | | | | |
| C.EN.101849.0004 GEOM NYD SPOT SURFACE AE LN MP PSNY-10.8 | 7000 PF Surface Track, Spot | 10/1/2020 | 9/30/2021 | \$142,381 |
| Wood Tie/Timber Replacement PSNY - MP 10.8 AE Line | | | | |
| NYD Tie Replacement | 330 EA Install Ties and Timbers | 10/1/2020 | 9/30/2021 | \$324,309 |
| PG00064 - Rail Grinding - C.EN.101794 | | | | |
| Grind 1,045 miles along the NEC in FY21. | | | | |
| Rail Grinding MP .2 - 11 AE Line | | | | |
| XXX8 AE LN MP 0.2 - MP 11 | Units not applicable | 11/12/2020 | 11/24/2020 | \$135,993 |
| PG00090-RBED System Geotech Hazard Inventory & Assessment-C.EN.101908 | | | | |
| Geotech surveys of Harrisburg line, West side/empire connection, Empire Line, and Shorel | ine. | | | |
| Roadbed System Geotech Hazard Inventory & Assessment - AE Line, West Side/Em | pire Connection | | | |
| RBED System Geotech Hazard Inventory & Assessment - AE LN, WEST SIDE/EMPIRE CONNECTION | Units not applicable | 3/3/2021 | 3/3/2021 | \$9,218 |
| | | BCC Segment 27 | Programs Total | \$3,403,460 |

Projects

| Investment Description and FY21 Scope | Start Date | End Date | FY21 Budget |
|---|------------|-----------|-------------|
| BCC Eligible | | | |
| P000049 - Spuyten Duyvil Fenders System Upgrades - C.EN.101791 | | | |
| Continue construction; complete steel fabrication shopdrawings; fabrication of steel fender system. | | | |
| C.EN.101791.4101 BGMS SPUYTEN DUYVIL FENDER UPG-CS | 11/2/2020 | 1/31/2022 | \$5,222,169 |
| C.EN.101791.4201 BGMS SPUYTEN DUYVIL FENDER UPG-TRACK | 9/1/2021 | 1/31/2022 | \$33,110 |
| C.EN.101791.4301 BGMS SPUYTEN DUYVIL FENDER UPG-C&S | 9/1/2021 | 1/31/2022 | \$18,170 |
| C.EN.101791.5101 BGMS SPUYTEN DUYVIL FENDER UPG-CM | 7/1/2021 | 1/31/2022 | \$156,282 |

| Investment Description and FY21 Scope | Start Date | End Date | FY21 Budget |
|--|------------|---------------------|-------------|
| C.EN.101791.5201 BGMS SPUYTEN DUYVIL FENDER UPG-CPS | 10/1/2020 | 1/31/2022 | \$230,864 |
| C.EN.101791.7101 BGMS SPUYTEN DUYVIL FENDER UPG-PM | 9/3/2019 | 7/1/2021 | \$73,684 |
| C.EN.101791.7201 BGMS SPUYTEN DUYVIL FENDER UPG-PROJ SUPP | 8/3/2020 | 4/29/2022 | \$15,854 |
| P000136 - Empire Line Lighting Upgrade - C.EN.100732 | | | |
| Advance the design of tunnel egress, complete design and start procurement for construction. | | | |
| C.EN.100732.0003 SAFE EMPIRE LN-LITE IMPROVEMENT DSN | 3/1/2018 | 3/31/2020 | \$10,713 |
| C.EN.100732.5101 SAFE EMPIRE LN LITE IMPROVE-CM | 2/3/2020 | 12/30/2022 | \$2,948 |
| C.EN.100732.5201 SAFE EMPIRE LN LITE IMPROVE-CPS | 6/16/2021 | 11/1/2022 | \$46,124 |
| C.EN.100732.7101 SAFE EMPIRE LN LITE IMPROVE-PM | 10/1/2020 | 1/31/2023 | \$39,056 |
| C.EN.100732.7201-PH SAFE EMPIRE LN PROJECT SUPPORT | 10/1/2020 | 4/7/2022 | \$9,112 |
| C.EN.101791.7101 BGMS SPUYTEN DUYVIL FENDER UPG-PM | 9/3/2019 | 7/1/2021 | \$73,684 |
| C.EN.101791.7201 BGMS SPUYTEN DUYVIL FENDER UPG-PROJ SUPP | 8/3/2020 | 4/29/2022 | \$15,854 |
| | BCC Segmen | t 27 Projects Total | \$5,858,086 |

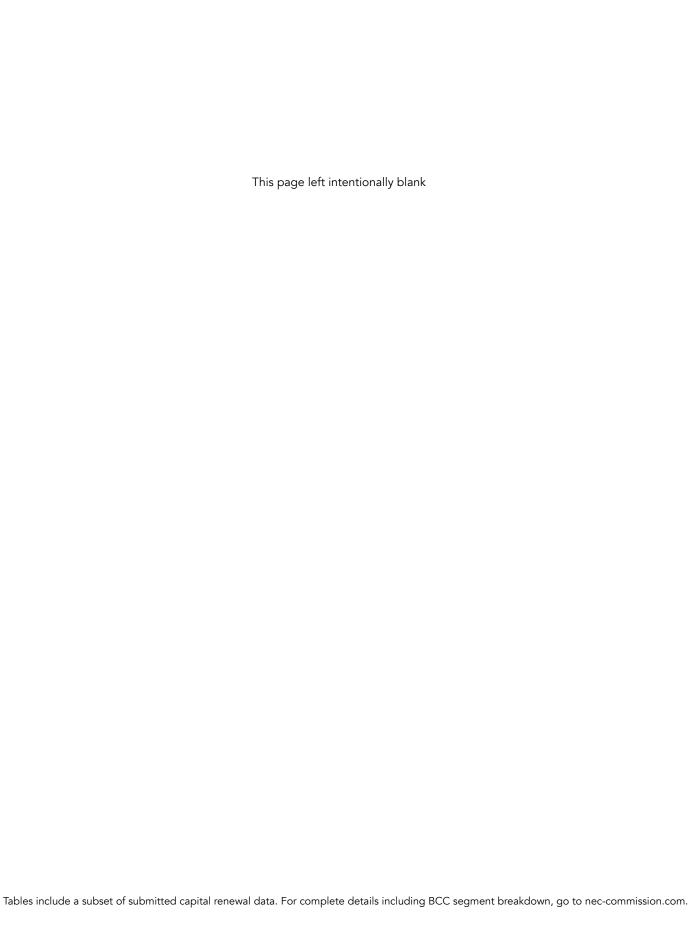

BCC Segment 28: Penn to 36th Street (Amtrak-owned)

 Investment Type
 BCC Eligible
 BCC Ineligible
 Segment Total

 Programs
 \$148,583
 \$0
 \$148,583


 Projects
 \$0
 \$0
 \$0

 Total
 \$148,583
 \$0
 \$148,583

Operators: Amtrak

Programs

| Investment Description and FY21 Scope | Units | Start Date | End Date | FY21 Budget |
|--|----------------------|----------------|----------------|-------------|
| BCC Eligible | | | | |
| PG00019 - Mid-Atlantic North Substations - C.EN.101827 | | | | |
| See below for further detail on planned FY21 work. | | | | |
| North Philadelphia Sub 6 RTU Upgrade AH Line | | | | |
| North Phila Sub 6 RTU Upgrade | Units not applicable | 10/1/2020 | 9/30/2021 | \$148,583 |
| | | BCC Segment 28 | Programs Total | \$148,583 |



BCC Segment 29: 36th Street to

Operators: Amtrak, SEPTA

Thorndale (Amtrak-owned)

| Investment Type | BCC Eligible | BCC Ineligible | Segment Total |
|-----------------|--------------|----------------|---------------|
| Programs | \$25,869,770 | | \$25,869,770 |
| Projects | \$2,447,335 | \$232,901 | \$2,680,235 |
| Total | \$28,317,105 | \$232,901 | \$28,550,005 |

Programs

| Investment Description and FY21 Scope | Units | Start Date | End Date | FY21 Budget |
|--|--|------------|------------|-------------|
| BCC Eligible | | | | |
| PG00013 - Mid-Atlantic North Catenary - C.EN.101822 | | | | |
| See below for further detail on planned FY21 work. | | | | |
| Thorndale Contact Wire Replacement AH Line | | | | |
| Thorndale Contact wire replacement | Units not applicable | 10/1/2020 | 9/30/2021 | \$311,026 |
| PG00017 - Mid-Atlantic North Signals - C.EN.101825 | | | | |
| See below for further detail on planned FY21 work. | | | | |
| High Signal Replacement MP 2.3 - 19.9 AH Line | | | | |
| INT HIGH SIGNAL REPLACEMENT AH LN (2.3 - 19.9) | Units not applicable | 10/1/2020 | 9/30/2021 | \$536,204 |
| Overbrook Interlocking to Bryn Mawr Interlocking ABS Cable Renewal AH Lir | ne | | | |
| ABS OVERBROOK I/L MP05.4 TO BRYN MAWR I/L MP10.0 -CABL RNWL | Units not applicable | 10/1/2020 | 9/30/2021 | \$1,196,811 |
| PG00018 - Mid-Atlantic North Structures - C.EN.101826 | | | | |
| See below for further detail on planned FY21 work. | | | | |
| Chamounix Road Undergrade Bridge Rehab MP 13.80 AH Line | | | | |
| BGUG AH LN MP013.80 CHAMOUNIX RD ST DAVIDS PA REHAB | 1 EA Undergrade Bridge Upgrade | 10/1/2020 | 9/30/2021 | \$321,720 |
| PG00019 - Mid-Atlantic North Substations - C.EN.101827 | | | | |
| See below for further detail on planned FY21 work. | | | | |
| Paoli Sub 12KV Switches AH Line | | | | |
| Paoli Sub 4 12KV Switches | Units not applicable | 10/1/2020 | 9/30/2021 | \$625,398 |
| Paoli Sub 4 RTU Upgrade AH Line | | | | |
| Paoli Sub 4 RTU Upgrade | Units not applicable | 10/1/2020 | 9/30/2021 | \$148,583 |
| Zoo Sub 9 Signal Machine Replacement AH Line | | | | |
| SIGP SUB#09 ZOO -SIGNAL MACHINE REPL | 1 EA Install / Renew Frequency Converter | 10/1/2020 | 9/30/2021 | \$1,111,813 |
| PG00020 - Mid-Atlantic North Track - C.EN.101828 | | | | |
| Replace 40 insulated joints, 260 joint eliminations, 260,000 LF spot surfacing upgrace replacements, and 100 concrete tie replacements. The program will also complete a Track forces whenever possible. | | | | |
| AH LN MP 20.2-35.3 | | | | |
| AH LN MP 20.2-35.3 | Units not applicable | 4/1/2021 | 4/14/2021 | \$2,135 |
| Concrete Tie Replacement MP 1.9 - 20.2 AH Line | | | | |
| C.EN.101828.0028 TIES MAD TIE/TIMBER AH LN MP1.9-20.2 | 100 EA Install Ties and Timbers | 10/1/2020 | 10/27/2020 | \$115,095 |
| Concrete Tie Replacement MP 20.2 - 35.3 AH Line | | | | |

| Investment Description and FY21 Scope | Units | Start Date | End Date | FY21 Budget |
|--|---|------------|------------|-------------|
| C.EN.101828.0029 TIES MAD TIE/TIMBER AH LN MP20.2-35.3 | 180 EA Install Ties and Timbers | 11/2/2020 | 12/4/2020 | \$207,173 |
| High Speed Surfacing MP 1.9 - 20.2 AH Line | | | | |
| C.EN.101828.FY2180 GEOM MADN HSS SURFACE AH LN MP1.9-20.2 | 5000 PF Surface Track, Spot | 11/2/2020 | 8/30/2021 | \$56,103 |
| High Speed Surfacing MP 20.2 - 35.3 AH Line | | | | |
| C.EN.101828.FY2181 GEOM MADN HSS SURFACE AH LN MP20.2-35.3 | 5000 PF Surface Track, High Speed | 11/2/2020 | 8/30/2021 | \$56,103 |
| Insulated Joint Removal MP 1.9 - 20.2 AH Line | | | | |
| C.EN.101828.FY2101 RAIL MADN INSULATE JT AH LN MP 1.9-20.2 | 2 EA Install Insulated Joint (Includes OTM) | 10/1/2020 | 9/24/2021 | \$183,442 |
| Insulated Joint Removal MP 20.2 - 35.3 AH Line | | | | |
| C.EN.101828.FY2102 RAIL MADN INSULATE JT AH LN MP 20.2-35.3 | 1 EA Install Insulated Joint (Includes OTM) | 3/30/2021 | 4/27/2021 | \$10,202 |
| Interlocking Steel MP 1.9 - 20.2 AH Line | | | | |
| C.EN.101828.FY2148 TURN MADN I/L STEEL AH MP1.9-20.2 | 2 EA Renew Switch Point Stock Rail | 10/1/2020 | 10/8/2020 | \$37,325 |
| Interlocking Steel MP 20.2 - 35.3 AH Line | | | | |
| C.EN.101828.FY2149 TURN MADN I/L STEEL AH MP20.2-35.3 | 2 EA Renew Switch Point Stock Rail | 11/2/2020 | 11/9/2020 | \$37,325 |
| Joint Elimination MP 1.9 - 20.2 AH Line | | | | |
| C.EN.101828.0011 RAIL MADN JOINT ELIM AH LINE MP1.9-20.2 | 60 EA Field Weld and Grind Rail (Joint Elimination) | 10/1/2020 | 1/11/2021 | \$674,358 |
| Joint Elimination MP 20.2 - 35.3 AH Line | | | | |
| C.EN.101828.0012 RAIL MADN JOINT ELIM AH LINE MP20.2-35.3 | 10 EA Field Weld and Grind Rail (Joint Elimination) | 1/11/2021 | 2/10/2021 | \$112,393 |
| Roadbed Stabilization MP 26.5 AH Line | | | | |
| C.EN.101828.FY2173 AH-26.5 ROADBED STABILIZATION | Units not applicable | 11/9/2020 | 11/17/2020 | \$23,276 |
| Spot Surfacing MP 1.9 - 20.2 AH Line | | | | |
| C.EN.101828.FY2138 GEOM AH LN MP 1.9 - 20.2 SPOT SURFACING | 30000 PF Surface Track, Spot | 10/1/2020 | 9/28/2021 | \$415,976 |
| Spot Surfacing MP 20.2 - 35.3 AH Line | | | | |
| C.EN.101828.FY2139 GEOM AH LN MP 20.2 - 35.3 SPOT SURFACING | 70000 PF Surface Track, Spot | 10/1/2020 | 9/28/2021 | \$970,612 |
| Spot Undercutting MP 1.9 - 20.2 AH Line | | | | |
| C.EN.101828.FY2159 BLST MAD SPOT UNDRCUT AH LN MP1.9-20.2 | 1000 FT Vacuum Train, Spot Undercut | 10/1/2020 | 10/8/2020 | \$331,377 |
| Spot Undercutting MP 20.2 - 35.3 AH Line | | | | |
| C.EN.101828.FY2160 BLST MAD SPOT UNDRCUT AH LN MP20.2-35.3 | 2000 FT Vacuum Train, Spot Undercut | 11/2/2020 | 11/9/2020 | \$662,753 |
| PG00060 - Production High Speed Surfacing - C.EN.101855 | | | | |
| 300 Miles Surfaced by PROD HSS | | | | |
| High Speed Surfacing Production MP 20.2 - 35.3 AH Line | | | | |
| C.EN.101855.0067 GEOM AH LN MP 20.2 - 35.3 HSS PRODUCTION - 29 | Units not applicable | 10/1/2020 | 9/30/2021 | \$672,677 |
| PG00064 - Rail Grinding - C.EN.101794 | | | | |
| Grind 1,045 miles along the NEC in FY21. | | | | |
| | | | | |

| Investment Description and FY21 Scope | Units | Start Date | End Date | FY21 Budget |
|---|--------------------------------|------------|------------|-------------|
| Rail Grinding MP 1.9 - 20.2 AH Line | | | | |
| XXX4 AH LN MP 1.9 - 20.2 | Units not applicable | 3/25/2021 | 5/17/2021 | \$803,290 |
| Rail Grinding MP 20.2 - 35.3 AH Line | | | | |
| XXX5 AH LN MP 20.2 - 35.3 | Units not applicable | 5/11/2021 | 6/8/2021 | \$455,197 |
| PG00065 - Turnout Renewal - C.EN.101860 | | | | |
| See below for further detail on planned FY21 work. | | | | |
| Overbrook Interlocking #13 Crossover | | | | |
| C.EN.101860.0055 TURN OVERBROOK I/L #13 X/O - INSTALL | 2 EA Install Wood Turnout | 10/9/2020 | 10/12/2020 | \$782,378 |
| C.EN.101860.0056 TURN OVERBROOK I/L #13 X/O - T&E SUPPORT | Units not applicable | 10/9/2020 | 10/19/2020 | \$89,764 |
| C.EN.101860.0057 TURN OVERBROOK I/L #13 X/O - B&B SUPPORT | Units not applicable | 10/9/2020 | 10/19/2020 | \$58,705 |
| C.EN.101860.0058 TURN OVERBROOK I/L #13 X/O - C&S SUPPORT | 4 EA Install Switch Machine | 10/9/2020 | 10/19/2020 | \$347,710 |
| C.EN.101860.0059 TURN OVERBROOK I/L #13 X/O - E.T SUPPORT | Units not applicable | 10/9/2020 | 10/19/2020 | \$19,867 |
| Overbrook Interlocking #15 Crossover | | | | |
| C.EN.101860.0050 TURN OVERBROOK I/L #15 X/O - INSTALL | 2 EA Install Wood Turnout | 10/9/2020 | 10/12/2020 | \$782,378 |
| C.EN.101860.0051 TURN OVERBROOK I/L #15 X/O - T&E SUPPORT | Units not applicable | 10/9/2020 | 10/19/2020 | \$89,764 |
| C.EN.101860.0052 TURN OVERBROOK I/L #15 X/O - B&B SUPPORT | Units not applicable | 10/9/2020 | 10/19/2020 | \$58,705 |
| C.EN.101860.0053 TURN OVERBROOK I/L #15 X/O - C&S SUPPORT | 4 EA Install Switch Machine | 10/9/2020 | 10/19/2020 | \$374,520 |
| C.EN.101860.0054 TURN OVERBROOK I/L #15 X/O - E.T SUPPORT | Units not applicable | 10/9/2020 | 10/19/2020 | \$19,867 |
| Paoli Interlocking #11 Turnout | | | | |
| C.EN.101860.0036TURN - PAOLI #11 T/O - REMOVAL | Units not applicable | 5/21/2021 | 6/10/2021 | \$253,525 |
| Paoli Interlocking #15 Crossover | | | | |
| C.EN.101860.0001 TURN - PAOLI #15 X/O - INSTALL | 2 EA Install Wood Turnout | 6/11/2021 | 7/15/2021 | \$1,327,852 |
| C.EN.101860.0002 TURN - PAOLI #15 X/O - ET SUPPORT | Units not applicable | 6/11/2021 | 7/15/2021 | \$14,821 |
| C.EN.101860.0003 TURN - PAOLI #15 X/O - T&E SUPPORT | Units not applicable | 6/11/2021 | 7/15/2021 | \$35,790 |
| C.EN.101860.0004 TURN - PAOLI #15 X/O - B&B SUPPORT | Units not applicable | 6/11/2021 | 7/15/2021 | \$29,850 |
| C.EN.101860.0005 TURN - PAOLI #15 X/O - C&S SUPPORT | 2 EA Install Switch Machine | 6/11/2021 | 7/15/2021 | \$371,338 |
| Paoli Interlocking #17A Crossover | | | | |
| C.EN.101860.0011 TURN - PAOLI #17 A X/O - INSTALL | 1 EA Install Wood Turnout | 6/11/2021 | 7/15/2021 | \$727,112 |
| C.EN.101860.0012 TURN - PAOLI #17 A X/O - ET SUPPORT | Units not applicable | 6/11/2021 | 7/15/2021 | \$14,821 |
| C.EN.101860.0013 TURN - PAOLI #17 A X/O - T&E SUPPORT | Units not applicable | 6/11/2021 | 7/15/2021 | \$35,790 |
| C.EN.101860.0014 TURN - PAOLI #17 A X/O - B&B SUPPORT | Units not applicable | 6/11/2021 | 7/15/2021 | \$29,850 |
| C.EN.101860.0015 TURN - PAOLI #17 A X/O - C&S SUPPORT | 1 EA Install Switch Machine | 6/11/2021 | 7/15/2021 | \$371,338 |
| Paoli Interlocking #17B Turnout | | | | |
| C.EN.101860.0036TURN - PAOLI #17B T/O - REMOVAL | Units not applicable | 5/21/2021 | 6/10/2021 | \$253,525 |
| Paoli Interlocking #3 Turnout | | | | |
| C.EN.101860.0036TURN - PAOLI #3 T/O - REMOVAL | Units not applicable | 5/21/2021 | 6/10/2021 | \$253,525 |

| nvestment Description and FY21 Scope | Units | Start Date | End Date | FY21 Budget |
|--|--------------------------------|------------|------------|-------------|
| Paoli Interlocking #5 Crossover | | | | |
| C.EN.101860.0006 TURN - PAOLI #5 X/O - INSTALL | 2 EA Install Wood Turnout | 6/11/2021 | 7/15/2021 | \$1,059,080 |
| C.EN.101860.0007 TURN - PAOLI #5 X/O - ET SUPPORT | Units not applicable | 6/11/2021 | 7/15/2021 | \$14,821 |
| C.EN.101860.0008 TURN - PAOLI #5 X/O - T&E SUPPORT | Units not applicable | 6/11/2021 | 7/15/2021 | \$35,790 |
| C.EN.101860.0009 TURN - PAOLI #5 X/O - B&B SUPPORT | Units not applicable | 6/11/2021 | 7/15/2021 | \$29,850 |
| C.EN.101860.0010 TURN - PAOLI #5 X/O - C&S SUPPORT | 4 EA Install Switch Machine | 6/11/2021 | 7/15/2021 | \$371,338 |
| Stiles Interlocking #42 Crossover | | | | |
| C.EN.101860.0095 TURN - STILES #42 X/O - INSTALL | 2 EA Install Wood Turnout | 12/1/2020 | 11/30/2020 | \$1,327,853 |
| C.EN.101860.0096 TURN - STILES #42 X/O - ET SUPPORT | Units not applicable | 12/1/2020 | 12/14/2020 | \$14,821 |
| C.EN.101860.0097 TURN - STILES #42 X/O - T&E SUPPORT | Units not applicable | 12/1/2020 | 12/14/2020 | \$35,790 |
| C.EN.101860.0098 TURN - STILES #42 X/O - B&B SUPPORT | Units not applicable | 12/1/2020 | 12/14/2020 | \$29,850 |
| C.EN.101860.0099 TURN - STILES #42 X/O - C&S SUPPORT | 4 EA Install Switch Machine | 12/1/2020 | 12/14/2020 | \$199,151 |
| Thorn Interlocking #45B Turnout | | | | |
| C.EN.101860.0036TURN - THORN #45 B T/O - INSTALL | 1 EA Install Wood Turnout | 9/17/2021 | 11/18/2021 | \$376,715 |
| C.EN.101860.0037TURN - THORN #45 B T/O - ET SUPPORT | Units not applicable | 9/17/2021 | 11/18/2021 | \$3,929 |
| C.EN.101860.0038TURN - THORN #45 B T/O - T&E SUPPORT | Units not applicable | 9/17/2021 | 11/18/2021 | \$6,272 |
| C.EN.101860.0039TURN - THORN #45 B T/O - B&B SUPPORT | Units not applicable | 9/17/2021 | 11/18/2021 | \$2,262 |
| C.EN.101860.0040TURN - THORN #45 B T/O - C&S SUPPORT | 1 EA Install Switch Machine | 9/17/2021 | 11/18/2021 | \$24,781 |
| Thorn Interlocking #47 Crossover | | | | |
| C.EN.101860.0001 TURN - THORN #47 X/O - INSTALL | 2 EA Install Wood Turnout | 9/17/2021 | 11/18/2021 | \$548,625 |
| C.EN.101860.0002 TURN - THORN #47 X/O - ET SUPPORT | Units not applicable | 9/17/2021 | 11/18/2021 | \$3,368 |
| C.EN.101860.0003 TURN - THORN #47 X/O - T&E SUPPORT | Units not applicable | 9/17/2021 | 11/18/2021 | \$8,134 |
| C.EN.101860.0004 TURN - THORN #47 X/O - B&B SUPPORT | Units not applicable | 9/17/2021 | 11/18/2021 | \$6,784 |
| C.EN.101860.0005 TURN - THORN #47 X/O - C&S SUPPORT | 4 EA Install Switch Machine | 9/17/2021 | 11/18/2021 | \$84,450 |
| Thorn Interlocking #49 Crossover | | | | |
| C.EN.101860.0001 TURN - THORN #49 X/O - INSTALL | 2 EA Install Wood Turnout | 9/17/2021 | 11/18/2021 | \$549,516 |
| C.EN.101860.0002 TURN - THORN #49 X/O - ET SUPPORT | Units not applicable | 9/17/2021 | 11/18/2021 | \$3,368 |
| C.EN.101860.0003 TURN - THORN #49 X/O - T&E SUPPORT | Units not applicable | 9/17/2021 | 11/18/2021 | \$8,134 |
| C.EN.101860.0004 TURN - THORN #49 X/O - B&B SUPPORT | Units not applicable | 9/17/2021 | 11/18/2021 | \$6,784 |
| C.EN.101860.0005 TURN - THORN #49 X/O - C&S SUPPORT | 2 EA Install Switch Machine | 9/17/2021 | 11/18/2021 | \$84,395 |
| Thorn Interlocking #51 Crossover | | | | |
| C.EN.101860.0001 TURN - THORN #51 X/O - INSTALL | 2 EA Install Wood Turnout | 9/17/2021 | 11/18/2021 | \$512,097 |
| C.EN.101860.0002 TURN - THORN #51 X/O - ET SUPPORT | Units not applicable | 9/17/2021 | 11/18/2021 | \$3,368 |
| | | | | ¢0.404 |
| C.EN.101860.0003 TURN - THORN #51 X/O - T&E SUPPORT | Units not applicable | 9/17/2021 | 11/18/2021 | \$8,134 |

| Investment Description and FY21 Scope | Units | Start Date | End Date | FY21 Budget |
|---|--|----------------|----------------|--------------|
| C.EN.101860.0005 TURN - THORN #51 X/O - C&S SUPPORT | 2 EA Install Switch Machine | 9/17/2021 | 11/18/2021 | \$84,395 |
| Thorn Interlocking #53 Crossover | | | | |
| C.EN.101860.0001 TURN - THORN #53 X/O - INSTALL | 2 EA Install Wood Turnout | 9/17/2021 | 11/18/2021 | \$519,583 |
| C.EN.101860.0002 TURN - THORN #53 X/O - ET SUPPORT | Units not applicable | 9/17/2021 | 11/18/2021 | \$3,368 |
| C.EN.101860.0003 TURN - THORN #53 X/O - T&E SUPPORT | Units not applicable | 9/17/2021 | 11/18/2021 | \$8,134 |
| C.EN.101860.0004 TURN - THORN #53 X/O - B&B SUPPORT | Units not applicable | 9/17/2021 | 11/18/2021 | \$6,784 |
| C.EN.101860.0005 TURN - THORN #53 X/O - C&S SUPPORT | 2 EA Install Switch Machine | 9/17/2021 | 11/18/2021 | \$84,395 |
| Thorn Interlocking #55A Turnout | | | | |
| C.EN.101860.0036TURN - THORN #55 A T/O - INSTALL | 1 EA Install Wood Turnout | 9/17/2021 | 11/18/2021 | \$376,715 |
| C.EN.101860.0037TURN - THORN #55 A T/O - ET SUPPORT | Units not applicable | 9/17/2021 | 11/18/2021 | \$3,929 |
| C.EN.101860.0038TURN - THORN #55 A T/O - T&E SUPPORT | Units not applicable | 9/17/2021 | 11/18/2021 | \$6,272 |
| C.EN.101860.0039TURN - THORN #55 A T/O - B&B SUPPORT | Units not applicable | 9/17/2021 | 11/18/2021 | \$2,262 |
| C.EN.101860.0040TURN - THORN #55 A T/O - C&S SUPPORT | 1 EA Install Switch Machine | 9/17/2021 | 11/18/2021 | \$24,781 |
| Valley Interlocking #63 Turnout | | | | |
| C.EN.101860 TURN VALLEY #63 T/O - INSTALL | 1 EA Install Wood Turnout / 1 EA Install Switch Machine | 7/16/2021 | 7/29/2021 | \$692,817 |
| Zoo JO Interlocking #143 Crossover | | | | |
| C.EN.101860.0060 TURN "JO" ZOO I/L #143 X/O - INSTALL | 1 EA Install Wood Turnout | 11/3/2020 | 11/17/2020 | \$1,820,894 |
| C.EN.101860.0061 TURN "JO" ZOO I/L #143 X/O - E.T SUPPORT | Units not applicable | 11/6/2020 | 11/16/2020 | \$56,821 |
| C.EN.101860.0062 TURN "JO" ZOO I/L #143 X/O - T&E SUPPORT | Units not applicable | 11/6/2020 | 11/16/2020 | \$89,764 |
| C.EN.101860.0063 TURN "JO" ZOO I/L #143 X/O - B&B SUPPORT | Units not applicable | 11/6/2020 | 11/16/2020 | \$46,964 |
| C.EN.101860.0064 TURN "JO" ZOO I/L #143 X/O - C&S SUPPORT | 1 EA Install Switch Machine | 11/6/2020 | 11/16/2020 | \$254,484 |
| | | BCC Segment 29 | Programs Total | \$25,869,770 |

Projects

| Investment Description and FY21 Scope | Start Date | End Date | FY21 Budget |
|--|-------------------------|----------------------|-------------------------|
| BCC Eligible | | | |
| P000090 - Zoo to Paoli Catenary Structure Upgrade - C.EN.201264 | | | |
| FY21 Scope not available. | | | |
| C.EN.201264.0015 POLE ZOO-PAOLI CAT PROJECT MANAGEMENT | 10/1/2020 | 10/27/2026 | \$25,740 |
| Frequency Converter - Bryn Mawr | 10/1/2020 | 9/30/2021 | \$778,562 |
| P000117 - Signal System Upgrades to 562 - Park to Paoli - C.EN.101770 | | | |
| Continue the design and construction of the ABS Signal System. Design progression from Paoli to Bryn Mawr. Switch and new track wires, and interlocking signals replacement, will continue from MP 33.7 to MP 25 (Glen). | ch and signal case repl | lacement with new sw | ritch and signal cables |
| FY21 C.EN.101770.0010 - ABS PAOLI/BRYN MAWR 562 - SIG SYS UPGS DSN | 10/1/2020 | 9/30/2021 | \$219,670 |

| Investment Description and FY21 Scope | Start Date | End Date | FY21 Budget |
|--|-------------|-------------------|-------------|
| FY21 C.EN.101770.0011 - ABS THORN I/L | 10/1/2020 | 9/30/2021 | \$1,423,362 |
| BCC Ineligible | | | |
| P000154 - Pennswood Bridge Catenary Improvements - C.EN.101892 | | | |
| Procure and award a design contract, develop the design and procure a construction contractor. | | | |
| C.EN.101892.0001 CAT PENNSWOOD RD PA9.81-E.T. CONSTRUCT | 6/18/2020 | 9/24/2021 | \$163,373 |
| C.EN.101892.0004 CAT PENNSWOOD RD PA9.81-PROJ. MGT. | 5/1/2020 | 9/30/2021 | \$66,459 |
| C.EN.101892.0005 CAT PENNSWOOD RD PA9.81-CONST. MGT. | 5/1/2020 | 11/18/2020 | \$3,069 |
| | BCC Segment | 29 Projects Total | \$2,680,235 |

BCC Segment 30: Thorndale to Harrisburg (Amtrak-owned)

Operators: Amtrak

Programs

| Investment Type | BCC Eligible | BCC Ineligible | Segment Total |
|-----------------|--------------|----------------|---------------|
| Programs | \$12,904,722 | \$0 | \$12,904,722 |
| Projects | \$4,092,214 | \$0 | \$4,092,214 |
| Total | \$16,996,936 | \$0 | \$16,996,936 |


| Investment Description and FY21 Scope | Units | Start Date | End Date | FY21 Budget |
|--|------------------------------------|------------|------------|-------------|
| BCC Eligible | | | | |
| PG00015 - Mid-Atlantic North Facilities - C.EN.101824 | | | | |
| See below for further detail on planned FY21 work. | | | | |
| Downingtown Yard Upgrade | | | | |
| C.EN.101824.0001 MOFW DOWNINGTOWN PA-YRD HQ UPGRADES | Units not applicable | 11/2/2020 | 9/29/2021 | \$156,226 |
| PG00017 - Mid-Atlantic North Signals - C.EN.101825 | | | | |
| See below for further detail on planned FY21 work. | | | | |
| Cork & Conestoga Switch Machine Renewal AH Line | | | | |
| INT AH LINE CORK MP68.1 & CONESTOGA MP67.7 – SW MACH RENW | 31 EA Install Switch Machine | 10/1/2020 | 9/30/2021 | \$1,225,303 |
| PG00018 - Mid-Atlantic North Structures - C.EN.101826 | | | | |
| See below for further detail on planned FY21 work. | | | | |
| Belmont Road Undergrade Bridge Rehab MP 55.94 AH Line | | | | |
| BGUG AH LN MP055.94 BELMONT RD LEAMAN PA REHAB | 1 EA Undergrade Bridge Upgrade | 10/1/2020 | 9/30/2021 | \$214,484 |
| Lenover Culvert Rehab MP 45.88 AH Line | | | | |
| CULV AH LN MP045.88 LENOVER PA REHAB | 1 EA Culvert Upgrade | 10/1/2020 | 9/30/2021 | \$214,484 |
| Oak Street Undergrade Bridge Rehab MP 42.40 AH Line | | | | |
| BGUG AH LN MP 042.40 OAK ST POMEROY PA REHAB | 1 EA Undergrade Bridge Upgrade | 10/1/2020 | 9/30/2021 | \$160,860 |
| PG00019 - Mid-Atlantic North Substations - C.EN.101827 | | | | |
| See below for further detail on planned FY21 work. | | | | |
| Royalton Sub 71 352 Break Install AH Line | | | | |
| Royalton Sub 71 352 Breaker Install | Units not applicable | 10/1/2020 | 9/30/2021 | \$77,26 |
| PG00020 - Mid-Atlantic North Track - C.EN.101828 | | | | |
| Replace 40 insulated joints, 260 joint eliminations, 260,000 LF spot surfacing upgrades, 34 replacements, and 100 concrete tie replacements. The program will also complete a series Track forces whenever possible. | | | | |
| Christiana Rock Cut Stabilization AH Line | | | | |
| C.EN.101828.FY2171 CHRISTIANA ROCK CUT STABILIZATION | Units not applicable | 10/16/2020 | 10/26/2020 | \$30,568 |
| Concrete Tie Replacement MP 35.3 - 105.2 AH Line | | | | |
| C.EN.101828.0030 TIES MAD TIE/TIMBER AH LN MP35.3-105.2 | 120 EA Install Ties and Timbers | 12/1/2020 | 12/29/2020 | \$138,115 |
| Downingtown East Drainage Improvements AH Line | | | | |
| C.EN.101828.FY2172 DRAN EAST DOWNINGTOWN DRAINAGE IMPROVEMENTS | Units not applicable | 10/26/2020 | 11/9/2020 | \$23,456 |

| Investment Description and FY21 Scope | Units | Start Date | End Date | FY21 Budget |
|--|---|------------|------------|-------------|
| C.EN.101828.FY2179 DRAN AH-55 DRAINAGE IMPROVEMENTS IN CUT SECTION | Units not applicable | 10/1/2020 | 10/15/2020 | \$42,295 |
| High Speed Surfacing MP 35.3 - 105.2 AH Line | | | | |
| C.EN.101828.FY2182 GEOM MADN HSS SURFACE AH LN MP35.3-105.2 | 20000 PF Surface Track, High Speed | 11/2/2020 | 8/30/2021 | \$224,404 |
| Insulated Joint Removal MP 35.3 - 105.2 AH Line | | | | |
| C.EN.101828.FY2103 RAIL MADN INSULATE JT AH LN MP35.3-105.2 | 3 EA Install Insulated Joint (Includes OTM) | 4/28/2021 | 5/26/2021 | \$30,604 |
| Interlocking Steel MP 35.3 - 105.2 AH Line | | | | |
| C.EN.101828.FY2150 TURN MADN I/L STEEL AH MP35.3-105.2 | 2 EA Renew Switch Point Stock Rail | 7/1/2021 | 7/9/2021 | \$18,663 |
| Joint Elimination MP 35.3 - 105.2 AH Line | | | | |
| C.EN.101828.0013 RAIL MADN JOINT ELIM AH LINE MP35.3-105.2 | 40 EA Field Weld and Grind Rail (Joint Elimination) | 2/10/2021 | 4/14/2021 | \$449,573 |
| Mt. Joy Drainage Improvements AH Line | | | | |
| C.EN.101828.FY2177 DRAN MAD NORTH DRAINAGE - MT JOY IMP. | Units not applicable | 10/1/2020 | 10/7/2020 | \$11,728 |
| Rock Cut Remediation Track 2 MP 85 AH Line | | | | |
| C.EN.101828.FY2175 RBED DRAN AH-85 2TRK ROCK CUT REMEDIATION | Units not applicable | 11/2/2020 | 3/29/2021 | \$532,752 |
| C.EN.101828.FY2176 RBED DRAN AH-85 2TRK ROCK CUT REMEDIATION | Units not applicable | 3/30/2021 | 8/18/2021 | \$532,753 |
| Rock Cut Remediation Track 2 MP 93.93 AH Line | | | | |
| C.EN.101828.FY2174 AH-93.3 2TRK ROCK CUT REMEDIATION | Units not applicable | 11/17/2020 | 11/27/2020 | \$30,568 |
| Spot Surfacing MP 35.3 - 105.2 AH Line | | | | |
| C.EN.101828.FY2140 GEOM AH LN MP 35.3-105.2 SPOT SURFACING | 60000 PF Surface Track, Spot | 10/1/2020 | 9/28/2021 | \$831,954 |
| Spot Undercutting MP 35.3 - 105.2 AH Line | | | | |
| C.EN.101828.FY2161 BLST MAD SPOT UNDRCUT AH LN MP35.3-105.2 | 3000 FT Vacuum Train, Spot Undercut | 12/1/2020 | 12/8/2020 | \$994,130 |
| PG00060 - Production High Speed Surfacing - C.EN.101855 | | | | |
| 300 Miles Surfaced by PROD HSS | | | | |
| High Speed Surfacing Production MP 35.3 - 105.2 AH Line | | | | |
| C.EN.101855.0069 GEOM AH LN MP 35.3-105.2 HSS PRODUCTION - 30 | Units not applicable | 10/1/2020 | 9/30/2021 | \$427,070 |
| PG00071 - Production Wood Tie/Timber Replacement - C.EN.101858 | | | | |
| See below for further detail on planned FY21 work. | | | | |
| Rheems to Roy Track 1 Wood Tie Replacement | | | | |
| C.EN.101858 TIE/TIMBER REPLACEMENT - RHEEMS TO ROY TK 1 | 11480 EA Install Ties and Timbers | 7/26/2021 | 9/23/2021 | \$2,389,945 |
| Rheems to Roy Track 2 Wood Tie Replacement | | | | |
| C.EN.101858 TIE/TIMBER REPLACEMENT - RHEEMS TO ROY TK 2 | 11480 EA Install Ties and Timbers | 9/27/2021 | 11/25/2021 | \$265,550 |
| Thorn to Park Track 1 Wood Tie Replacement | | | | |
| C.EN.101858 TIE/TIMBER REPLACEMENT - THORN TO PARK TK1 | 10560 EA Install Ties and Timbers | 11/19/2020 | 12/17/2020 | \$2,198,417 |
| Thorn to Park Track 4 Wood Tie Replacement | | | | |

| Investment Description and FY21 Scope | Units | Start Date | End Date | FY21 Budget |
|---|----------------------|----------------|----------------|--------------|
| C.EN.101858.0009 TIES THORN/PARK TK4-TIE/TIMB REPLACE | Units not applicable | 9/21/2020 | 10/22/2020 | \$1,627,194 |
| PG00090-RBED System Geotech Hazard Inventory & Assessment-C.EN.101908 | | | | |
| Geotech surveys of Harrisburg line, West side/empire connection, Empire Line, and Shoreli | ne. | | | |
| Roadbed System Geotech Hazard Inventory & Assessment - AH Line, Harrisburg | | | | |
| RBED System Geotech Hazard Inventory & Assessment - AH LN, HARRISBURG | Units not applicable | 2/8/2021 | 2/11/2021 | \$37,114 |
| | | BCC Segment 30 | Programs Total | \$12,904,722 |

Projects

| Investment Description and FY21 Scope | Start Date | End Date | FY21 Budget |
|---|--------------------------|------------------|-------------|
| BCC Eligible | | | |
| P000014 - Conestoga to Royalton Transmission Line Replacement - C.EN.101785 | | | |
| Advance the design, continue NS and utility coordination, continue the environmental and historical permitting pro- | ocess for NEPA complianc | е. | |
| C.EN.101785.0007 TRN CONESTOGA/ROYALTON 11LN-60% DESIGN | 10/1/2020 | 3/31/2021 | \$1,319,052 |
| C.EN.101785.0008 TRN CONESTOGA/ROYALTON 11LN-90% DESIGN | 4/1/2021 | 6/24/2021 | \$356,155 |
| C.EN.101785.0009 TRN CONESTOGA/ROYALTON 11LN-100% DESIGN | 6/24/2021 | 8/25/2021 | \$434,869 |
| C.EN.101785.0010 TRN CONESTGA/ROYALTN 11LN-FINAL DSN REVW | 6/24/2021 | 9/13/2021 | \$107,240 |
| C.EN.101785.0013 TRN CONESTGA/ROYALTN 11LN-CNSTRUCT CNTRT | 8/26/2021 | 4/25/2023 | \$87,798 |
| C.EN.101785.0014 TRN CONESTGA/ROYALTN 11LN-E.T. CONSTRUCT | 8/26/2021 | 6/7/2023 | \$108,480 |
| C.EN.101785.0016 TRN CONESTGA/ROYALTN 11LN-CNSTRUCT MGT. | 9/1/2021 | 4/28/2023 | \$81,009 |
| C.EN.101785.0017 TRN CONESTGA/ROYALTN 11LN-CNSTRUCT DSN | 8/26/2021 | 1/20/2022 | \$79,158 |
| C.EN.101785.0019 TRN CONESTGA/ROYALTN 11LN-PROJ. MGT. | 10/1/2020 | 4/27/2023 | \$426,539 |
| P000104 - Middletown, PA Station - C.EN.100891 | | | |
| FY21 Scope not available. | | | |
| Force Account | 8/1/2021 | 4/1/2022 | \$40,966 |
| P000111 - Conestoga Substation Improvements - C.EN.101877 | | | |
| Procure a design consultant, initiate design development and advance the design to 30%, initiate NEPA/SHPO cod | ordination, | | |
| C.EN.101877.0001 SUB CONESTOGA YARD REHAB-PRELIM DESIGN | 2/1/2021 | 9/30/2021 | \$900,817 |
| | BCC Segment 3 | 0 Projects Total | \$4,092,214 |



BCC Segment 31: Amtrak System-wide (Amtrak-owned)

Investment Type BCC Eligible **BCC** Ineligible Segment Total \$102,061,025 \$141,491,994 **Programs** \$39,430,969 **Projects** \$11,499,553 \$1,511,565 \$13,011,118 \$50,930,523 \$103,572,590 \$154,503,112 Total

Operators: Amtrak

Programs

| Investment Description and FY21 Scope | Units | Start Date | End Date | FY21 Budget |
|--|----------------------|------------|-----------|-------------|
| BCC Eligible | | | | |
| PG00003 - Rail Replacement - C.EN.101856 | | | | |
| 156,000 FT CWR (NEW Rail); 80,000 FT CWR (Re-purposed "FIT" Rail) | | | | |
| Project Controls | | | | |
| FY21.7000 GEOM AMTK SYS - GEOM AMTK SYS $\dot{\epsilon}$ PROJECT CONTROL SUPPORT | Units not applicable | 10/1/2020 | 9/30/2021 | \$42,897 |
| Project Management | | | | |
| C.EN.101856.8000 RAIL NEC RAIL REPLACE-CONTRACTOR/PM | Units not applicable | 10/1/2020 | 5/28/2021 | \$46,027 |
| PG00013 - Mid-Atlantic North Catenary - C.EN.101822 | | | | |
| See below for further detail on planned FY21 work. | | | | |
| Project Management | | | | |
| STIP MADN CATENARY PROGRAM-PROJ. MGMT. | Units not applicable | 10/1/2020 | 9/30/2021 | \$80,430 |
| PG00015 - Mid-Atlantic North Facilities - C.EN.101824 | | | | |
| See below for further detail on planned FY21 work. | | | | |
| CNOC Tower Wilmington Electrical System Upgrades | | | | |
| C.EN.101824.0006 MOFE WIL DE CAR SHOP BLD 1/2 DEMO DSN | Units not applicable | 10/1/2020 | 4/30/2021 | \$153,69 |
| C.EN.101824.0007 TOWR WIL DE CNOC-ELECTRICAL SYSTEM UPGRD | Units not applicable | 3/1/2021 | 8/27/2021 | \$213,680 |
| PG00017 - Mid-Atlantic North Signals - C.EN.101825 | | | | |
| See below for further detail on planned FY21 work. | | | | |
| Program Management | | | | |
| STIP MADN SIGNALS PROGRAM-PROJ. MGMT. | Units not applicable | 10/1/2020 | 9/30/2021 | \$80,430 |
| PG00018 - Mid-Atlantic North Structures - C.EN.101826 | | | | |
| See below for further detail on planned FY21 work. | | | | |
| Program Management | | | | |
| STIP MADN STRUCTURES PROGRAM-PROJ. MGMT. | Units not applicable | 10/1/2020 | 9/30/2021 | \$80,430 |
| PG00019 - Mid-Atlantic North Substations - C.EN.101827 | | | | |
| See below for further detail on planned FY21 work. | | | | |
| Program Management | | | | |
| STIP MADN SUBSTATIONS PROGRAM-PROJ. MGMT | Units not applicable | 10/1/2020 | 9/30/2021 | \$80,430 |
| PG00021 - Mid-Atlantic South Catenary - C.EN.101829 | | | | |
| 250 SAP assemblies, 2 Cat Poles, and 2 Switch Heaters | | | | |
| PG00021 - Mid-Atlantic South Catenary - C.EN.101829 | | | | |
| Project Controls Support | Units not applicable | 10/1/2020 | 9/30/2021 | \$23,556 |
| Program Management | | /==== | | 1-1,000 |

| nvestment Description and FY21 Scope | Units | Start Date | End Date | FY21 Budget |
|---|---------------------------------|-----------------------|-----------------------|----------------|
| C.EN.101829.9000 STIP MADS CATENARY PROGRAM-PROJ. MGMT. | Units not applicable | 10/1/2020 | 9/30/2021 | \$33,007 |
| PG00023 - Mid-Atlantic South Facilities - C.EN.101831 | | | | |
| Compressor Upgrades at Ivy City (MOFE), 480 Ground Power Upgrade, Electrical Upgrade | des at Wash. Terminal, and Hig | h Mast Lighting Repla | cement at Odenton | |
| Program Management | | | | |
| C.EN.101831.2021.9000 STIP MADS FACILITIES PROGRAM-PROJ. MGMT. | Units not applicable | 10/1/2020 | 9/30/2021 | \$33,006 |
| Project Controls | | | | |
| C.EN.101831.2021.9001 STIP MADS FACILITIES PROGRAM-PROJECT CONTROL SUPPORT | Units not applicable | 10/1/2020 | 9/30/2021 | \$25,443 |
| PG00026 - Mid-Atlantic South Structures - C.EN.101833 | | | | |
| Upgrades to: 4 culverts, 2 tunnels, 5 retaining walls, 5 signal bridges, 5 undergrade bridg | es, and 3 movable bridges | | | |
| Program Management | | | | |
| C.EN.101833.2021.9000 STIP MADS STRUCTURES PROGRAM-PROJ. MGMT. | Units not applicable | 10/1/2020 | 9/30/2021 | \$33,006 |
| Project Controls | | | | |
| C.EN.101833.2021.8002 PROJECT CONTROL SUPPORT | Units not applicable | 10/1/2020 | 9/30/2021 | \$32,981 |
| PG00027 - Mid-Atlantic South Substations - C.EN.101834 | | | | |
| Tie switch replacement at 2 substations, and breaker replacement at Sub 15 | | | | |
| Program Management | | | | |
| C.EN.101834.8000 STIP MADS CATENARY PROGRAM-PROJ. MGMT. | Units not applicable | 10/1/2020 | 9/30/2021 | \$33,006 |
| Project Controls | | | | |
| C.EN.101834.2021.8001 STIP MADS CATENARY PROGRAM-PROJECT CONTROL SUPPORT | Units not applicable | 10/1/2020 | 9/30/2021 | \$23,557 |
| PG00028 - Mid-Atlantic South Track - C.EN.101835 | | | | |
| Replace 40 insulated joints, 260 joint eliminations, 260000 LF spot surfacing upgrades, 3-replacements, & 100 concrete tie replacements along with associated drainage improven | | | | |
| Program Management | | | | |
| C.EN.101835.9001 STIP MADS TRACK PROGRAM PROJ. MGT. | Units not applicable | 10/1/2020 | 6/7/2021 | \$213,935 |
| Project Controls | | | | |
| Project Controls | Units not applicable | 10/1/2020 | 12/29/2020 | \$87,434 |
| Rail Lubrication Upgrades AP Line | | | | |
| C.EN.101835.0008 TKAP MAD SOUTH RAIL LUBRICATION UPGRADES | Units not applicable | 10/1/2020 | 11/25/2020 | \$651,802 |
| Track Layover Equipment | | | | |
| C.EN.101835.0799 STIP MADSOUTH TRK PROGRAM-LAYOVER EQUIP | Units not applicable | 10/1/2020 | 10/1/2020 | \$819,180 |
| PG00029 - New England Catenary - C.EN.101836 | | | | ***** |
| Projects include catenary hardware renewal between New Haven, CT, and Boston, MA or OCS in service on Track 4 between Hebronville I/L and Holden I/L in Attleboro, MA. | n the AB Line, replacing of the | MOD Units at Southa | mpton Street Yard, ar | nd placing the |
| Program Management | | | | |
| C.EN.101836.8000 STIP NEW ENGLAND CATENARY PROGRAM-PM | Units not applicable | 10/1/2020 | 9/30/2021 | \$23,949 |
| | | | | / |
| Project Controls | Units not applicable | 10/1/2020 | 9/30/2021 | \$47,563 |
| C EN 101836 8100 STIP NED CAT PRI/PROGRM ADMINISTIPPORT | | 10/1/2020 | // JU/ ZUZ I | ψ47,303 |
| C.EN.101836.8100 STIP NED CAT PRJ/PROGRM ADMIN SUPPORT | offics flot applicable | | | |
| C.EN.101836.8100 STIP NED CAT PRJ/PROGRM ADMIN SUPPORT PG00030 - New England Communications - C.EN.101837 FY21 Scope not available. | Onits not applicable | | | |

| Investment Description and FY21 Scope | Units | Start Date | End Date | FY21 Budget |
|--|----------------------|------------|-----------|-------------|
| C.EN.101837.8000 STIP NED COMMUNICATIONS PROGRAM-PM | Units not applicable | 10/1/2020 | 9/30/2021 | \$8,982 |
| Project Controls | | | | |
| C.EN.101839.8100 STIP NED COMM PROJECT/PROGRAM ADMIN SUPPORT | Units not applicable | 10/1/2020 | 9/30/2021 | \$35,672 |
| PG00031 - New England Facilities - C.EN.101838 | | | | |
| Facilities we would be included to see the state of the control of the section of | | | | 1.16 |

Facilities upgrades include upgrades to the water mains and parking lot serving the Southampton Street Yard facility as well as upgrades to the train servicing platforms inside the S&I building. Complete safety and energy efficiency upgrades at Southampton Street and Hamden MOFW Facilities.

Project Management

C.EN.101838.8000 STIP NED FACILITIES PROGRAM-PROJ. MGMT. 10/1/2020 9/30/2021 Units not applicable \$71.847

PG00034 - New England Structures - C.EN.101840

Complete the steel upgrades and bridge timber replacement at the Conn. River Bridge (CT49.73) on the AS Line and replace the bridge timbers on the Conn. River Bridge (CT106.89) on the AB Line. Complete the installation of the Hull Street Strike Beam and steel and abutment upgrades to State Pier (CT123.59) undergrade bridge. Complete several SOGR projects at the five movable bridges on the AB Line. Design projects include retaining wall upgrades at Shoreline Junction, Hartford Tunnel Drainage Improvements, and culvert upgrades on both the AB and AB lines.

| Project Management | | | | |
|---|----------------------|-----------|-----------|----------|
| C.EN.101840.8000 STIP NEW ENGLAND STRUCTURES PROGRAM-PM | Units not applicable | 10/1/2020 | 9/30/2021 | \$11,968 |
| Project Support | | | | |
| C.EN.101840.8100 STIP NED STRUCT PRJ/PROGRM ADMIN SUPP | Units not applicable | 10/1/2020 | 9/30/2021 | \$47,563 |

PG00035 - New England Substations - C.EN.101841

Projects include replacing the transformer at the Norton Substation (MP198.9), installing commercial power and interlocking lighting at View I/L. Replace the sump pumps at New London, Millstone, Leetes Island, and Madison. Replace the batteries at the Stonington Paralling Station and ground power at Whitfield Siding in Guilford, CT. Replace breaker relays and breaker vacuum bottle replacement at two substations and complete a substation assessment. Work to be performed by Amtrak ET Substation forces and contractor

| ET Document Control | | | | |
|--|----------------------|-----------|-----------|----------|
| C.EN.101841.0010 STIP NED E.TDOCUMENT CONTROL CAP PLAN | Units not applicable | 10/1/2020 | 5/28/2021 | \$53,360 |
| NED Substation Assessment at Sharon, New London, Warwick, Branford Subs | | | | |
| C.EN.101841.0018 NED Substation Assessment - (Sharon, New London, Warwick, Branford) | Units not applicable | 1/4/2021 | 3/16/2021 | \$85,803 |
| Program Management | | | | |
| C.EN.101841.8000 STIP NEW ENGLAND SUBSTATIONS PROGPM | Units not applicable | 10/1/2020 | 9/30/2021 | \$5,984 |
| Project Controls | | | | |
| C.EN.101841.8100 STIP NED SUBSTA PRJ/PROGRM ADMIN SUPP | Units not applicable | 10/1/2020 | 9/30/2021 | \$47,563 |

PG00036 - New England Track - C.EN.101842

Replace wood ties, concrete ties, interlocking steel, and insulated joints as well as continue joint elimination across the AS Line in Connecticut and Massachusetts and the AB Line in Connecticut and Rhode Island. Perform ride quality, drainage, and road bed improvements through spot surfacing, spot undercutting, ditching and grading across the AS Line in Connecticut and Massachusetts and the AB Line in Connecticut and Rhode Island. Work to be performed by Amtrak Track Department forces.

| Program Management | | | | |
|---|----------------------|-----------|-----------|----------|
| C.EN.101842.8000 STIP NED TRACK PROGRAM-PM | Units not applicable | 10/1/2020 | 9/30/2021 | \$47,898 |
| Project Controls | | | | |
| C.EN.101842.8100 STIP NED TRK PRJ/PROGRM ADMIN SUPP | Units not applicable | 10/1/2020 | 9/30/2021 | \$47,563 |
| PG00037 - New York Catenary - C.EN.101843 | | | | |

See below for further detail on planned EY21 work

| See below for further detail on planned 1.121 work. | | | | |
|---|----------------------|-----------|-----------|----------|
| Program Management | | | | |
| C.EN.101843.9002-PH STIP NYD CATENARY PROGRAM PROJ. SUPPORT | Units not applicable | 10/1/2020 | 9/30/2021 | \$6,447 |
| Project Management | | | | |
| C.EN.101843.9001 STIP NYD CATENARY PROGRAM PROJ. MGMT. | Units not applicable | 10/1/2020 | 9/30/2021 | \$13,779 |

PG00039 - New York Facilities - C.EN.101845

See below for further detail on planned FY21 work.

| Investment Description and FY21 Scope | Units | Start Date | End Date | FY21 Budget |
|---|----------------------|------------|-----------|-------------|
| Fire Life Safety Fire Alarm Panel Upgrades | | | | |
| C.EN.101845.HD.0000158-PH FIRE ALARM PANEL UPGRADES FSL | Units not applicable | 10/1/2020 | 3/31/2021 | \$106,094 |
| Project Controls | | | | |
| C.EN.101845.2021.8001-PH STIP NEW YORK FACILITIES PROGRAM-PRJ SUPPORT | Units not applicable | 10/1/2020 | 9/30/2021 | \$8,935 |
| Project Management | | | | |
| C.EN.101845.8000 STIP NEW YORK FACILITIES PROGRAM-PRJ MGT | Units not applicable | 10/1/2020 | 9/30/2021 | \$17,874 |
| PG00041 - New York Signals - C.EN.101846 | | | | |
| See below for further detail on planned FY21 work. | | | | |
| Project Controls | | | | |
| C.EN.101846.9002-PH STIP NYD SIGNALS PROGRAM PROJ. SUPPORT | Units not applicable | 10/1/2020 | 9/30/2021 | \$10,723 |
| Project Management | | | | |
| C.EN.101846.9001 STIP NYD SIGNALS PROGRAM PROJ. MGMT. | Units not applicable | 10/1/2020 | 9/30/2021 | \$21,448 |
| PG00042 - New York Structures - C.EN.101847 | | | | |
| See below for further detail on planned FY21 work. | | | | |
| New York Structures - Project Management | | | | |
| C.EN.101847.8000 STIP NEW YORK STRUCTURES PROGRAM-PRJ MGT | Units not applicable | 10/1/2020 | 9/30/2021 | \$60,772 |
| PG00043 - New York Substations - C.EN.101848 | | | | |
| See below for further detail on planned FY21 work. | | | | |
| Project Controls | | | | |
| C.EN.101848.9002 STIP NYD SUBSTATION PROGRAM-SUPPORT | Units not applicable | 10/1/2020 | 9/30/2021 | \$21,448 |
| PG00044 - New York Track - C.EN.101849 | | | | |
| See below for further detail on planned FY21 work. | | | | |
| New York Track - Layover Equipment | | | | |
| C.EN.101849.0128 STIP NEW YORK TRK PROGRAM-LAYOVER EQUIP | Units not applicable | 10/1/2020 | 9/30/2021 | \$3,339,930 |
| New York Track - Project Management | | | | |
| C.EN.101849.9001 STIP NEW YORK TRACK PROGRAM PROJ. MGT. | Units not applicable | 10/1/2020 | 9/30/2021 | \$199,981 |
| New York Track - Project Support | | | | |
| C.EN.101849.9002-PH STIP NEW YORK TRACK PROGRAM PROJ. SUPPORT | Units not applicable | 10/1/2020 | 9/30/2021 | \$100,290 |
| Rail Lubrication Upgrades AN Line | | | | |
| C.EN.101849.0132 TKAP NYD RAIL LUBRICATION UPGRADE | Units not applicable | 10/1/2020 | 9/30/2021 | \$209,964 |
| PG00057 - TLS Concrete Tie Replacement - C.EN.101652 | | | | |
| 80,134 Concrete Ties; 320,534 FT CWR | | | | |
| CWR Distribution | | | | |
| 901652.9002 TLS AMTRAK SYSTEM - CWR DISTRIBUTION | Units not applicable | 10/1/2020 | 9/30/2021 | \$534,794 |
| Project Management | | | | |
| 901652.9000 TLS AMTRAK SYSTEM - CONTRACTOR/PM | Units not applicable | 10/1/2020 | 9/30/2021 | \$428,961 |
| PG00060 - Production High Speed Surfacing - C.EN.101855 | | | | |
| 300 Miles Surfaced by PROD HSS | | | | |
| Contractor Equipment | | | | |
| C.EN.101855.9002GEOM AMTK SYS SURFACING-CNTRTOR/EQUIP | Units not applicable | 10/1/2020 | 9/30/2021 | \$214,479 |
| Overlift Tamping Training | | | | |

| Investment Description and FY21 Scope | Units | Start Date | End Date | FY21 Budget |
|---|----------------------|------------|------------|---------------------------------------|
| C.EN.101855.9007 GEOM AMTK SYS - GEOM AMTK SYS ; DESIGN OVERLIFT TAMPING TRAINING | Units not applicable | 10/1/2020 | 9/30/2021 | \$26,809 |
| Overlift Tamping Upgrade | | | | |
| C.EN.101855.9005 GEOM AMTK SYS - GEOM AMTK SYS ; DESIGN OVERLIFT TAMPING UPGRADE | Units not applicable | 10/1/2020 | 9/30/2021 | \$36,781 |
| Project Controls | | | | |
| C.EN.101855.7000 GEOM AMTK SYS - GEOM AMTK SYS ; PROJECT CONTROL SUPPORT | Units not applicable | 10/1/2020 | 9/30/2021 | \$42,897 |
| Project Management | | | | |
| C.EN.101855.9000GEOM AMTK SYS SURFACING-PROJ. MGMT. | Units not applicable | 10/1/2020 | 9/30/2021 | \$107,242 |
| C.EN.101855.9004 GEOM AMTK SYS - SURFACING PROGRAM DEVELOPMENT | Units not applicable | 10/1/2020 | 9/30/2021 | \$214,479 |
| System Surfacing Equipment Maintenance | | | | |
| C.EN.101855.9003GEOM AMTK SYS SURFACING-EQUIP MAINT | Units not applicable | 10/1/2020 | 9/30/2021 | \$321,721 |
| Tamping Effectiveness | | | | |
| C.EN.101855.9006 GEOM AMTK SYS - GEOM AMTK SYS ; TAMPING EFFECTIVENESS PRJ | Units not applicable | 10/1/2020 | 9/30/2021 | \$107,242 |
| PG00061 - Total Track Renewal - C.EN.101871 | | | | |
| 3,320 track feet , 30th St Track 8 and Track 10 | | | | |
| Program Management | | | | |
| C.EN.101871.8001 AMTRAK SYS TOTAL TRACK RENEWAL-PM | Units not applicable | 8/3/2020 | 8/2/2021 | \$44,646 |
| Project Controls | | | | |
| XXXX.7000 TKRN AMTRAK SYSTEM - PROJECT CONTROL SUPPORT | Units not applicable | 8/3/2020 | 8/2/2021 | \$35,718 |
| PG00062 - Track Undercutting - C.EN.100269 | | | | |
| 109,392 FT Undercutting | | | | |
| Contingency | | | | |
| FY21 Project Contingency | Units not applicable | 10/1/2020 | 11/19/2020 | \$564,648 |
| PG00063 - Track Rehabilitation - C.EN.101859 | | | | |
| See below for further detail on planned FY21 work. | | | | |
| Project Controls | | | | |
| FY21.8002 PROJECT CONTROL SUPPORT | Units not applicable | 10/1/2020 | 9/30/2021 | \$37,697 |
| PG00064 - Rail Grinding - C.EN.101794 | | | | |
| Grind 1,045 miles along the NEC in FY21. | | | | |
| Project Controls | | | | |
| FY21.8002 PROJECT CONTROL SUPPORT | Units not applicable | 10/1/2020 | 9/30/2021 | \$37,697 |
| Project Management | | | | 40.70 |
| XXXX.X8000 RAIL NEC GRINDING PROJECT MANAGEMENT | Units not applicable | 10/2/2020 | 9/29/2021 | \$85,791 |
| PG00065 - Turnout Renewal - C.EN.101860 | | | | , , , , , , , , , , , , , , , , , , , |
| See below for further detail on planned FY21 work. | | | | |
| Equipment Rentals | | | | |
| C.EN.101860.0079 TURN - EQUIPMENT RENTALS | Units not applicable | 10/1/2020 | 9/30/2021 | \$80,431 |
| Project Management | | | | |
| C.EN.101860.0077TURN AMTRAK NEC - PROJECT MANAGEMENT | Units not applicable | 10/1/2020 | 9/29/2021 | \$169,891 |
| Turnout Renewal Survey and Design | | | | |
| C.EN.101860.0078TURN NEC TURNOUT RENEW-SURVEY/DESIGN | Units not applicable | 10/1/2020 | 9/30/2021 | \$116,969 |

| nvestment Description and FY21 Scope | Units | Start Date | End Date | FY21 Budge |
|---|----------------------------------|------------------------|---------------------|-----------------|
| PG00067 - Production Concrete Tie/Timber Replacement - C.EN.101870 | | | | |
| 550 West Fair to Ham Track #1 | | | | |
| Program Management | | | | |
| C.EN.101870.8000 TIES CONCRETE TIE/TIMB PROGRAM-PM | Units not applicable | 10/1/2020 | 9/30/2021 | \$26,80 |
| PG00069 - Fence Upgrades - C.EN.101854 | | | | |
| See below for further detail on planned FY21 work. | | | | |
| Amtrak System Fence Upgrade Project Management | | | | |
| C.EN.101854.8000 FEN AMTRAK SYS FENCE UPG-PROJECT MGMT. | Units not applicable | 10/1/2020 | 9/30/2021 | \$85,79 |
| Project Control Support | | | | |
| C.EN.101854.2021.8002 PROJECT CONTROL SUPPORT | Units not applicable | 10/1/2020 | 9/30/2021 | \$37,69 |
| PG00071 - Production Wood Tie/Timber Replacement - C.EN.101858 | | | | |
| See below for further detail on planned FY21 work. | | | | |
| Misc. Wood Tie Replacement | | | | |
| C.EN.101858.2021.20 TIE/TIMBER REPLACEMENT - Z192 | 7043 EA Install Ties and Timbers | 6/1/2021 | 9/30/2021 | \$2,916,85 |
| Project Controls | | | | |
| C.EN.101855.7000 GEOM AMTK SYS - GEOM AMTK SYS ¿ PROJECT CONTROL SUPPORT | Units not applicable | 10/1/2020 | 9/30/2021 | \$42,89 |
| Tie/Timber Replacement - Equipment Rental | | | | |
| C.EN.101858.9003 TIE/TIMBER REPLACEMENT - EQUIP RENTAL | Units not applicable | 10/1/2020 | 9/30/2021 | \$214,4 |
| Tie/Timber Replacement - Project Management | | | | |
| C.EN.101858.7100 TIE/TIMBER REPLACEMENT - PROJECT MANAGMENT | Units not applicable | 10/1/2020 | 9/30/2021 | \$53,6 |
| PG00077 - Engineering Capital / Management - C.EN.100418 | | | | |
| Continued support of FY21 Engineering portfolio with projects controls services including | not limited to estimating, sch | neduling, reporting an | d document control. | |
| 1801 Market Street Philadelphia - Engineering Office Rent | | | | |
| C.EN.100418.0009 SYS 1801 MARKET ST PHILA-ENG OFFICE RENT | Units not applicable | 10/1/2020 | 9/30/2021 | \$117,10 |
| Engineering Capital Program - Non Project Management Office Staff | | | | |
| C.EN.100418.0005 SYS ENG CAPITAL PROGM-NON PMO STAFF | Units not applicable | 10/1/2020 | 9/30/2021 | \$409,43 |
| Engineering Capital Program - Project Management Office Staff | | | | |
| C.EN.100418.0004 SYS ENG CAPITAL PROGRAM-PMO STAFF | Units not applicable | 10/1/2020 | 9/30/2021 | \$2,471,89 |
| Engineering Schedule Cost/Support | | | | |
| C.EN.100418.0003 SYS ENGINEERING SCHEDULE COST/SUPPORT | Units not applicable | 10/1/2020 | 9/30/2021 | \$1,657,73 |
| PG00078 - Engineering Asset Management System - C.EN.100123 | | | | |
| We will continue to support the Maximo 7.6 and ESRI implementations. We plan on procudevelop the Digital Project Environment, 2021 Infrastructure Asset Line Plan and Maximo our Asset collection process. We will mature the autonomous signal inspection system prothe needs and increased efficiencies of the Engineering department | system changes and user train | ning. We will continue | to progress PLM and | further improve |
| Autonomous Signal Inspection System | | | | |
| C.EN.100123.0163 APP AUTONOMUS SIGNAL INSPECT SYSTEM | Units not applicable | 10/1/2020 | 9/30/2021 | \$210,18 |
| C.EN.100123.0169 SYS MOW EQUIPMENT MOBILE APP PRJ | | | | |
| C.EN.100123.0169 SYS MOW EQUIPMENT MOBILE APP PRJ | Units not applicable | 10/1/2020 | 9/30/2021 | \$20,3 |
| Engineering Asset Management Plan | | | | |
| | | 10/1/2020 | 9/30/2021 | \$2,661,69 |

| vestment Description and FY21 Scope | Units | Start Date | End Date | FY21 Budge |
|--|------------------------------------|---------------------|--------------|------------|
| C.EN.100123.0022 APP ENG ASSET MGT PM | Units not applicable | 10/1/2020 | 9/30/2021 | \$64,34 |
| Enterprise Asset Management Device/System Upgrades | | | | |
| C.EN.100123.0177 APP EAM DEVICE/SYSTEM UPGRADES CAP | Units not applicable | 10/1/2020 | 9/30/2021 | \$99,73 |
| Enterprise Asset Management Device/System Upgrades Project | | | | |
| C.EN.100123.0178 APP EAM DEVICE/SYSTEM UPGRADES PRJ | Units not applicable | 10/1/2020 | 9/30/2021 | \$99,73 |
| Enterprise Asset Management System - Maximo Modifications | | | | |
| C.EN.100123.0173 APP ENG ASSET MGT SYS-MAXIMO MODS | Units not applicable | 10/1/2020 | 9/30/2021 | \$97,58 |
| Maximo Engineering Asset Library Upgrade | | | | |
| C.EN.100123.0170 APP MAXIMO ENGR ASSET LIBRARY UPGRADE | Units not applicable | 10/1/2020 | 9/30/2021 | \$499,7 |
| 00083 - Communications System Upgrades - C.EN.101857 | | | | |
| ee below for further detail on planned FY21 work. | | | | |
| Fiber Transport Backbone | | | | |
| Equipment Purchase, Configuration and Staging | Units not applicable | 11/3/2020 | 7/16/2021 | \$3,034,04 |
| Site Installation / Turn Up | Units not applicable | 7/19/2021 | 8/6/2021 | \$156,3 |
| Site Surveys and Fiber Testing | Units not applicable | 10/1/2020 | 11/2/2020 | \$83,8 |
| Test and Commission | Units not applicable | 8/9/2021 | 9/1/2021 | \$39,4 |
| Fiber Transport Upgrade | | | | |
| FY21.0002 FIBER TRANSPORT UPGRADE - HBG LINE | Units not applicable | 10/26/2020 | 9/29/2022 | \$214,4 |
| NEC Fiber Optic Replacement | | | | |
| C.EN.101857.0012 CABF NEC-FIBER OPTIC ELEC REPLACE SPECS | Units not applicable | 10/1/2020 | 11/30/2020 | \$77,2 |
| New York West Fiber Transport Upgrades | | | | |
| Core Manhole, Install Pipe and Hand Hole | Units not applicable | 10/26/2020 | 9/30/2021 | \$2,0 |
| Install Innerduct and Fiber | Units not applicable | 10/26/2020 | 9/30/2021 | \$5,7 |
| Labor | Units not applicable | 10/26/2020 | 9/30/2021 | \$44,5 |
| Ring Cut Splice and Terminate Fiber | Units not applicable | 10/26/2020 | 9/30/2021 | \$4,0 |
| Upgrade Network Switches | Units not applicable | 10/26/2020 | 9/30/2021 | \$5,5 |
| NYD Communications House Replacement | | | | |
| B&B dig foundations and Place Comm Hut on Stands | Units not applicable | 5/3/2021 | 9/30/2021 | \$113,8 |
| Install new Split Unit | Units not applicable | 5/3/2021 | 9/30/2021 | \$33,0 |
| Labor | Units not applicable | 5/3/2021 | 9/30/2021 | \$63,3 |
| Remove and Replace Existing Battery/Rectifier Plant | Units not applicable | 5/3/2021 | 9/30/2021 | \$61,5 |
| Remove equipment from old hut and reinstall in new Hut | Units not applicable | 5/3/2021 | 9/30/2021 | \$42,4 |
| Remove Existing/Retrofit Opening | Units not applicable | 5/3/2021 | 9/30/2021 | \$7,8 |
| Replace Comm Hut | Units not applicable | 5/3/2021 | 9/30/2021 | \$21,5 |
| Upgrade Comm Location UPS | Units not applicable | 5/3/2021 | 9/30/2021 | \$3 |
| Radio Systems Infrastructure Upgrade | | | | |
| FY21.0003 RADIO SYSTEMS INFRASTRUCTURE UPG. PRG. | Units not applicable | 5/3/2021 | 3/7/2022 | \$413,8 |
| Wayside Fiber Upgrade New York to Washington DC | | | | |
| FY21.0004 WAYSIDE FIBER UPGRADE - NY TO DC | Units not applicable | 1/4/2021 | 6/2/2022 | \$214,4 |
| 00085 - Amtrak Owned Positive Train CTRL (PTC) Installation - C.EN.201034 | | | | |
| Y21 Scope includes completing all boundary locations, OBC Upgrates, completion | n of STS Migration and TP upgrades | s, ACSES Monitoring | Tool Phase 2 | |
| Burns Scope | | | | |
| Burns Scope | Units not applicable | 7/1/2020 | 12/31/2020 | \$127,2 |

| estment Description and FY21 Scope | Units | Start Date | End Date | FY21 Budge |
|---|----------------------------------|---------------------|--------------------|------------------|
| C.EN.201034.0076 PTC GATE/"F" TWR/HUDSON LIRR BNDRY UPG | | | | |
| C.EN.201034.0076 PTC GATE/"F" TWR/HUDSON LIRR BNDRY UPG | Units not applicable | 10/1/2020 | 11/30/2020 | \$86,53 |
| C.EN.201034.0116 ACSE PTC SAFETY PLAN SYSTEM UPGS | | | | |
| C.EN.201034.0116 ACSE PTC SAFETY PLAN SYSTEM UPGS | Units not applicable | 10/1/2020 | 3/31/2021 | \$91,76 |
| C.EN.201034.0117 ACSE AMTK MSA TASK#42-D&MS INSTALLS | | | | |
| C.EN.201034.0117 ACSE AMTK MSA TASK#42-D&MS INSTALLS | Units not applicable | 7/21/2020 | 10/20/2020 | \$12,19 |
| C.EN.201034.9001 ACSE AMTRK OWNED PTC PROJECT MGT. | | | | |
| C.EN.201034.9001 ACSE AMTRK OWNED PTC PROJECT MGT. | Units not applicable | 10/1/2020 | 12/31/2020 | \$69,70 |
| FY21 | | | | |
| FY21 | Units not applicable | 10/1/2020 | 10/29/2020 | \$265,95 |
| FY21 ASCE Monitoring Tool Phase | | | | |
| FY21 ACSES MONITORING TOOL PHASE 2 | Units not applicable | 1/4/2021 | 9/29/2021 | \$268,10 |
| HRSTS | | | | |
| HRSTS Scope | Units not applicable | 10/1/2020 | 9/29/2021 | \$2,005,06 |
| Materials | | | | |
| Materials | Units not applicable | 10/1/2020 | 1/29/2021 | \$107,24 |
| PTC ACSE NEC Improvement TP Migration | | | | |
| C.EN.201034.0084 ACSE PTC NEC IMPROVEMENT-TP MIGRATION | Units not applicable | 10/30/2020 | 2/26/2021 | \$455,78 |
| PTC ACSE Transponder Upgrades | | | | |
| C.EN.201034.0113 ACSE PTC NEC IMPRV-WIU/TRANSPONDER UPGS | Units not applicable | 10/1/2020 | 1/26/2021 | \$136,65 |
| PTC ASCE Interoperability MBTA | | | | |
| C.EN.201034.0092 ACSE STS TO STS INTEROPERABILITY MBTA | Units not applicable | 10/1/2019 | 11/2/2020 | \$201,81 |
| PTC ASCE Interoperability MNR | | | | |
| C.EN.201034.0088 ACSE STS TO STS INTEROPERABILITY MNR | Units not applicable | 8/1/2019 | 6/28/2021 | \$54,31 |
| PTC ASCE Interoperability NJT | | | | |
| C.EN.201034.0091 ACSE STS TO STS INTEROPERABILITY NJT | Units not applicable | 2/3/2020 | 3/5/2021 | \$62,40 |
| PTC ASCE Interoperability SEPTA | | | | |
| C.EN.201034.0090 ACSE STS TO STS INTEROPERABILITY SEPTA | Units not applicable | 7/1/2020 | 10/30/2020 | \$54,75 |
| PTC ASCE Siemens | | | | |
| C.EN.201034.0059 ACSE AMTRAK OWNED PTC-SIEMENS REV11 | Units not applicable | 1/4/2021 | 9/30/2021 | \$6,73 |
| PTC Northeast Corridor - Interoperability Testing | | | | |
| C.EN.201034.0114 ACSE PTC NEC - INTEROPERABILITY TESTING | Units not applicable | 10/23/2020 | 10/29/2021 | \$416,55 |
| PTC Northeast Corridor Improvement | | | | |
| FY21 - ASCES PTC NEC IMPROVEMENT - Locations | Units not applicable | 10/1/2020 | 10/28/2021 | \$3,194,31 |
| REV 12 FY21 | | | | |
| REV 12 FY21 | Units not applicable | 1/4/2021 | 9/30/2021 | \$2,895,48 |
| 00086 - ET Linear Assets Research and Development Program - C.EN.101873 | | | | |
| he FY 21 scope is for the design of signal hut prototype, Wildlife Asset Protection, and OCS Hauling Clamp. | Dead End Pulley Assembly, Messer | nger Clamp Lock Nut | Assembly, CMV Wire | Detection System |
| Electronic Traction System Project Management | | | | |
| C.EN.101873.8000 SYS E.T. SYSTEM-PROJECT MANAGEMENT | Units not applicable | 10/1/2020 | 9/30/2021 | \$8,41 |
| Electronic Traction System Research and Development | | | | |
| • | | | | |

| evestment Description and FY21 Scope | Units | Start Date | End Date | FY21 Budge |
|--|-------------------------------|------------------------|-------------------------|----------------|
| Electronic Traction System Signal Hut Conceptual Design | | | | |
| C.EN.101873.0002 SYS E.T. SYSTEM-SIG HUT CONCEPTUAL DSN | Units not applicable | 2/1/2021 | 7/30/2021 | \$16,14 |
| Electronic Traction System Signal Hut Final Design | | | | |
| C.EN.101873.0003 SYS E.T. SYSTEM-SIG HUT FINAL DSN | Units not applicable | 7/2/2021 | 9/3/2021 | \$96,70 |
| Mid-Atlantic Division 1001 Circuit 19 Bridge Wildlife and Asset Protection | | | | |
| XXX4 SYS ET - MAD 1001 CIRCUIT 19 BRDG WILDLIFE & ASSET PROTECTION | Units not applicable | 11/2/2020 | 11/23/2020 | \$187,81 |
| Mid-Atlantic Division 6.9KV to 12KV Circuits Wildlife and Asset Protection | | | | |
| XXX5 SYS ET - MAD 6.9KV TO 12 KV CIRCUITS WILDLIFE & ASSET PROTECTION | Units not applicable | 12/1/2020 | 12/16/2020 | \$108,39 |
| Northeast Division 8002 Circuit 22 Bridge Wildlife and Asset Protection | | | | |
| XXX6 SYS ET - NED 8002 CIRCUIT 22 BRDG WILDLIFE & ASSET PROTECTION | Units not applicable | 4/1/2021 | 4/7/2021 | \$67,00 |
| Northeast Division CMV Wire Detection System | | | | |
| XX10 SYS ET - NED CMV WIRE DETECTION SYSTEM | Units not applicable | 10/1/2020 | 10/7/2020 | \$26,22 |
| Northeast Division Dead End Pulley Assembly | | | | |
| XXX8 SYS ET - NED DEAD END PULLEY ASSEMBLY | Units not applicable | 11/2/2020 | 11/16/2020 | \$65,05 |
| Northeast Division Equipment to 8002 Circuits Wildlife and Asset Protection | | | | |
| XXX7 SYS ET - NED EQUIP TO 8002 CIRCUITS WILDLIFE & ASSET PROTECTION | Units not applicable | 10/1/2020 | 10/15/2020 | \$110,84 |
| Northeast Division OCS Hauling Clamp | | | | |
| XX11 SYS ET - NED OCS HAULING CLAMP | Units not applicable | 5/3/2021 | 5/26/2021 | \$82,66 |
| Northeast Division OCS Messenger Clamp Lock Nut Assembly | | | | |
| XXX9 SYS ET - NED OCS MESSENGER CLAMP LOCK NUT ASSEMBLY | Units not applicable | 3/1/2021 | 3/4/2021 | \$33,72 |
| G00090-RBED System Geotech Hazard Inventory & Assessment-C.EN.101908 | | | | |
| Geotech surveys of Harrisburg line, West side/empire connection, Empire Line, and Sho | reline. | | | |
| Roadbed System Geotech Hazard Inventory & Assessment - AB Line, Shoreline | | | | |
| RBED System Geotech Hazard Inventory & Assessment - AB LN, SHORELINE | Units not applicable | 3/8/2021 | 3/12/2021 | \$46,41 |
| Roadbed System Geotech Hazard Inventory & Assessment - Project Control Supp | | | | , ., |
| RBED System Geotech Hazard Inventory & Assessment - PROJECT CONTROL SUPPORT | Units not applicable | 10/1/2020 | 9/30/2021 | \$28,27 |
| Roadbed System Geotech Hazard Inventory & Assessment - Project Management | | | | |
| RBED System Geotech Hazard Inventory & Assessment - PROJECT MANAGMENT | Units not applicable | 10/1/2020 | 9/30/2021 | \$75,54 |
| CC Ineligible | | | | |
| G00052 - Engineering Major Equipment Acquisition - C.EN.101757 | | | | |
| EQIR ENG EQUIP PURCH-TRACK LAYING MACH For the equipment purchase of a new | Track Laving Machine (TLM) fo | r concrete tie renlace | ment projects | |
| | mack Laying indenine (12m) to | recinerate he replace | ment projects. | |
| C.EN.101757.0002 EQIR ENG EQUIP PURCH-TRACK LAYING MACH | 11.5 | 40/4/0000 | 0/20/0004 | ¢4.220.07 |
| C.EN.101757.0002 EQIR ENG EQUIP PURCH-TRACK LAYING MACH EQIR ENG RLLING STCK PURCH-FLAT CARS-120 For the purchase of 120 Flat Cars to si | Units not applicable | 10/1/2020 | 9/30/2021 | \$4,338,97 |
| FY28. | upport work along Amtrak's Ne | c. vve wiii purchase | TO trucks each year fic | om Fi 19 thru |
| C.EN.101757.0006 EQIR ENG RLLING STCK PURCH-FLAT CARS-120 | | | | |
| C.EN.101757.0006 EQIR ENG RLLING STCK PURCH-FLAT CARS-120 | Units not applicable | 10/1/2020 | 9/30/2021 | \$4,908,96 |
| EQIR ENG ROLL STCK PUR- BALLAST CARS-360 For the purchase of 360 Ballast Cars to FY28. | support work along Amtrak's | NEC. We will purchas | e 30 trucks each year | from FY19 thru |
| C.EN.101757.0007 EQIR ENG ROLL STCK PUR- BALLAST CARS-360 | | | | |
| C.EN.101757.0007 EQIR ENG ROLL STCK PUR- BALLAST CARS-360 | Units not applicable | 10/1/2020 | 9/30/2021 | \$25,094,22 |
| | | | | |

| nvestment Description and FY21 Scope | Units | Start Date | End Date | FY21 Budge |
|--|--|-------------------------|---------------------------|-------------------|
| C.EN.101757.0008 EQIR ENG ROLLING STOCK PUR-SIDE DUMPS-60 | | | | |
| C.EN.101757.0008 EQIR ENG ROLLING STOCK PUR-SIDE DUMPS-60 | Units not applicable | 10/1/2020 | 9/30/2021 | \$5,420,897 |
| EQIR ENG EQUIP PURCHASE 32T TAMPER For the purchase of a 32 CAT Tamper to planned for the Surfacing gang (TLS) - if needed they will be moved in the future to | | Way capital and maint | tenance projects. This | equipment is |
| C.EN.101757.0010 EQIR ENG EQUIP PURCHASE 32T TAMPER | | | | |
| C.EN.101757.0010 EQIR ENG EQUIP PURCHASE 32T TAMPER | Units not applicable | 10/1/2020 | 9/30/2021 | \$3,226,912 |
| EQIR ENG EQUIP PURCHASE TIE CRANE-2 For the purchase of a two (2) Tie handli for the Head End gang (UC) - if needed they will be moved in the future to other ga | | capital and Maintenar | nce projects. This equ | ipment is planned |
| C.EN.101757.0013 EQIR ENG EQUIP PURCHASE TIE CRANE-2 | | | | |
| C.EN.101757.0013 EQIR ENG EQUIP PURCHASE TIE CRANE-2 | Units not applicable | 10/1/2020 | 9/30/2021 | \$1,652,559 |
| EQIR ENG EQUIP PURCHASE 04S TAMPER-2 For the purchase of two (2) 04S Tamp Surfacing - if needed they will be moved in the future to other gangs. | er for MW capital and maintenance | projects. This equipm | nent is planned for the | e High Speed |
| C.EN.101757.0025 EQIR ENG EQUIP PURCHASE 04S TAMPER-2 | | | | |
| C.EN.101757.0025 EQIR ENG EQUIP PURCHASE 04S TAMPER-2 | Units not applicable | 10/1/2020 | 9/30/2021 | \$7,365,46 |
| EQIR ENG EQUIP PUR BALLAST MANAGEMENT-3 For the purchase of two (2) Balla Reference Surfacing - if needed they will be moved in the future to other gangs. | ast Management for MW capital and | l maintenance project | s. This equipment is p | olanned for the |
| C.EN.101757.0034 EQIR ENG EQUIP PUR BALLAST MANAGEMENT-3 | | | | |
| C.EN.101757.0034 EQIR ENG EQUIP PUR BALLAST MANAGEMENT-3 | Units not applicable | 10/1/2020 | 9/30/2021 | \$7,289,95 |
| EQIR ENG EQUIP PURCHASE STABILIZER-2 For the purchase of two (2) Stabilizers f Surfacing - if needed they will be moved in the future to other gangs. | for MW capital and maintenance pro | ojects. This equipment | t is planned for the hi | gh Speed |
| C.EN.101757.0036 EQIR ENG EQUIP PURCHASE STABILIZER-2 | | | | |
| C.EN.101757.0036 EQIR ENG EQUIP PURCHASE STABILIZER-2 | Units not applicable | 10/1/2020 | 9/30/2021 | \$2,356,97 |
| EQIR ENG EQUIP PURCHASE-KIROW CRANE SYS For the purchase of a new Kirow | Crane system - which includes The | Crane, the 2 tilt cars, | and the lifting beam. | |
| C.EN.101757.0037 EQIR ENG EQUIP PURCHASE-KIROW CRANE SYS | | | | |
| C.EN.101757.0037 EQIR ENG EQUIP PURCHASE-KIROW CRANE SYS | Units not applicable | 10/1/2020 | 9/30/2021 | \$2,544,45 |
| EQIR ENG ROLL STCK PURCH MFS40 CARS-50 For the purchase of 50 MFS40 Balla Equipment Plan Cost is $50 \times \$850,000 = \$42,500,000$. | ast Cars to support work along Amtr | rak's Undercutter ganç | gs. It is part of the 5 y | rear M/W Capital |
| C.EN.101757.0038 EQIR ENG ROLL STCK PURCH MFS40 CARS-50 | | | | |
| C.EN.101757.0038 EQIR ENG ROLL STCK PURCH MFS40 CARS-50 | Units not applicable | 10/1/2020 | 9/30/2021 | \$749,94 |
| EQIR ENG EQUIP PURCHASE BRANDT TRUCK-3 For the purchase of three (3) Brangang and 2 Undercutting gangs - if needed they will be moved in the future to other | dt Trucks for MW capital and mainte er gangs. | enance projects. This e | equipment is planned | for the 1 TLS |
| C.EN.101757.0041 EQIR ENG EQUIP PURCHASE BRANDT TRUCK-3 | | | | |
| C.EN.101757.0041 EQIR ENG EQUIP PURCHASE BRANDT TRUCK-3 | Units not applicable | 10/1/2020 | 9/30/2021 | \$3,214,05 |
| G00053 - Engineering Equipment Heavy Overhaul - C.EN.100157 | | | | |
| Heavy Overhaul of the following Engineering Roadway Machines: N25001 Track Lay A18301 Portal Crane, A18302 Portal Crane, A18101 Raupenwagon, A18102 Rauper Remover, A21919 Tie Inserter/Remover, A21920 Tie Inserter/Remover, A11270 HST Applicator, A25310 Fast Clip Applicator, A10806, A14644 BMS100, & A14645 BMS | nwagon, A21916 Tie Inserter/Remov Tamper, A10107 HST Tamper, A232 | er, A21917 Tie Inserte | er/Remover , A21918 | Tie Inserter/ |
| Engineering Equipment Overhaul - Heavy Overhaul | | | | |
| C.EN.100157.0001 EQIRCATCAR- HEAVY OVERHAUL LBR | Units not applicable | 10/1/2020 | 9/28/2021 | \$9,651,60 |
| G00054 - Engineering Equipment Acquisition - C.EN.100285 | | | | |
| Acquisition of various pieces of M/W equipment to attempt to bring the M/W Equip | oment fleet to a state of good repair | - | | |
| Undercutter Rebuild | | | | |
| C.EN.100285.0001 EQIR UNDERCUTTER REBUILD | Units not applicable | 10/1/2020 | 9/28/2021 | \$14,552,14 |
| G00056 - Engineering Vehicle Acquisition - C.EN.101455 | | | | |
| 7 upgraded Class J2 trucks, 2 class N9 trucks, 2 Class N7 trucks, 1 Class G9 truck, 5 | Brandt Trucks, and 5 lease buyouts. | | | |
| Undercutter Rebuild | | | | |
| | | | | |

| vestment Description and FY21 Scope | Units | Start Date | End Date | FY21 Budget |
|--|----------------------|----------------|----------------|---------------|
| Engineering Vehicle Purchase - Boom Truck | | | | |
| C.EN.101455.0067 EQIV ENG EQUIP PURCHASE BOOM TRUCK-2 | Units not applicable | 10/1/2020 | 12/31/2020 | \$804,300 |
| Engineering Vehicle Purchase - Fuel/Truck | | | | |
| C.EN.101455.0069 EQIV ENG EQUIP PURCHASE FUEL/LUBE TRUCK | Units not applicable | 10/1/2020 | 12/31/2020 | \$246,652 |
| Engineering Vehicle Purchase - Hirail Truck | | | | |
| C.EN.101455.0001 EQIV VEHICLE ACQ-HIRAIL AERAIL TRUCKS-18 | Units not applicable | 10/1/2020 | 9/28/2021 | \$5,109,363 |
| Engineering Vehicle Purchase - Welding Truck | | | | |
| C.EN.101455.0064 EQIV ENG EQUIP PUR THERMITE WELD TRUCK-5 | Units not applicable | 10/1/2020 | 12/31/2020 | \$1,394,120 |
| C.EN.101455.0065 EQIV ENG EQUIP PURCH E/A WELDING TRUCK-2 | Units not applicable | 10/1/2020 | 7/2/2021 | \$514,753 |
| G00057 - TLS Concrete Tie Replacement - C.EN.101652 | | | | |
| 80,134 Concrete Ties; 320,534 FT CWR | | | | |
| Survey & Design | | | | |
| 901652.9001 TLS AMTRAK SYSTEM - SURVEY & DESIGN | Units not applicable | 10/1/2020 | 9/30/2021 | \$241,29 |
| 600089-NEC Trip Time Reduction-C.EN.101909 | | | | |
| Increase speed from 80 mph to 110 mph on Track #1 between Bacon and Davis Intelocations where the current MAS is 150 mph near Route 128 in Kingston, RI. Increas | | | | |
| Design | | | | |
| Final Design | Units not applicable | 10/1/2020 | 9/30/2021 | \$275,413 |
| Force Account | | | | |
| AMTRAK CONSTRUCTION (F/A) | Units not applicable | 10/1/2020 | 9/30/2021 | \$1,066,257 |
| Project Management | | | | |
| Project management | Units not applicable | 10/1/2020 | 9/30/2021 | \$41,740 |
| | | BCC Segment 31 | Programs Total | \$141,491,994 |

Projects


| Investment Description and FY21 Scope | Start Date | End Date | FY21 Budget | |
|---|------------|-----------|-------------|--|
| BCC Eligible | | | | |
| P000016 - Sunnyside Yard Service Platform Upgrade - C.EN.101433 | | | | |
| Replacement of steel plates and concrete patching that required immediate attention to address safety concerns. | | | | |
| C.EN.101433.0009 MOFW SSYD PLTFRM REHAB/WATER SERVICE F/A | 12/1/2020 | 3/2/2023 | \$360,326 | |
| P000030 - PTC NEC Secure Wireless Communications Installation - C.EN.101537 | | | | |
| FY21 Scope not available. | | | | |
| C.EN.101537.0008 PTC PHASE 2 TASK 4- INTEROP/MAINT | 11/2/2020 | 1/28/2022 | \$378,950 | |
| C.EN.101537.0009 PTC SECURE WIRELESS COMM-PRJ MGT. | 11/1/2019 | 7/31/2020 | \$38,103 | |
| P000077 - Sunnyside Yard Frequency Converter Upgrade - C.EN.101239 | | | | |
| Complete 30% preliminary engineering design and commence procurement of a Design Build contractor | | | | |
| C.EN.101239.7201 FREQ SSYD-CONVERTER RPL PROJECT SUPPORT | 10/1/2020 | 2/26/2025 | \$19,305 | |
| P000085 - Washington to Boston ARINC to AMTEC Software Upgrade - C.EN.101767 | | | | |

Tables include a subset of submitted capital renewal data. For complete details including BCC segment breakdown, go to nec-commission.com.

Design to 60%, AMTEC software for Chicago dispatching office. Develop and complete an AMTEC ET SCADA interface software for Boston and Wilmington dispatching offices. Develop and complete IETMS software interface for Wilmington and Chicago dispatching offices, required for PTC implementation.

| Investment Description and FY21 Scope | Start Date | End Date | FY21 Budget | | | |
|--|----------------------|-------------------------|-------------------|--|--|--|
| C.EN.101767.0010 CETC NEW ENG DIV-AMTEC UPG PRJ MGT. | 10/1/2020 | 4/29/2022 | \$92,012 | | | |
| C.EN.101767.0011 CETC NEW ENG DIV-AMTEC UPG TRAINING | 1/4/2021 | 2/1/2021 | \$23,280 | | | |
| PH C.EN.101767.0013 CETC-NED/MAD-AMTEC SCADA/IETMS PRELM DSGN | 10/1/2020 | 12/31/2020 | \$46,521 | | | |
| PH C.EN.101767.0014 CETC-NED/MAD-AMTEC SCADA/IETMS FINAL DSGN | 1/4/2021 | 9/30/2021 | \$108,552 | | | |
| PH C.EN.101767.0015 CETC-NED/MAD-AMTEC SCADA/IETMS INSTALL | 1/4/2021 | 6/30/2021 | \$920,856 | | | |
| 000109 - Brill to Landlith OCS Improvements - C.EN.101880 | | | | | | |
| Initiate preliminary design to be contracted out, advance the design to a conceptual design and prepare NEPA, environmental & SHPO documents. | | | | | | |
| C.EN.101880.0001 CAT BRILL/LANDLITH RENEW-CONCEPT DESIGN | 10/1/2020 | 4/15/2021 | \$949,071 | | | |
| C.EN.101880.0002 CAT BRILL/LANDLITH RENEW-PRELIM DESIGN | 11/3/2020 | 11/24/2021 | \$1,067,873 | | | |
| C.EN.101880.0003 CAT BRILL/LANDLITH RENEW-DESIGN REVIEW | 10/1/2020 | 11/24/2021 | \$157,657 | | | |
| C.EN.101880.0004 CAT BRILL/LANDLITH RENEW-RWP/FLAG SUPP | 10/1/2020 | 11/24/2021 | \$166,313 | | | |
| C.EN.101880.8000 CAT BRILL/LANDLITH RENEW-PROJ. MGMT. | 10/1/2020 | 7/23/2027 | \$2,346,660 | | | |
| P000112 - Penn Coach Yard High Mast Lighting - C.EN.101874 | | | | | | |
| Procure and award a design contract, develop the design and procure a construction contractor. | | | | | | |
| C.EN.101874.0001 MOFW PCY PA HIGH MAST LIGHT-PRELIM ENG. | 12/1/2020 | 12/31/2020 | \$32,172 | | | |
| C.EN.101874.0002 MOFW PCY PA HIGH MAST LIGHT-FINAL DESIGN | 3/30/2021 | 9/8/2021 | \$112,601 | | | |
| C.EN.101874.0003 MOFW PCY PA HIGH MAST LIGHT-CONSTRUCTION | 2/1/2021 | 9/23/2021 | \$950,657 | | | |
| C.EN.101874.0004 MOFW PCY PA HIGH MAST LIGHT-CNSTRUCT MGT | 2/1/2021 | 9/23/2021 | \$58,769 | | | |
| C.EN.101874.0005 MOFW PCY PA HIGH MAST LIGHT-PROJECT MGT | 12/1/2020 | 8/26/2021 | \$26,809 | | | |
| P000114 - Penn Coach Yard Water Main Replacement - C.EN.101876 | | | | | | |
| Procure and award a design contract, develop the design and procure a construction contractor. | | | | | | |
| C.EN.101876.2100 MOFW PENN COACH YD WATER MAIN-60% DSN | 10/1/2020 | 12/29/2020 | \$160,860 | | | |
| C.EN.101876.2400 MOFW PENN COACH YD WATER MAIN-DSN REVW | 10/1/2020 | 12/29/2020 | \$20,376 | | | |
| C.EN.101876.7100 MOFW PENN COACH YD WATER MAIN-PM | 10/1/2020 | 9/29/2022 | \$33,247 | | | |
| P000120 - Mid-Atlantic South Signal System Upgrades to 562 - C.EN.101872 | | | | | | |
| Design of two segments for 562 upgrades- Magnolia to Wood, and CP Ave to Landover. Construction of 562 upgrareplacement with new switch and signal cables and new track wires, and interlocking signals replacement. | des from Bush to Mag | gnolia, including Switc | h and signal case | | | |
| C.EN.101872.9000 ABS MADS CONVERT TK CIRCUITS 562-PM | 10/1/2020 | 9/30/2024 | \$187,670 | | | |
| P000158 - Electric Traction System Aerial System Assessment - C.EN.101809 | | | | | | |
| FY21 scope includes capturing 5000 Structures and entering into existing database | | | | | | |
| C.EN.101809.0001 CAT ET SYS AERIAL ASSESSMENT-CONTRACTOR | 10/1/2020 | 9/27/2024 | \$1,951,769 | | | |
| C.EN.101809.0002 CAT ET SYS AERIAL ASSESSMENT-PROJ. MGT. | 10/1/2020 | 9/27/2024 | \$26,810 | | | |
| P000160 - Movable Point Frog Switch Machine Rod Replacement - C.EN.101894 | | | | | | |
| The FY 21 scope is to complete the remaining 54 turnouts. | | | | | | |
| C.EN.101894.0015 INT MPF HST ROD REPLACE-PROJ. MGMT. | 10/1/2020 | 9/29/2021 | \$55,570 | | | |
| BCC Ineligible | | | | | | |

| Investment Description and FY21 Scope | Start Date | End Date | FY21 Budget | | |
|---|-------------------------------|-----------|-------------|--|--|
| P000135 - Penn Coach Yard Paving Improvements - C.EN.101807 | | | | | |
| Complete design, obtain permits, procure a construction contractor and construction management support. | | | | | |
| C.EN.101807.2100 MOFW PCY PAVING/DRAINAGE IMPRV 60% DSN | 10/1/2020 | 8/18/2021 | \$171,588 | | |
| C.EN.101807.2400 MOFW PCY PAVING/DRAIN IMPRV DSN REVIEW | 8/19/2021 | 9/30/2021 | \$21,448 | | |
| C.EN.101807.7100 MOFW PCY PAVING/DRAINAGE IMPRV PM | 10/1/2020 | 6/29/2023 | \$65,731 | | |
| P000151 - Acela 21 Electric Traction - Load Flow Study - C.EN.101887 | | | | | |
| Study ET system capacity and the impacts of the Acela 21 operating plan to ensure ET infrastructure can support the roll-out and full deployment of the new fleet. The Scope of work is to perform an entire analysis on the 25Hz Electric Traction system and identify potential problem areas, identify capacity shortfalls, and make recommendations for upgard capacity enhancements. The Scope of this applies only to the Electric Traction system South of Bowery Bay (Hell Gate Line) phase break in New York to the end of catenary the First Street Tunnel, South of Washington Union Station, as well as West to Harrisburg. | | | | | |
| C.EN.101887.0001 TRN ACELA 21 E.T. LOAD FLOW STUDY-CONCEP | 10/1/2020 | 8/23/2021 | \$368,539 | | |
| C.EN.101887.0002 TRN ACELA 21 E.T. LOAD FLOW STUDY-PM | 10/1/2020 | 8/30/2021 | \$10,725 | | |
| P000178-MofE- ICT Facility Program - Program Management-C.EN.101907 | | | | | |
| FY21 Scope not available. | | | | | |
| C.EN.EEEEEE.0002 – Project Management | 10/1/2020 | 9/30/2027 | \$604,190 | | |
| C.EN.EEEEEE.0003 – Project/Program Support | 10/1/2020 | 9/30/2027 | \$269,344 | | |
| | BCC Segment 31 Projects Total | | | | |

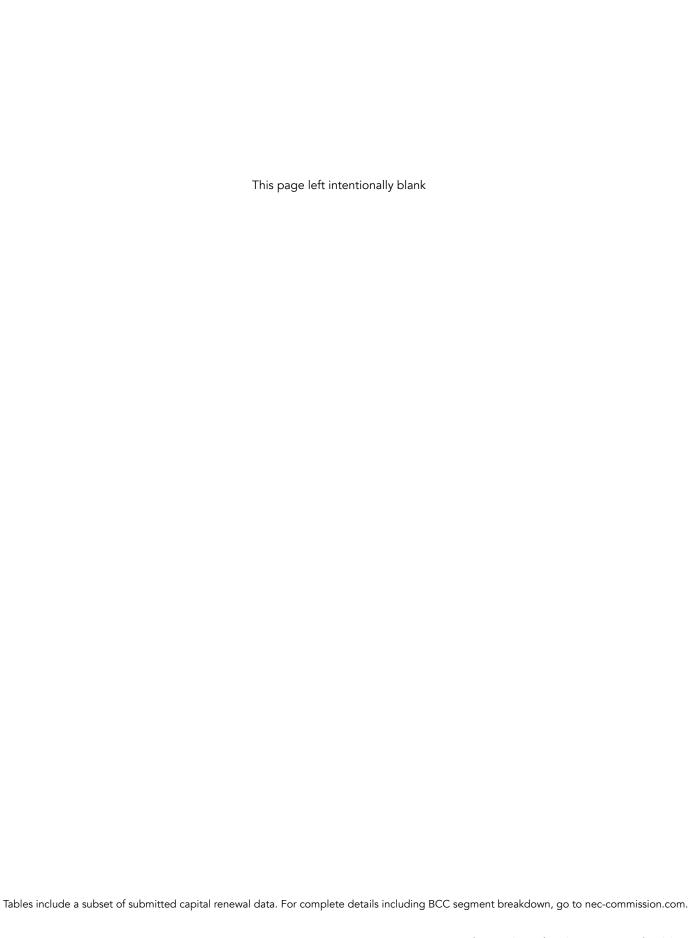

FY21-25 Capital renewal plans by owner

MBTA FY21-25 capital renewal plan

| Name/title (description) | BCC- Eligibility | FY21 Scope | FY21 Units | FY21 Schedule | FY21 Budget |
|---|---------------------|--|-----------------------|--------------------------------------|-------------|
| Battery Bank Replacement Program | BCC Eligible | Replace Battery Banks at Interlockings between MP190.9 - MP229.0 | 1 Lump Sum | October 1, 2020 - September 30, 2021 | \$138,880 |
| Concrete Tie Replacement Program | BCC Eligible | | | | \$0 |
| CWR Replacement Program | BCC Eligible | 4000 LF Rail - Location TBD | 4000 LF | June 1, 2021 - August 31, 2021 | \$715,000 |
| Emergency Egress Upgrades Project | BCC Eligible | Complete the installation of new enclosures with vertical doors at six emergency egress locations. | 6 Locations | October 1, 2020 - September 30, 2021 | \$1,000,000 |
| Fuse Upgrade Program | BCC Eligible | Upgrade to slow burn fuses at interlockings between MP190.9 - MP229.0. | 1 Lump Sum | October 1, 2020 - September 30, 2021 | \$146,556 |
| Gas Hot Air Switch Blower Program | BCC Eligible | Install Gas Hot Air Blower Switch Heaters (4 Units) - Location TBD | 4 Units | April 1, 2021 - September 30, 2021 | \$450,000 |
| Hawk Hot Box / Dragging Equipment Detector Upgrade Project | BCC Eligible | Procure the equipment and install the replacement hot box / dragging equipment detector at MP208.7. | 1 Units | April 1, 2021 - September 30, 2021 | \$300,000 |
| Insulated Joint Program | BCC Eligible | 20 Insulated Joints - MP190.9 - MP229.0 | 20 Units | October 1, 2020 - September 30, 2021 | \$194,195 |
| Interlocking Crossover Replacement Program | BCC Eligible | Transfer 13 Turnout Replacement | 1 Turnout | July 1, 2021 - August 31, 2021 | \$750,000 |
| Interlocking RTU Upgrades Project | BCC Eligible | Complete the upgrades of remote terminal units at Hebronville I/L, Holden I/L, Junction I/L, and Mansfield I/L. | 1 Lump Sum | October 1, 2020 - September 30, 2021 | \$481,087 |
| Interlocking Signal System Upgrades Program | BCC Eligible | No work planned in FY21 under this program. | | | \$0 |
| Interlocking Steel Replacement Program | BCC Eligible | Replace 5 Units Interlocking Steel - MP190.9 - MP229.0 | 5 Units | October 1, 2020 - September 30, 2021 | \$276,067 |
| Joint Elimination Program | BCC Eligible | 50 Thermite Welds - MP190.9 - MP229.0 | 50 Units | October 1, 2020 - September 30, 2021 | \$269,250 |
| M3 Switch Machine Program | BCC Eligible | Upgrade to M3 Switch Machines at 8 locations between MP190.9 and MP229.0. | 8 Units | October 1, 2020 - September 30, 2021 | \$375,995 |
| Out Of Face Surfacing Program | BCC Eligible | 100,000 Pass-Feet of Out-of-Face High Speed Surfacing - MP190.9 - MP229.0 | 100,000 Pass- Feet | October 1, 2020 - September 30, 2021 | \$1,076,891 |
| Power and Express Cable Upgrade Project | BCC Eligible | Complete the installation of 21,000 feet of power, express, and communication cable between Read I/L and Forest I/L. | 1 Lump Sum | October 1, 2020 - December 31, 2020 | \$1,000,000 |
| RoW Fence Upgrades Program | BCC Eligible | Install impasse fence in Hyde Park, MA along Track 3. | 2,800 Linear Feet | October 1, 2020 - December 31, 2020 | \$1,250,000 |
| Rail Grinding Program | BCC Eligible | | | | \$0 |
| Readville Material Control Warehouse Project | BCC Eligible | Complete the design and construction of a material control warehouse at Yard 5, Readville, MA. | 1 Lump Sum | October 1, 2020 - September 30, 2021 | \$1,545,697 |

| FY22 Scope | FY22 Units | FY22 Schedule | FY22 Budget | FY23 Budget | FY24 Budget | FY25 Budget |
|--|-----------------------|---|-------------|--------------|--------------|-------------|
| Replace Battery Banks at Interlockings between MP190.9 - MP229.0 | 1 Lump Sum | October 1, 2021 - September 30, 2022 | \$1,240,000 | \$167,000 | \$0 | \$0 |
| | | | \$0 | \$18,000,000 | \$18,000,000 | \$0 |
| 4000 LF Rail - Location TBD | 4000 LF | June 1, 2022 - August 30, 2022 | \$730,000 | \$745,000 | \$760,000 | \$782,800 |
| Complete the installation of new enclosures with vertical doors at six emergency egress locations. | 6 Locations | October 1, 2021 - September 30, 2022 | \$1,000,000 | \$1,000,000 | \$0 | \$0 |
| | | | \$0 | \$0 | \$0 | \$0 |
| Install Gas Hot Air Blower Switch Heaters (4 Units) - Location TBD | 4 Units | October 1, 2021 - September 30, 2022 | \$500,000 | \$550,000 | \$600,000 | \$625,000 |
| | | | \$0 | \$0 | \$0 | \$0 |
| 20 Insulated Joints - MP190.9 - MP229.0 | 20 Units | October 1, 2021 - September 30, 2022 | \$199,050 | \$204,027 | \$209,127 | \$215,400 |
| Interlocking Crossover Replacements - Locations TBD | 2 Units | October 1, 2021 - September 30, 2022 | \$2,100,000 | \$4,000,000 | \$3,250,000 | \$0 |
| | | | \$0 | \$0 | \$0 | \$0 |
| Placeholder for interlocking signal system upgrades at Read I/L and Plains I/L | | October 1, 2021 - September 30, 2022 | \$5,000,000 | \$5,000,000 | \$5,000,000 | \$5,000,000 |
| Replace 5 Units Interlocking Steel - MP190.9 - MP229.0 | 5 Units | October 1, 2021 - September 30, 2022 | \$284,349 | \$292,880 | \$301,666 | \$310,715 |
| 50 Thermite Welds - MP190.9 - MP229.0 | 50 Units | October 1, 2021 - September 30, 2022 | \$276,000 | \$283,000 | \$290,000 | \$298,700 |
| Upgrade to M3 Switch Machines at 8 locations between MP190.9 and MP229.0. | 8 Units | October 1, 2021 - September 30, 2022 | \$385,395 | \$395,029 | \$404,905 | \$417,052 |
| 100,000 Pass-Feet of Out-of-Face High Speed Surfacing - MP190.9 - MP229.0 | 100,000 Pass- Feet | October 1, 2021 - September 30, 2022 | \$1,105,592 | \$1,133,232 | \$1,161,563 | \$1,196,409 |
| | | | \$0 | \$0 | \$0 | \$0 |
| Install impasse fence in Hyde Park, MA along Track 1. | 3,200 Linear Feet | October 1, 2021 - September 30, 2022 | \$1,400,000 | \$1,250,000 | \$1,250,000 | \$1,250,000 |
| Rail Grinding - Location TBD | 1 Lump Sum | May 1, 2022 - June 30, 2022 | \$250,000 | \$0 | \$0 | \$250,000 |
| | | | \$0 | \$0 | \$0 | \$0 |

MBTA capital renewal plan continued on the next page >>>

MBTA FY21-25 capital renewal plan (continued)

| Name/title (description) | BCC- Eligibility | FY21 Scope | FY21 Units | FY21 Schedule | FY21 Budget |
|---|---------------------|---|---------------------|--------------------------------------|--------------|
| South Station Tie and Rail Replacement Project | BCC Eligible | Complete the upgrade to concrete guardrail ties and replace the rail, clip, pads, insulators, and ballast to Tracks 1-2 at South Station. | 1,534 Track Feet | August 1, 2021 - September 30, 2021 | \$2,726,887 |
| Southampton Street and South Bay I/L Upgrades Project | BCC Eligible | Begin the design phase for the South Bay I/L upgrades and backup generators. Procure and install DTMF switches at Southampton Street Yard. Procure and install transformer at South Bay I/L. | 1 Lump Sum | October 1, 2020 - September 30, 2021 | \$2,885,148 |
| Spot Surfacing Program | BCC Eligible | 60,000 Feet of Spot Surfacing - MP190.9 - MP229.0 | 60,000 Feet | October 1, 2020 - September 30, 2021 | \$1,725,895 |
| Spot Undercutting Program | BCC Eligible | 150 Feet of Spot Undercutting - MP190.9 - MP229.0 | 150 Feet | October 1, 2020 - September 30, 2021 | \$303,469 |
| Switch Heater Cabinet / Control Program | BCC Eligible | Replace Switch Hear Cabinet / Controls - Plains I/L | 1 Units | June 1, 2021 - August 31, 2021 | \$350,000 |
| TAMS Upgrades Project | BCC Eligible | Upgrade TAMS system at Canton Junction Station (Canton, MA), MP 213.7, Ruggles Street Station (MP226.4), Forest Hills Station (MP223.8), Mansfield Station (MP204.0), and Sharon Station (MP210.6). | 1 Lump Sum | October 1, 2020 - September 30, 2021 | \$3,228,565 |
| Tie/Timber Program | BCC Eligible | Replace 800 ties/timbers - MP190.9 - MP229.0 | 800 Units | October 1, 2020 - September 30, 2021 | \$686,687 |
| Track Circuit Protection Program | BCC Eligible | Surge Protector replacements between MP190.9 and MP229.0. | 1 Lump Sum | October 1, 2020 - September 30, 2021 | \$100,000 |
| Track Lead Replacement Program | BCC Eligible | Replace Track Leads between MP190.9 and MP229.0 | 1 Lump Sum | October 1, 2020 - September 30, 2021 | \$370,000 |
| Tree Cutting Program | BCC Eligible | 50 weeks tree cutting program - MP190.9 - MP229.0 | 50 Weeks | October 1, 2020 - September 30, 2021 | \$1,050,625 |
| Undergrade Bridge Upgrades Program | BCC Eligible | Complete upgrades and retirements of undergrade bridges at locations TBD. | 1 Lump Sum | October 1, 2020 - September 30, 2021 | \$360,858 |
| Undgergrade Bridge Upgrades Program | BCC Eligible | Install anti-graffitti coating installed at four undergrade bridges (MP203.85, MP204.44, 206.42, and MP212.02). | 4 Locations | April 1, 2021 - September 30, 2021 | \$454,135 |
| Total | | | | | \$24,211,887 |

Note: MBTA plans to spend approximately \$11 million on the Special Project "Tower 1 Interlocking" (see pg. 208) during FY21. As all of the planned work on Tower One is considered BCC-eligible, MBTA can put any remaining FY21 BCCs towards that project, if needed.

| FY22 Scope | FY22 Units | FY22 Schedule | FY22 Budget | FY23 Budget | FY24 Budget | FY25 Budget |
|--|----------------------|---|--------------|--------------|--------------|--------------|
| Complete the upgrade to concrete guardrail ties and replace the rail, clip, pads, insulators, and ballast to Tracks 3-13 at South Station. | 10,986 Track Feet | October 1, 2021 - August 31, 2022 | \$17,677,211 | \$0 | \$0 | \$0 |
| Complete the design and begin the installation of upgrades at South Bay I/L and backup generators. | 1 Lump Sum | October 1, 2021 - September 30, 2022 | \$1,657,129 | \$4,149,912 | \$0 | \$0 |
| 60,000 Feet of Spot Surfacing - MP190.9 - MP229.0 | 60,000 Feet | October 1, 2021 - September 30, 2022 | \$1,777,672 | \$1,831,002 | \$1,885,933 | \$1,942,510 |
| 150 Feet of Spot Undercutting - MP190.9 - MP229.0 | 150 Feet | October 1, 2021 - September 30, 2022 | \$312,601 | \$321,979 | \$331,638 | \$341,587 |
| Replace Switch Hear Cabinet / Controls - Location TBD | 1 Units | October 1, 2021 - September 30, 2022 | \$358,750 | \$367,719 | \$376,912 | \$0 |
| Upgrade TAMS system at South Attleboro Station (MP191.7) and Hyde Park Station (MP220.4). | 1 Lump Sum | October 1, 2021 - December 31, 2021 | \$855,402 | \$0 | \$0 | \$0 |
| Replace 800 ties/timbers - MP190.9 - MP229.0 | 800 Units | October 1, 2021 - September 30, 2022 | \$703,855 | \$721,451 | \$739,487 | \$761,671 |
| | | | \$0 | \$0 | \$0 | \$0 |
| | | | \$0 | \$0 | \$0 | \$0 |
| 50 weeks tree cutting program - MP190.9 - MP229.0 | 50 Weeks | October 1, 2021 - September 30, 2022 | \$1,076,891 | \$1,103,813 | \$1,131,408 | \$1,165,350 |
| Complete upgrades and retirements of undergrade bridges at locations TBD. | 1 Lump Sum | October 1, 2021 - September 30, 2022 | \$426,930 | \$347,989 | \$395,358 | \$0 |
| Install anti-graffiti coating installed at four undergrade bridges - locations TBD. | 4 Locations | October 1, 2021 - September 30, 2022 | \$465,489 | \$477,126 | \$0 | \$0 |
| | | | \$39,782,316 | \$42,341,159 | \$36,087,997 | \$14,557,194 |

Connecticut DOT FY21-25 capital renewal plan

| Name/title (description) | BCC-Eligibility | FY21 Budget | FY22 Budget | FY23 Budget | FY24 Budget | FY25 Budget |
|--|--|--------------|------------------------|---------------------------------|--------------------------------|--------------|
| NHL - ALL Movable Bridge Repairs | BCC Eligible | \$12,000,000 | \$15,000,000 | \$18,000,000 | \$18,000,000 | \$20,000,000 |
| FY21 Scope, Budget, Units, Schedule Det | ails | | | | | |
| Cos Cob Interim Repairs (DOT03010173CN). | Complete Design and begin procurement with Metro North | \$6,000,000 | Units not available | 30% Design C Construction in | | |
| SAGA Interim Repairs (DOT03010177CN). | Complete Design and begin procurement with Metro North | \$6,000,000 | Units not available | 30% Design in Construction i | September 2020, n 2022-2023 | |
| NHL CT - Bridge Design | BCC Eligible | \$3,200,000 | \$3,600,000 | \$4,000,000 | \$4,500,000 | \$5,000,000 |
| FY21 Scope, Budget, Units, Schedule Det | <u>ails</u> | | | | | |
| DOT03000175PE (Bridge Design). | On-going Program | \$3,200,000 | Units not available | On-going Prog | gram | |
| NHL CT - Bridge Replacement/Repair Program | BCC Eligible | \$8,000,000 | \$10,000,000 | \$25,000,000 | \$30,000,000 | \$40,000,000 |
| FY21 Scope, Budget, Units, Schedule Det | ail <u>s</u> | | | | | |
| NHL CT - Bridge Replacement/Repair Program | On-going Program | \$8,000,000 | Units not available | On-going Prog | gram | |
| NHL CT - Bridges - Atlantic Street Bridge, Stamford including Yard/Platform/Catenary | BCC Eligible | \$20,000,000 | \$15,000,000 | \$5,000,000 | \$0 | \$0 |
| FY21 Scope, Budget, Units, Schedule Det | ail <u>s</u> | | | | | |
| NHL CT - Bridges - Atlantic Street Bridge, Stamford including Yard/ Platform/Catenary | Complete Construction of Bridge, Begin catenary modifications | \$20,000,000 | Units not available | Catenary Work | « Complete 2023 | |
| NHL CT - Bridges - East Ave, Osbourne and Fort Point Bridges | BCC Eligible | \$10,000,000 | \$35,000,000 | \$35,000,000 | \$35,000,000 | \$35,000,000 |
| FY21 Scope, Budget, Units, Schedule Det | ails | | | | | |
| NHL CT - Bridges - East Ave, Osbourne and Fort Point Bridges | Begin utility relocations | \$10,000,000 | Units not available | Construction (| Complete 2025 | |
| NHL CT - Bridges - Main Street Stratford, East Main Street Stratford | BCC Eligible | \$0 | \$0 | \$0 | \$0 | \$8,000,000 |
| NHL CT - Catenary Replacement - Segments C1A and C2 - Construction (DOT03010145CN). Replacement of existing Catenary with Auto-Tension Catenary CP-241 to CP248(C1A) and CP255 to CP261(C2) | BCC Eligible | \$5,000,000 | \$3,000,000 | \$0 | \$0 | \$0 |
| FY21 Scope, Budget, Units, Schedule Det | ails | | | | | |
| Segments C1A and C2 - Construction (DOT03010145CN). | Track 4 will be completed in sections C1A and C2. Conductor Rail installation on tracks 3 and 1 for section C2 on Devon Bridge. Project will be completed. | \$5,000,000 | Units not available | Complete Cor | nstruction 9/1/202 | 1 |
| NHL CT - Catenary Section A SOGR | BCC Eligible | \$0 | \$0 | \$0 | \$5,000,000 | \$10,000,000 |

| Name/title (description) | BCC-Eligibility | FY21 Budget | FY22 Budget | FY23 Budget | FY24 Budget | FY25 Budget |
|---|--|--------------|---|---|--------------------|--------------|
| NHL CT - Network Infrastructure Upgrade - All Phases | BCC Eligible | \$12,000,000 | \$12,000,000 | \$14,000,000 | \$16,000,000 | \$18,000,000 |
| FY21 Scope, Budget, Units, Schedule Deta | ails | | | | | |
| DOT03000150CN (Network Infrastructure Upgrade) | Project Complete | \$0 | Units not available | Project Complete | | |
| DOT03000178CN (Network Infrastructure Upgrade Phase 2). | Continue Construction | \$3,000,000 | Units not available | Project compl | etion Dec. 2020 | |
| DOT03000178PE (Network Infrastructure Upgrade Phase 2). | Design Phase is complete | \$0 | Units not available | Design Comp | lete | |
| DOT03000202CN (Network Infrastructure Upgrade Phase 3). | On-going Construction | \$3,000,000 | Units not available | Project Comp | letion Dec 2021 | |
| DOT03000202PE (Network Infrastructure Upgrade Phase 3). | Design Phase is complete | \$3,000,000 | Units not available | Design Comp | lete | |
| DOT03000215CN (Network Infrastructure Upgrade Phase 4). | No Activity | \$0 | Units not available | Schedule TBD | | |
| DOT03000215PE (Network Infrastructure Upgrade Phase 4). | Preliminary Engineering | \$3,000,000 | Units not available | Design Comp | lete 2022 | |
| NHL CT - Signal System Replacement Future Phases | BCC Eligible | \$0 | \$10,000,000 | \$15,000,000 | \$18,000,000 | \$18,000,000 |
| NHL CT - Signal System Replacement Phase 1 | BCC Eligible | \$10,000,000 | \$10,000,000 | \$10,000,000 | \$0 | \$0 |
| FY21 Scope, Budget, Units, Schedule Deta | ails | | | | | |
| DOT03010154CN (Signal System). | On-going Construction | \$5,000,000 | Units not available | Project Comp | lete December 20 | 20 |
| DOT03010XXXCN (Signal System Phase 2, 3/4). | Preliminary Engineering | \$5,000,000 | Units not available | Design Comp | lete 8/2024 | |
| NHL CT - Track Program (C Program) | BCC Eligible | \$22,000,000 | \$22,000,000 | \$24,000,000 | \$26,000,000 | \$28,000,000 |
| FY21 Scope, Budget, Units, Schedule Deta | ails | | | | | |
| C-30 (DOT03000182CN). | Purchase and install concrete and wood ties, undercut tracks, surface track, purchase 32 track miles of new 136lb rail for various curve, purchase and install switch at CP234. | \$0 | Units not available | Project Comp | lete in Closeout | |
| C-31 (DOT03000190CN). | Purchase and install wood ties, surface track, install 17.6 track miles of new 136lb rail for various curves, purchase and install Switch at CP 272. MP 26 - MP 72 | \$1,000,000 | Install wood ties; Rail Installation; Switch replacement CP 272; Out of Face Surfacing | 12/31/20 com | pletion | |
| C-32 (DOT03000206CN). | Purchase and install wood ties, surface track, install 14.4 track miles of new 136lb rail for various curves, purchase and install Switch at CP 271, Drainage Improvements at various location | \$17,000,000 | | vood ties (9/20-9/21); Rail Installation (9/20-11/21); 271/ Stamford (9/20-12/21); Out of Face Surfacing (9/20-12/21) | | |
| Track and Speed Improvements (TIME) DOT03000214PE | Initiate design and select consultant. | \$4,000,000 | Units not available | Complete Des | sign in March 2023 | 3 |

Connecticut DOT capital renewal plan continued on the next page >>>

Connecticut DOT FY21-25 capital renewal plan (continued)

| Name/title (description) | BCC-Eligibility | FY21 Budget | FY22 Budget | FY23 Budget | FY24 Budget | FY25 Budget |
|---|--|---------------|---|------------------------------|--------------------|---------------|
| NHL S program/Timber Program | BCC Eligible | \$6,000,000 | \$7,500,000 | \$9,000,000 | \$9,800,000 | \$10,800,000 |
| FY21 Scope, Budget, Units, Schedule Deta | <u>ills</u> | | | | | |
| DOT03000161CN (Bridge Timber Program). | MP 33.75, MP 40.89, MP 41.28, MP 55.03 and MP 29.90, MP 29.90, MP 29.48, MP 29.68 | \$0 | Units not available | Project Complete in Closeout | | |
| DOT03000195CN (S-22). | MP 33.41, MP 59.01, MP 59.96." | \$1,000,000 | Install wood ties; Rail Installation; Switch replacement CP 272; Out of Face Surfacing | 12/31/20 com | pletion | |
| DOT03000207CN (S-23). | MP 33.75, MP 34.17, MP 33.72, MP 43.97, MP 49.66, MP 54.58, MP 56.35, MP 57.46, MP70.36" | \$4,000,000 | Units not available | Complete De | sign in March 202 | 3 |
| Positive Train Control | BCC Eligible | \$15,000,000 | \$15,000,000 | \$15,000,000 | \$15,000,000 | \$0 |
| FY21 Scope, Budget, Units, Schedule Deta | <u>iils</u> | | | | | |
| Positive Train Control DOT030000149CN | Complete installation for the New Haven mainline and put all segments into Revenue Service Demonstration | \$15,000,000 | Units not available | Put all segmen 2020. | nts in to RSD by D | ecember 31, |
| Substation Repairs/Improvements | BCC Eligible | \$6,000,000 | \$5,000,000 | \$5,000,000 | \$5,000,000 | \$5,000,000 |
| FY21 Scope, Budget, Units, Schedule Deta | <u>ills</u> | | | | | |
| DOT03010511 (Devon Transformer) | Continue procurement | \$0 | Units not available | Installation Sc | heduled to Begin | 2022 |
| DOT03010505CN (Sasco Creek Power Supply) DOT03010508CN (Oil Filled Circuit Breakers)DOT03010517CN (HMI) | Complete Procurement of Sasco Creek Transformers, begin installation | \$6,000,000 | Units not available | Start installation | on of Sasco Creek | March 2021. |
| Substation Replacements | BCC Eligible | \$2,000,000 | \$0 | \$0 | \$0 | |
| FY21 Scope, Budget, Units, Schedule Deta | <u>iils</u> | | | | | |
| DOT03010072CN (5 Substations). DOT03010153CN (6th Substation) | Complete Construction of Substation 524, demolish old substation | \$0 | Units not available | Complete Co | nstruction 9/1/202 | 11 |
| Total | | \$131,200,000 | \$163,100,000 | \$179,000,000 | \$182,300,000 | \$197,800,000 |

This page left intentionally blank

Metro-North Railroad FY21-25 capital renewal plan

| Name/title (description) | BCC- Eligibility | FY21 Scope | FY21 Units | FY21 Schedule | FY21 Budget |
|---|---------------------|---|-------------------|--|--------------|
| Comms & Signal Program | BCC Eligible | Work may include component replacement of Communications and Signal systems | Not applicable | Ongoing | \$500,000 |
| OH Bridge Rehabilitation Program: Centre Av Bridge Replacement | BCC Eligible | Advertise 3rd party contract for design effort Begin 3rd party design contract | None specified | Design anticipated for FFY21 | \$2,000,000 |
| OH Bridge Rehabilitation: Design for NH Bridge replacements | BCC Eligible | Advertise 3rd party contract for design effort Begin 3rd party design contract | None specified | Design anticipated for FFY21 | \$2,000,000 |
| Retaining Wall Reconstruction: Port Chester Retaining Wall | BCC Eligible | Continue construction efforts | None specified | This work will require a mix of off-peak, weekend, and continuous outages on one track at a time between CP 223 and CP 229 beginning in October FFY21 to the end of FFY21. This work is planned in parallel with the replacement of Willet Av and Highland Road Bridges in Port Chester, NY. Service plans for 3-track operation in this segment have been developed by MNR with input from Amtrak. No reduction in service is expected. | \$750,000 |
| Structures Program | BCC Eligible | Work may include replacing deteriorated bridge culverts, bridge timbers, installing bridge walkways and ROW fencing | Not applicable | Ongoing | \$250,000 |
| Substation 128 and 178 replacement | BCC Eligible | Complete preliminary design effort. Prepare documents for designbuild procurement. Advertise 3rd party design-build procurement." | None specified | Ongoing design work is anticipated to conclude FFY21 Q3 | \$2,000,000 |
| System-wide Support Programs | BCC Eligible | Ongoing work associated with the delivery of capital program projects at MNR. | Not applicable | Ongoing | \$450,000 |
| Track Programs | BCC Eligible | Work may include track replacement, ballast and timber work, interlocking replacement, procurement of MOW equipment | Not applicable | Ongoing | \$2,250,000 |
| UG Bridge Rehabilitation Program: Willet Av and Highland Rd Bridge Replacement | BCC Eligible | Continue construction efforts | None specified | This work will require a mix of off-peak, weekend, and continuous outages on one track at a time between CP 223 and CP 229 beginning in October FFY21 to the end of FFY21. This work is planned in parallel with the replacement of retaining walls in Port Chester, NY. Service plans for 3-track operation in this segment have been developed by MNR with input from Amtrak. No reduction in service is expected. | \$9,000,000 |
| Total | | | | | \$19,200,000 |

Note: This information is accurate as of August 1, 2020. As of August 1,2020, the MTA has not announced any changes to the 2020-2024 Capital Program due to financial impacts caused by the COVID-19 pandemic. Annual allocations for projects and programs are based on the MTA 2020-2024 Capital Program, as approved on December 31, 2019 by MTA Capital Program Review Board. Subject to change as project implementations proceed. FFY 2025 is beyond the scope of the current MTA Capital Program.

| FY22 Scope | FY22 Units | FY22 Schedule | FY22 Budget | FY23 Budget | FY24 Budget | FY25 Budget |
|--|-------------------|--|--------------|--------------|--------------|-------------|
| Work may include component replacement of Communications and Signal systems | Not applicable | Ongoing | \$500,000 | \$500,000 | \$500,000 | \$500,000 |
| Continue design efforts; complete preliminary design. Determine feasibility for 3rd party design-build contract for bridge replacement. | None specified | Design tasks anticipated for FFY22 | \$2,000,000 | \$8,000,000 | \$8,000,000 | \$1,000,000 |
| Continue design efforts; continue advancing preliminary design for OH bridge replacements | None specified | Design tasks anticipated for FFY22 | \$2,000,000 | \$2,000,000 | \$2,000,000 | \$2,000,000 |
| Continue construction efforts, complete retaining wall reconstruction | None specified | This work will require a mix of off-peak, weekend, and continuous outages on one track at a time between CP 223 and CP 229 beginning in October FFY21 to the end of FFY21. This work is planned in parallel with the replacement of Willet Av and Highland Road Bridges in Port Chester, NY. Service plans for 3-track operation in this segment have been developed by MNR with input from Amtrak. No reduction in service is expected. | \$750,000 | \$0 | \$0 | \$0 |
| Work may include replacing deteriorated bridge culverts, bridge timbers, installing bridge walkways and ROW fencing | Not applicable | Ongoing | \$250,000 | \$250,000 | \$250,000 | \$250,000 |
| Begin design-build contract for substation replacements. Activities include final design, review and construction | Not applicable | Design-Build contract anticipated to begin in FY22 Q1 and last for 3 years | \$13,000,000 | \$13,000,000 | \$12,500,000 | \$0 |
| Ongoing work associated with the delivery of capital program projects at MNR. | Not applicable | Ongoing | \$450,000 | \$450,000 | \$450,000 | \$100,000 |
| Work may include track replacement, ballast and timber work, interlocking replacement, procurement of MOW equipment | Not applicable | Ongoing | \$2,250,000 | \$2,250,000 | \$2,250,000 | \$2,250,000 |
| Continue construction efforts, complete bridge replacement | None specified | This work will require a mix of off-peak, weekend, and continuous outages on one track at a time between CP 223 and CP 229 beginning in October FFY21 to the end of FFY21. This work is planned in parallel with the replacement of retaining walls in Port Chester, NY. Service plans for 3-track operation in this segment have been developed by MNR with input from Amtrak. No reduction in service is expected. | \$9,000,000 | \$0 | \$0 | \$0 |
| | | | \$30,200,000 | \$26,450,000 | \$25,950,000 | \$6,100,000 |

Amtrak FY21-25 capital renewal plan

| Discipline and Region | FY21 | FY22 | FY23 | FY24 | FY25 |
|-------------------------|---------------|---------------|---------------|---------------|---------------|
| 3rd Party | \$232,901 | - | - | - | - |
| NEC Main Line | \$0 | - | - | - | - |
| NEC Branch Lines | \$232,901 | - | - | - | - |
| Admin | \$32,941,225 | - | - | - | - |
| NEC Main Line | \$31,982,638 | - | - | - | - |
| NEC Branch Lines | \$958,587 | - | - | - | - |
| Communication & Signals | \$91,896,359 | \$30,353,334 | \$33,032,212 | \$31,458,762 | \$30,746,422 |
| NEC Main Line | \$68,308,006 | \$23,415,034 | \$26,269,598 | \$26,782,892 | \$25,042,776 |
| NEC Branch Lines | \$23,588,353 | \$6,938,300 | \$6,762,613 | \$4,675,869 | \$5,703,646 |
| Electric Traction | \$112,519,703 | \$106,828,918 | \$129,528,331 | \$149,422,343 | \$145,639,164 |
| NEC Main Line | \$105,284,370 | \$100,433,318 | \$120,276,307 | \$136,603,662 | \$131,970,763 |
| NEC Branch Lines | \$7,235,333 | \$6,395,600 | \$9,252,024 | \$12,818,681 | \$13,668,401 |
| Safety | \$2,576,989 | - | - | - | - |
| NEC Main Line | \$2,576,989 | - | - | - | - |
| NEC Branch Lines | \$0 | - | - | - | <u>-</u> |
| Structures & Facilities | \$49,355,458 | \$65,106,282 | \$64,617,230 | \$68,600,572 | \$127,173,503 |
| NEC Main Line | \$36,716,426 | \$58,628,901 | \$55,053,394 | \$64,106,024 | \$82,955,739 |
| NEC Branch Lines | \$12,639,032 | \$6,477,381 | \$9,563,836 | \$4,494,548 | \$44,217,764 |
| Track | \$339,451,765 | \$327,711,466 | \$372,822,228 | \$425,518,323 | \$416,440,911 |
| NEC Main Line | \$305,662,306 | \$314,128,780 | \$361,410,392 | \$409,394,291 | \$389,104,110 |
| NEC Branch Lines | \$33,789,459 | \$13,582,686 | \$11,411,836 | \$16,124,032 | \$27,336,801 |
| Total | \$628,974,400 | \$530,000,000 | \$600,000,000 | \$675,000,000 | \$720,000,000 |

Amtrak's FY21 capital renewal plan details, including scope, schedule, and budget information, can be found on each Amtrak-owned segment page or on nec-commission.com/fy25-cip

FY21 Budget is provided as part of Amtrak's FY21 Capital Renewal Plan submission. The FY22-25 Budgets are adapted from Amtrak's Infrastructure Asset Line Plan. 3rd Party, Admin, and Safety investments are not described in Amtrak's Infrastructure Asset Line Plan therefore expenditures in these disciplines are to be

The NEC Main Line refers to the main alignment between Washington, DC and Boston, MA. The NEC Branch Line refers to the 3 branch alignments on the Northeast Corridor (Philadelphia, PA to Harrisburg, PA; New York, NY to Spuyten Duyvil, NY; New Haven, CT to Springfield, MA). The NEC Branch Lines investments in the FY22-25 plan may also include projects and programs on Amtrak-owned territory between Spuyten Duyvil, NY and Poughkeepsie, NY (BCC Segment 26) however this segment is not under the purview of the Northeast Corridor Commission.

This page left intentionally blank

Special Projects

Appendix Figure 7. Summary of FY21-25 special project funding requirements

The following is a summary of the FY21 budgets, FY21-25 funding available, and FY21-25 funding needed for all special projects. Explore all the special projects at **nec-commission.com/fy25-cip**

| Special Project | Coordinating Agency | FY21 Budget | FY21-25 Funding Available | FY21-25 Funding Needed | FY21-25 Total |
|--|------------------------|-----------------|------------------------------|---------------------------|------------------|
| SPECIAL PROJECTS | | \$1,081,751,019 | \$11,918,380,783 | \$16,871,729,558 | \$28,790,110,341 |
| Major Backlog | | \$285,396,995 | \$5,401,669,654 | \$14,394,902,431 | \$19,796,572,085 |
| Baltimore & Potomac Tunnel Replacement: Enabling Components | Amtrak | \$16,300,000 | \$31,375,400 | \$26,000,000 | \$57,375,400 |
| Baltimore & Potomac Tunnel Replacement: Tunnel Proper | Amtrak | \$10,700,000 | \$10,700,000 | \$466,000,000 | \$476,700,000 |
| Connecticut River Bridge Replacement | Amtrak | \$4,600,000 | \$4,600,000 | \$415,200,000 | \$419,800,000 |
| Devon Bridge Replacement | Connecticut DOT | \$500,000 | \$225,000,000 | \$0 | \$225,000,000 |
| East River Tunnel Rehabilitation: Enabling Components | Amtrak | \$2,000,000 | \$2,000,000 | \$35,000,000 | \$37,000,000 |
| East River Tunnel Rehabilitation: Tunnel Proper | Amtrak | \$6,737,000 | \$6,737,000 | \$500,000,000 | \$506,737,000 |
| Gateway: Hudson Tunnel Project | Amtrak | \$35,741,495 | \$1,949,000,000 | \$11,650,000,000 | \$13,599,000,000 |
| Gateway: Portal North Bridge | NJ TRANSIT | \$66,701,000 | \$1,803,000,000 | \$0 | \$1,803,000,000 |
| Gateway: Sawtooth Bridges Replacement Project | Amtrak | \$9,277,500 | \$9,277,500 | \$827,902,431 | \$837,179,931 |
| Pelham Bay Bridge Replacement | Amtrak | \$0 | \$0 | \$15,000,000 | \$15,000,000 |
| Saugatuck River Bridge Replacement | Connecticut DOT | \$0 | \$0 | \$350,000,000 | \$350,000,000 |
| Susquehanna River Bridge Replacement: Phase 1 | Amtrak | \$2,840,000 | \$52,840,000 | \$50,000,000 | \$102,840,000 |
| Walk Bridge Program | Connecticut DOT | \$130,000,000 | \$1,307,139,754 | \$59,800,000 | \$1,366,939,754 |
| Improvement | | \$796,354,024 | \$6,516,711,129 | \$2,476,827,127 | \$8,993,538,256 |
| 30th Street West Catenary Replacement | SEPTA | \$2,236,845 | \$71,388,589 | \$0 | \$71,388,589 |
| Ardmore Transportation Center: Phase 1 ADA Improvements | SEPTA | \$12,580,000 | \$46,791,706 | \$0 | \$46,791,706 |
| Attleboro Line Track 3 Extension: Transfer to Junction | MBTA | \$5,000,000 | \$60,177,108 | \$0 | \$60,177,108 |
| Attleboro Line Track 3 OCS Installation | MBTA | \$3,058,319 | \$3,058,319 | \$0 | \$3,058,319 |
| Back Bay Station: Platform Ventilation | МВТА | \$26,000,000 | \$26,000,000 | \$0 | \$26,000,000 |
| Baltimore Penn Station: Infrastructure Improvements | Amtrak | \$16,628,643 | \$46,579,089 | \$0 | \$46,579,089 |
| Baltimore Penn Station: Master Plan | Amtrak | \$16,865,226 | \$90,000,000 | \$20,000,000 | \$110,000,000 |
| Boston South Station: Tower 1 Interlocking | МВТА | \$11,050,000 | \$71,310,000 | \$0 | \$71,310,000 |
| Claymont Regional Transportation Center | Delaware DOT | \$32,217,097 | \$58,590,797 | \$0 | \$58,590,797 |

| Special Project | Coordinating Agency | FY21 Budget | FY21-25 Funding Available | FY21-25 Funding Needed | FY21-25 Total |
|---|------------------------|------------------|------------------------------|---------------------------|---------------|
| CTrail Hartford Line Commuter Station Improvements | Connecticut DOT | \$1,000,000 | \$229,000,000 | \$17,500,000 | \$246,500,000 |
| Delaware Third Track Program | Delaware DOT | See project page | See project page | \$0 | \$0 |
| Delco Lead | NJ TRANSIT | \$8,000,000 | \$224,849,000 | \$0 | \$224,849,000 |
| East River Tunnel: Right of Way Infrastructure Improvements | МТА | \$3,000,000 | \$3,000,000 | \$0 | \$3,000,000 |
| Edison Station Improvements | NJ TRANSIT | \$0 | \$22,200,000 | \$0 | \$22,200,000 |
| Elizabeth Station Improvements | NJ TRANSIT | \$20,000,000 | \$34,400,000 | \$36,600,000 | \$71,000,000 |
| Exton Station: Phase 2 Multimodal Improvements | SEPTA | \$0 | \$0 | \$39,500,000 | \$39,500,000 |
| Fitter Interlocking (formerly Yale Interlocking) | Amtrak | \$3,000,000 | \$3,000,000 | \$26,300,000 | \$29,300,000 |
| Frazer Rail Shop and Yard Upgrade | SEPTA | \$1,844,592 | \$62,019,535 | \$0 | \$62,019,535 |
| Gateway: Dock Bridge Rehabilitation | Amtrak | \$1,586,245 | \$31,800,000 | \$31,800,000 | \$63,600,000 |
| Gateway: Harrison Fourth Track Phase 1 | Amtrak | \$1,660,000 | \$2,211,649 | \$1,315,000 | \$3,526,649 |
| Gateway: NJ TRANSIT Storage Yard | NJ TRANSIT | \$0 | \$0 | \$150,000,000 | \$150,000,000 |
| Gateway: Penn Station Expansion | Amtrak | See project page | \$19,550,000 | See project page | \$19,550,000 |
| Hanson Interlocking | Amtrak | \$16,812,914 | \$37,677,895 | \$0 | \$37,677,895 |
| Harold Interlocking | MTA | \$100,000,000 | \$798,478,633 | See project page | \$798,478,633 |
| Harrisburg Line Interlocking Improvements: Paoli | Pennsylvania DOT | \$0 | \$0 | \$0 | \$0 |
| Harrisburg Line Interlocking Improvements: Potts | Pennsylvania DOT | \$0 | \$0 | \$4,600,000 | \$4,600,000 |
| Harrisburg Line Interlocking Improvements: Zoo | Pennsylvania DOT | \$2,000,000 | \$56,531,526 | \$7,500,000 | \$64,031,526 |
| Harrisburg Line Signal Upgrade: Zoo to Paoli | SEPTA | \$0 | \$0 | \$50,000,000 | \$50,000,000 |
| Harrisburg Line Station Improvements: Coatesville | Pennsylvania DOT | \$15,000,000 | \$55,000,000 | \$0 | \$55,000,000 |
| Harrisburg Line Station Improvements: Downingtown | Pennsylvania DOT | \$2,500,000 | \$20,436,190 | \$8,000,000 | \$28,436,190 |
| Harrisburg Line Station Improvements: Lancaster | Pennsylvania DOT | \$2,000,000 | \$2,000,000 | \$14,000,000 | \$16,000,000 |
| Harrisburg Line Station Improvements: Middletown | Pennsylvania DOT | \$10,000,000 | \$10,000,000 | \$0 | \$10,000,000 |
| Harrisburg Line Station Improvements: Parkesburg | Pennsylvania DOT | \$500,000 | \$3,500,000 | \$24,000,000 | \$27,500,000 |
| Harrisburg Line Track 2 Restoration: Paoli to Frazer | SEPTA | \$0 | \$0 | \$50,000,000 | \$50,000,000 |
| Harrisburg Line Track 2 Upgrade: Glen to Thorn (MP 25.3 to 35.0) | SEPTA | \$4,670,000 | \$16,675,000 | \$0 | \$16,675,000 |
| Hartford Line Rail Program: Phases 3B - 5 | Connecticut DOT | \$1,000,000 | \$221,500,000 | \$184,000,000 | \$405,500,000 |
| Hunter Flyover | NJ TRANSIT | See project page | \$500,000 | \$256,500,000 | \$257,000,000 |

| Special Project | Coordinating Agency | FY21 Budget | FY21-25 Funding Available | FY21-25 Funding Needed | FY21-25 Total |
|--|------------------------|------------------|------------------------------|---------------------------|-----------------|
| Jersey Avenue Station | NJ TRANSIT | \$0 | \$0 | \$75,000,000 | \$75,000,000 |
| Malvern Station: ADA Improvements | SEPTA | \$0 | \$0 | \$15,260,000 | \$15,260,000 |
| MARC Storage Improvements: Martin Airport | Maryland DOT | \$0 | \$0 | \$13,000,000 | \$13,000,000 |
| Martin State Airport Station Replacement | Maryland DOT | \$0 | \$0 | \$950,000 | \$950,000 |
| Maryland Section Reliability Improvements | Amtrak | \$640,111 | \$640,111 | \$0 | \$640,111 |
| MBTA Pawtucket Layover Facility | МВТА | \$7,000,000 | \$7,000,000 | \$20,000,000 | \$27,000,000 |
| Metuchen Station Improvements | NJ TRANSIT | \$0 | \$0 | \$63,500,000 | \$63,500,000 |
| Midline Loop | NJ TRANSIT | \$0 | \$0 | \$344,506,156 | \$344,506,156 |
| Moynihan Station: Phase 2 | Amtrak | \$50,700,000 | \$50,700,000 | \$0 | \$50,700,000 |
| New Brunswick Station Improvements | NJ TRANSIT | \$21,348,000 | \$21,348,000 | \$0 | \$21,348,000 |
| New Carrollton Station: Acela 21 | Amtrak | \$8,490,000 | \$16,200,000 | \$17,637,881 | \$33,837,881 |
| New Carrollton Station: SOGR & ADA | Amtrak | \$0 | \$0 | \$1,200,000 | \$1,200,000 |
| New Haven Line Stations Improvements: Stamford Station | Connecticut DOT | \$1,500,000 | \$105,250,000 | \$0 | \$105,250,000 |
| New Haven Line Track Speed Improvement Program | Connecticut DOT | \$2,000,000 | \$26,000,000 | \$224,000,000 | \$250,000,000 |
| New Haven Line Yard and Facility Program | Connecticut DOT | \$1,000,000 | \$477,000,000 | See project page | \$477,000,000 |
| Newark (DE) Regional Transportation Center | Delaware DOT | \$19,259,786 | \$28,709,786 | \$0 | \$28,709,786 |
| Newark Penn Station: Amtrak Projects | Amtrak | \$1,000,000 | \$1,000,000 | \$91,500,000 | \$92,500,000 |
| Newark Penn Station: NJ TRANSIT Projects | NJ TRANSIT | See project page | \$26,350,000 | See project page | \$26,350,000 |
| Next Generation High Speed Fleet Infrastructure: Ivy City/Washington Terminal Yard Facility Improvements | Amtrak | \$22,400,000 | \$22,400,000 | \$0 | \$22,400,000 |
| Next Generation High Speed Fleet Infrastructure: Ride Quality Investment | Amtrak | \$3,456,396 | \$14,720,094 | \$0 | \$14,720,094 |
| Next Generation High Speed Fleet Infrastructure: Safety Mitigation | Amtrak | \$21,464,393 | \$64,021,238 | \$0 | \$64,021,238 |
| Next Generation High Speed Fleet Infrastructure: Southampton St. Yard Facility Improvements | Amtrak | \$8,800,000 | \$8,800,000 | \$0 | \$8,800,000 |
| Next Generation High Speed Fleet Infrastructure: Sunnyside Yard Facility Improvements | Amtrak | \$41,600,000 | \$147,600,000 | \$0 | \$147,600,000 |
| NJ TRANSITGRID | NJ TRANSIT | \$76,394,000 | \$547,268,000 | \$0 | \$547,268,000 |
| North Elizabeth Station Improvements | NJ TRANSIT | \$0 | \$0 | \$717,000 | \$717,000 |
| Paoli Transportation Center: Phase 2 Station & Intermodal Improvements | SEPTA | \$0 | \$0 | \$51,200,000 | \$51,200,000 |
| Pawtucket/Central Falls Station | Rhode Island DOT | \$18,500,000 | \$34,910,000 | \$0 | \$34,910,000 |
| Penn Station Access | MTA | See project page | \$1,583,141,445 | See project page | \$1,583,141,445 |

| Special Project | Coordinating Agency | FY21 Budget | FY21-25 Funding Available | FY21-25 Funding Needed | FY21-25 Total |
|--|------------------------|------------------|------------------------------|---------------------------|---------------|
| Penn Station New York: NJ TRANSIT Projects | NJ TRANSIT | \$10,028,000 | \$10,028,000 | \$65,000,000 | \$75,028,000 |
| Penn Station New York: Reconstruction Master Plan | MTA | See project page | See project page | See project page | \$430,000,000 |
| Penn-Camden Connector | Maryland DOT | \$0 | \$0 | \$9,500,000 | \$9,500,000 |
| Philadelphia 30th Street Station District Plan Implementation | Amtrak | \$3,100,000 | \$203,035,000 | See project page | \$203,035,000 |
| Princeton Junction Station Improvements | NJ TRANSIT | \$747,000 | \$747,000 | \$0 | \$747,000 |
| Providence Station Improvements | Rhode Island DOT | \$14,000,000 | \$25,000,000 | \$0 | \$25,000,000 |
| River-to-River Rail Resiliency Projects (R4) | MTA | \$25,000,000 | \$108,100,000 | \$0 | \$108,100,000 |
| Ruggles Street Station Accessibility Improvements: Phase 1 | МВТА | \$12,500,000 | \$12,500,000 | \$0 | \$12,500,000 |
| Ruggles Street Station Accessibility Improvements: Phase 2 | МВТА | \$3,000,000 | \$3,248,754 | \$23,000,000 | \$26,248,754 |
| Shore Line East Station Improvements | Connecticut DOT | \$1,000,000 | \$32,000,000 | See project page | \$32,000,000 |
| Shore Line East Track & Catenary Improvements (FY22) | Connecticut DOT | \$10,000,000 | \$10,000,000 | See project page | \$10,000,000 |
| South Attleboro Station Accessibility Improvements | МВТА | \$45,100,000 | \$48,661,718 | \$0 | \$48,661,718 |
| Southwest Connection Improvement Project | SEPTA | \$6,270,798 | \$34,124,672 | \$0 | \$34,124,672 |
| Trenton Transit Center Improvements | NJ TRANSIT | See project page | \$0 | \$23,690,000 | \$23,690,000 |
| Veltri Interlocking | Amtrak | \$2,000,000 | \$2,000,000 | \$29,500,000 | \$31,500,000 |
| Villanova Station: Phase 2 ADA Improvements | SEPTA | \$0 | \$10,450,000 | \$0 | \$10,450,000 |
| VRE Midday Storage Facility | VRE | \$8,383,706 | \$96,780,678 | \$0 | \$96,780,678 |
| Warwick/T.F. Green Airport Station | Rhode Island DOT | \$3,000,000 | \$3,500,000 | \$180,000,000 | \$183,500,000 |
| Washington Union Station: Claytor Concourse Modernization Program | Amtrak | \$1,417,663 | \$146,299,437 | See project page | \$146,299,437 |
| Washington Union Station: Long Term Station Expansion | Amtrak | \$1,879,871 | \$115,944,915 | See project page | \$115,944,915 |
| Washington Union Station: Near Term Rail Program | Amtrak | \$1,131,377 | \$28,072,819 | See project page | \$28,072,819 |
| Washington Union Station: Subbasement Program | Amtrak | \$22,033,042 | \$114,934,426 | See project page | \$114,934,426 |

FY21-25 CIP Special project listing by coordinating agency

The following is a list of NEC special projects organized by the coordinating agency and project type (which include Major Backlog Projects and Improvement Projects), listed alphabetically and the corresponding special project page. Explore all the special projects at nec-commission.com/fy25-cip

| Amtrak | Philadelphia 30th Street Station District Plan Implementation210 |
|--|---|
| lajor Backlog Projects | Veltri Interlocking212 |
| Baltimore & Potomac Tunnel Replacement: Enabling Components160 | Washington Union Station: Claytor Concourse Modernization Program214 |
| Baltimore & Potomac Tunnel Replacement: Tunnel Proper162 Connecticut River Bridge Replacement164 | Washington Union Station: Long Term Station Expansion |
| East River Tunnel Rehabilitation: Enabling Components166 | Washington Union Station: Subbasement Program220 |
| East River Tunnel Rehabilitation: Tunnel Proper168 | |
| Gateway: Hudson Tunnel Project170 | Connecticut DOT |
| Gateway: Sawtooth Bridges Replacement Project172 | Major Backlog Projects |
| Pelham Bay Bridge Replacement174 | Devon Bridge Replacement |
| Susquehanna River Bridge Replacement: | Saugatuck River Bridge Replacement224 |
| Phase 1176 | Walk Bridge Program226 |
| nprovement Projects | Improvement Projects |
| Baltimore Penn Station: Infrastructure Improvements | CTrail Hartford Line Commuter Station Improvements |
| Baltimore Penn Station: Master Plan180 | Hartford Line Rail Program Phase 3B - 5230 |
| Fitter Interlocking (formerly Yale Interlocking) | New Haven Line Stations Improvements: Stamford Station |
| Gateway: Harrison Fourth Track Phase 1186 | New Haven Line Track Speed Improvement Program234 |
| Hanson Interlocking | New Haven Line Yard and Facility Program236 |
| Maryland Section Reliability Improvements | Shore Line East Track & Catenary Improvements (FY22)238 |
| New Carrollton Station: Acela 21194 | Shore Line East Station Improvements240 |
| New Carrollton Station: SOGR & ADA196 | r i i i i i i i i i i i i i i i i i i i |
| Newark Penn Station: Amtrak Projects198 | D.L. DOT |
| Next Generation High Speed Fleet Infrastructure: Ivy City/Washington Terminal Yard Facility Improvements | Delaware DOT Claymont Regional Transportation Center242 Delaware Third Track Program244 |
| Next Generation High Speed Fleet Infrastructure: Ride Quality Investment202 | Newark (DE) Regional Transportation Center246 |
| Next Generation High Speed Fleet Infrastructure: Safety Mitigation204 | Maryland DOT |
| Next Generation High Speed Fleet Infrastructure: Southampton St. Yard Facility Improvements206 | MARC Storage Improvements: Martin Airport248 |
| Next Generation High Speed Fleet Infrastructure: | Martin State Airport Station Replacement250 |
| Sunnyside Yard Facility Improvements | Penn-Camden Connector252 |

MBTA Pennsylvania DOT Attleboro Line Track 3 Extension: Harrisburg Line Interlocking Improvements: Paoli314 Transfer to Junction......254 Harrisburg Line Interlocking Improvements: Potts......316 Attleboro Line Track 3 OCS Installation256 Harrisburg Line Interlocking Improvements: Zoo.......318 Back Bay Station: Platform Ventilation258 Harrisburg Line Station Improvements: Coatesville320 Boston South Station: Tower 1 Interlocking260 Harrisburg Line Station Improvements: Downingtown .322 MBTA Pawtucket Layover Facility......262 Harrisburg Line Station Improvements: Lancaster.......324 Ruggles Street Station Accessibility Improvements: Harrisburg Line Station Improvements: Middletown326 Phase 1.......264 Harrisburg Line Station Improvements: Parkesburg......328 Ruggles Street Station Accessibility Improvements: Rhode Island DOT South Attleboro Station Accessibility Improvements....268 Pawtucket/Central Falls Station......330 **MTA** Warwick/T.F. Green Airport Station334 East River Tunnel: Right of Way Infrastructure Improvements270 Gateway: Penn Station Expansion......272 **SEPTA** Harold Interlocking......274 30th Street West Catenary Replacement336 Ardmore Transportation Center: Penn Station New York: Reconstruction Master Plan......278 Exton Station: Phase 2 Multimodal Improvements 330 River-to-River Rail Resiliency Projects (R4)......280 Frazer Rail Shop and Yard Upgrade332 Harrisburg Line Signal Upgrade: Zoo to Paoli......334 Harrisburg Line Track 2 Restoration: Paoli to Frazer......336 **NJ TRANSIT** Harrisburg Line Track 2 Upgrade: Major Backlog Projects Gateway: Portal North Bridge282 Malvern Station: ADA Improvements......340 Improvement Projects Paoli Transportation Center: Phase 2 Station & Intermodal Improvements......342 Edison Station Improvements286 Southwest Connection Improvement Project......344 Elizabeth Station Improvements......288 Villanova Station: Phase 2 ADA Improvements......346 Gateway: NJ TRANSIT Storage Yard......290 Hunter Flyover......292 **VRE** Jersey Avenue Station......294 VRE Midday Storage Facility......348 Metuchen Station Improvements......296 New Brunswick Station Improvements......300 Newark Penn Station: NJ TRANSIT Projects302 NJ TRANSITGRID......304 North Elizabeth Station Improvements......306 Penn Station New York: NJ TRANSIT Projects308 Princeton Junction Station Improvements310 Trenton Transit Center Improvements......312

Appendix Figure 8. Special Projects Page Key

The special projects appendix page key is intended to provide context on the special project pages in this appendix and clarity about how the various fields relate to each other. All special project information is submitted by the coordinating agency and confirmed through an iterative review process with partner agencies.

Project Name

Coordinating Agency: NEC stakeholder agency which provides capital project data for the development of this plan.

In Partnership With: NEC stakeholder agencies or other non-NEC organizations

which are contributing to or affected by this project. **Type:** (Major Backlog/Improvement) **Benefit:** (Sole/Shared)

Funding Status: (Fully funded or programmed / Partially funded or programmed / Unfunded) This field indicates if this project currently needs any additional funding or if it is sufficiently funded through the funding sources listed below.

General Project Information

Full Project Scope Complete scope for the entire project (including previously completed work and work to be completed beyond fiscal year 2025).

Project Justification Justification for the complete project scope stated above.

Total Project Cost The total project cost estimate to complete the full scope as described.

Status of Project-Based Cost Allocation (PBCA) Agreement:

Not applicable/Not yet started/In Progress/Completed

For more information on Project-Based Cost Allocation, see page TK in the main report body.

Cost Derivation Methodology: Qualitative description of how the total project cost was estimated.

Project-Based Cost Allocation (PBCA) Agreement Notes: Clarifying information to explain the current status of a project-based cost allocation agreement (if applicable).

Funding sources for entire project history All funding sources reasonably assumed to fund the full project scope at the total project cost estimate quoted above. These funding sources apply to the entire project life cycle and not only to activities occuring during FY21-25. Some funding sources for ongoing projects have been expended before FY21 and others may be expended after FY21. Some projects list funding sources which have been applied for but not yet confirmed. These will be designated in the clarifying information column below.

Funding Source Amount Clarifying information

In most cases, assume a funding source is confirmed unless specified differently here.

| Project Schedule | | | | | | | | |
|------------------|---------------|----------|------|------|------|------|------|-------|
| Phase | Cost Estimate | Schedule | FY21 | FY22 | FY23 | FY24 | FY25 | Notes |

This section contains the most recent project schedule estimate to complete the full project scope as stated above, outlining all phases of the project including those already completed and those occurring after fiscal year 2025. Cost estimates for each phase are provided when available.

Project Name

Coordinating Agency: NEC stakeholder agency which provides capital project data for the development of this plan.

In Partnership With: NEC stakeholder agencies or other non-NEC organizations which are contributing to or affected by this project.

Type: (Major Backlog/Improvement) Benefit: (Sole/Shared)

Funding Status: This field indicates if this project currently needs any additional funding or if it is sufficiently funded through the funding sources listed below. (Fully funded or programmed / Partially funded or programmed / Unfunded)

One Year Information

The One Year Information contains detailed budget, scope, and milestones for fiscal year 2021 and serves as the baseline for assessing agencies' delivery of the one year plan in the Quarterly Capital Program Delivery Reports.

FY21 Budget: Planned fiscal year 2021 expenditure

FY21 Scope: Planned fiscal year 2021 scope associated with the fiscal year's planned expenditure

FY21 Milestones:

Schedule of milestones to be completed in fiscal year

Not all projects will have work to be completed in fiscal year 2021 either because the project is slated to begin after fiscal year 2021 or funding is not available to complete work in fiscal year 2021.

Notes: Clarifying information regarding the planned budget, scope, and schedule for planned activities in fiscal year 2021.

Five Year Information

Five Year Information describes capital investments to be made in FY21-25 based on available funding and capital investments that could occur in FY21-25 with additional funding given available resources.

FY21-25 Funding Available:

The total amount of funding expected to be available for spending between fiscal years 2021 to 2025. This amount includes any confirmed or programmed funding sources that agencies can reasonably assume will be received.

At this funding level, the following phases could be initiated or completed in FY21-25:

The scope of work that could be completed with available resources up to the total funding available during this period, listed above. This field only applies to projects which have funding available in fiscal years 2021 to 2025.

FY21-25 Additional Funding Needed:

The amount of additional funding needed to advance work on the project during fiscal years 2021 to 2025 given known resource constraints.

With additional funding, the following phases could be initiated or completed in FY21-25 (given resource/ workforce constraints and track outages):

The scope of work that could be completed during fiscal years 2021 to 2025 if the additional funding (indicated above) was secured. This field only applies to projects for which additional funding is needed during FY21-25.

Notes: Clarifying information regarding the planned budget and scope for planned activities in fiscal years 2021 to 2025.

Baltimore & Potomac Tunnel Replacement: Enabling Components

Coordinating Agency: Amtrak
In Partnership With: Maryland DOT

Type: Major Backlog Benefit: Shared

Funding Status: Partially funded

General Project Information

Full Project Scope

The B&P Tunnel Replacement Project is located across three miles of the NEC in West Baltimore and consists of two major elements: the Tunnel Proper and Necessary Enabling Components. Necessary Enabling Components are numerous discrete components that can be individually managed and completed prior to and in anticipation of constructing the tunnel proper. These components are identified through an array of criteria including: third party infrastructure ownership/ responsibility/ coordination; stakeholder impacts; obligations associated with the Programmatic Agreement and Record of Decision; independent utility; contract size; long lead procurements; resource requirements; and specialty contractors. The list may be further modified as design development continues. Individual components may be combined in contract packages as appropriate to ensure cost and schedule efficiency. The components include, but are not necessarily limited to: Winans Interlocking Expansion and Track A Improvements from Winans (MP 103.4) to Bridge (MP 98.2) Interlockings to replace timber ties with concrete ties, Electric Traction Substation 20 Relocation and Modernization, Franklintown and Warwick Bridge Replacements, Gwynns Interlocking Installation, Utility Relocations, Reprofiling Franklin Mulberry Streets, Lafayette Avenue Bridge Modification, Edmondson Avenue Bridge Reconstruction, Property and Easement Acquisition, Building Demolition, CSX Bridge Pier Relocation, and BGE Jones Falls Transmission Tunnel Removal.

Project Justification

By utilizing discrete components, the Project does not need to be funded all at once from a single source, but rather can be funded through numerous smaller investments that are more compatible with existing funding streams. Also, a project the size of the B&P Tunnel Replacement, located in a dense urban environment must coordinate with numerous infrastructure owners and stakeholders. Discrete components allow the Project to focus attention to individual stakeholder's requirements wherever the Project intersects with a third party. By coordinating, but not combining, the discrete components, large dollar contracts are not exposed to the multitude of competing stakeholders' interests, which reduce Project risks and allow the Project to proceed on a more predictable Delivery Schedule.

Total Project Cost

\$395,000,000

Status of PBCA Agreement: Not started

Cost Derivation Methodology: Construction Cost Estimate (dated March 2017) was based upon Preliminary Engineering (nominally 30% design) using 2017 dollars. The estimate Work Breakdown Structure (WBS) has been prepared to conform to the Federal Transit Administration (FTA) Standard Cost Categories (SCC) for Capital Projects. The Cost Estimate is a Class 3 Estimate as defined by the Association for the Advancement of Cost Engineering (AACE International) Cost Estimate Classification System. Escalation is included in the estimate at a rate of three percent (3%) per annum to the midpoint of construction, which was assumed to be July 2024.

PBCA Notes: Not applicable

Funding sources for entire project history ARRA/HSIPR \$4,350,000

Federal State Partnership for SOGR \$8,000,000 FY19 Award for Track A Upgrade from Winans to Bridge

Improvement

Maryland DOT \$1,500,000 Match for FY19 SOGR Award

Amtrak FY19 & prior GCAP \$6,725,000

Amtrak FY20 GCAP \$1,500,000 Reduced due to COVID-19

Amtrak FY21 GCAP \$16,300,000 Proposed

Other Amtrak Sources \$6,500,000 Match for FY19 SOGR Award

| Project Schedule | | | | | | | | |
|-------------------------------|---------------|---------------------|------|------|------|------|------|---|
| Phase | Cost Estimate | Schedule | FY21 | FY22 | FY23 | FY24 | FY25 | Notes |
| Feasibility/Conceptual Design | | Oct 2011 - Dec 2015 | | | | | | Project initiation through 10% submittal to FRA |
| PE/NEPA | | Apr 2014 - Sep 2019 | | | | | | NEPA Contract NTP 4/8/2014; ROD Issued March 2017; extended PE followed |
| Final Design | \$32,000,000 | Oct 2019 - Sep 2025 | | | | | | |
| Construction | \$363,000,000 | Mar 2022 - Sep 2027 | | | | | | |

Baltimore & Potomac Tunnel Replacement: Enabling Components

Coordinating Agency: Amtrak In Partnership With: Maryland DOT

Type: Major Backlog Benefit: Shared

Funding Status: Partially funded

One Year Information

FY21 Budget: \$16,300,000

FY21 Scope: Continue development of a Project Plan identifying major elements, cash flow, and required resources. Prepare design of Track A upgrade from Winans to Bridge. Prepare 60% submittals for replacing Warwick Avenue and Franklintown Road undergrade bridges. Initiate design on Edmondson Avenue and Lafayette Avenue Bridges and Sub 20. Continuing to prepare documents and exhibits to meet commitments in the Project's Section 106 Programmatic Agreement (PA) and Record of Decision (ROD); Coordinate with CSX regarding the reconstruction of the CSX Bridge over the proposed Alignment. Coordinate with local utilities regarding utility relocations. Initiate Rightof-Way / Property acquisition.

FY21 Milestones:

- Issue Contract Mod to proceed into Final Design (Oct 2020)
- Track A Final Design (Sep 2021)
- Franklintown Road and Warwick Avenue Bridge Replacement 60% Design (Sep 2021)

Notes: Track A Upgrade Winans to Bridge is a discrete component with independent utility prior to the construction of the B&P Tunnel and will mitigate the operational impact of constructing other components of the B&P Tunnel Replacement Project. A portion of the \$6M FY21 Budget will be applied to the estimated \$924,600 necessary to complete the design of the Track A Upgrade.

Five Year Information

FY21-25 Funding Available: \$31,375,400

At this funding level, the following phases could be initiated or completed in FY21-25: Track A Upgrade Winans to Bridge received an \$8M Federal-State SOGR Grant, with MTA-MARC contributing \$1.5M, and Amtrak contributing the balance of \$6.5M. The \$15,075,400 shown above and the \$924,600 from FY21 is dedicated to the estimated \$16M Track A Upgrade and cannot be used towards other enabling component. Other than the Track A Upgrade Winans to Bridge, the FY22-25 monies have not been committed, however, on November 13, 2019, Amtrak Board of Director's approved a resolution to fund the next 29 months of design at an approximate cost of \$49.3M, including Project Management Support. This work is currently on hold due to COVID-19; but, once restarted, we anticipate support of property acquisitions and initiation of acquired building demolition and historic element storage; progressing design to 60% completion for bridge modifications, for the City's Edmondson Avenue and Lafayette Avenue Bridge, MARC's West Baltimore Station, and associated major city utility relocation; address design review comments; continued support of the development of the strategy for program delivery; and, engineering support necessary for compliance with commitments identified in the Section 106 Historical Preservation Programmatic Agreement.

FY21-25 Additional Funding Needed: \$26,000,000

With additional funding, the following phases could be initiated or completed in FY21-25 (given resource/ workforce constraints and track outages): Complete final design of enabling projects.

Notes: Due to the discrete components, the design phase and the construction phase of different components will overlap. There is not a singular sequential phase of 60%, 90%, Final Design, then construction package.

Baltimore & Potomac Tunnel Replacement: Tunnel Proper

Coordinating Agency: Amtrak In Partnership With: Maryland DOT

Type: Major Backlog Benefit: Shared

Funding Status: Partially funded

General Project Information

Full Project Scope

The B&P Tunnel Replacement Project is located across three miles of the NEC in West Baltimore and consists of two major elements: the Tunnel Proper and Necessary Enabling Components. The Tunnel Proper will replace the functionally obsolete, low speed, two-track, mile and a half long B&P Tunnel with a modern four-track, two-mile long tunnel. The new tunnel will reduce trip-time by permitting speeds up to 100 mph, minimize operational conflicts among high-speed, intercity, and commuter passengers, and increase throughput capacity. The new tunnel will be constructed as four single track bores to provide an inherent resiliency and will provide robust Fire & Life Safety measures that meet contemporary standards. The increased throughput will allow for greater frequency as envisioned by NEC FUTURE to accommodate growing demand across all types of service. Although not a clearance project, infrastructure constructed as part of this project will not preclude the future passage of AAR Plate H (double stack equipment) if such clearances are provided on connecting segments.

Project Justification

The aging B&P Tunnel (opened 1873) is nearing the end of its useful life and is in need of constant monitoring and maintenance at high cost. With both tracks in the same structural envelope, it is a single point of failure for the NEC and it cannot be cost effectively rehabilitated while continuing operations. Even if rehabilitated, the tunnel cannot provide for redundancy during service disruptions and would remain as a key chokepoint, forcing trains to reduce speeds to 30 mph due to its tight curvature. The improvements defined by the FRA issued Record of Decision (d. March 24, 2017) are required in order to maintain operations through Baltimore and additional tracks are needed to meet future demand.

Total Project \$4,200,000,000 Cost

Status of PBCA Agreement: Not started

Cost Derivation Methodology: Construction Cost Estimate (dated March 2017) was based upon Preliminary Engineering (nominally 30% design) using 2017 dollars. The estimate Work Breakdown Structure (WBS) has been prepared to conform to the Federal Transit Administration (FTA) Standard Cost Categories (SCC) for Capital Projects. The Cost Estimate is a Class 3 Estimate as defined by the Association for the Advancement of Cost Engineering (AACE International) Cost Estimate Classification System. Escalation is included in the estimate at a rate of three percent (3%) per annum to the midpoint of construction, which was assumed to be July 2024.

PBCA Notes: Not applicable

Funding sources for entire project history

ARRA/HSIPR \$39,150,000

SAFETEA-LU Inspection of existing tunnel \$1,182,389

Amtrak FY19 & prior GCAP \$26,675,000

\$1,500,000 Reduced due to COVID-19 Amtrak FY20 GCAP

Amtrak FY21 GCAP \$10,700,000 Proposed

Project Schedule Cost Estimate Schedule FY21 FY22 FY23 FY24 FY25 Notes Feasibility/Conceptual Design Oct 2011 - Dec 2015 Project initiation through 10% submittal to FRA PE/NEPA NEPA Contract \$42,913,679 Apr 2014 - Sep 2019 NTP 4/8/2014: **ROD** Issued March 2017; extended PE followed Final Design \$130,000,000 Oct 2019 - Sep 2024 \$4,070,000,000 Construction Oct 2022 - Sep 2032

Baltimore & Potomac Tunnel Replacement: Tunnel Proper

Coordinating Agency: Amtrak In Partnership With: Maryland DOT

Type: Major Backlog Benefit: Shared

Funding Status: Partially funded

One Year Information

FY21 Budget: \$10,700,000

FY21 Scope: Advance design of the tunnel proper and balance of project not contained within enabling projects towards 60% level and continuing geotechnical exploration program. Continue development of a Project Plan identifying major elements, cash flow, and required resources. Initiate Right-of-Way / Property acquisition.

FY21 Milestones:

Issue Contract Mod to proceed into Final Design (Oct

Five Year Information

FY21-25 Funding Available: \$10,700,000

At this funding level, the following phases could be initiated or completed in FY21-25: FY22-25 monies have not been committed, however, on November 13, 2019, Amtrak Board of Director's approved a resolution to fund the next 29 months of design at an approximate cost of \$49.3M, including Project Management Support, which will begin final design. However, this work is currently on hold due to COVID-19; but, once restarted, we anticipate progressing design to 60% completion for the major civil works (open cuts, tunnels and shafts) continued geotechnical exploration; address design review comments; continued support of the development of the strategy for program delivery, and support of property acquisitions.

FY21-25 Additional Funding Needed: \$466,000,000

With additional funding, the following phases could be initiated or completed in FY21-25 (given resource/ workforce constraints and track outages): Right-of-Way Acquisition, complete heavy civil design packages, prepare bid packages (see note below relative to railroad system design), begin construction of the Tunnel (i.e. the hole through the hill).

Notes: The B&P Tunnel Replacement Project's National Environmental Policy Act (NEPA) process was supported by Preliminary Engineering (PE), a design representing approximately 30% of Final Design; however, PE did not attempt to segment the work into discrete packages. The NEC Commission Capital Investment Plan divides the entire Project into two subsets: enabling components and the tunnel proper, with the major heavy construction and systems installations being part of the tunnel proper and enabling components being necessary preparatory work needed to ensure continuous seamless NEC service throughout construction. Each package will be developed on a just-in-time basis, to maintain the continuous progress of the B&P Tunnel Replacement Project without requiring any package to wait for others to be completed before it can proceed. Although some design will lead construction, a significant portion of design will run concurrently with construction due to the nature of the delivery methodology. Some contract packages use construction commodities that do not significantly change over time. Other contract packages require non-commodities that are manufactured products and are subject to elimination from the market place. To ensure that the design does not become obsolete while waiting to be constructed, the design effort for those contract packages that include non-commodity components will be carefully scheduled to be completed as late as possible (akin to just in time delivery) so that the specified products are current and available. Nevertheless, all design will be comprehensively and holistically developed to appropriate level of completion to coordinate across all disciplines, refine construction cost estimates and schedules, and identify needed Amtrak Force Account resources. This project delivery strategy results in the design effort continuing through most of the duration of construction.

Notes: Due to magnitude of design effort, will not reach 60% design completion in FY21.

Connecticut River Bridge Replacement

Coordinating Agency: Amtrak

In Partnership With: Connecticut DOT

Type: Major Backlog Benefit: Shared

Funding Status: Partially funded

General Project Information

Full Project Scope

This project would replace the Connecticut River Bridge between Old Saybrook and Old Lyme, CT that carries Amtrak and Shore Line East trains. Completed in 1907, it is the oldest movable bridge between New Haven, CT and Boston, MA. The bridge has a movable span that is raised up to allow boats to pass. By law, the bridge must remain open from May through September for recreational boats to pass and closes only when trains approach. Plans would replace the Connecticut River Bridge with a new design along a new alignment parallel to and south of the existing bridge that improves reliability and offers higher speeds for Amtrak and Shore Line East trains. FRA completed NEPA and issued a Finding of No Significant Impact (FONSI) for this project in January 2017. Final design is underway, but no funding is available for construction. There are multiple preparatory activities that, due to this project's size, can be initiated as standalone enabling projects, such as: submarine cable relocation and construction of retaining walls and new alignment embankment.

Project Justification

A century of operation in a marine environment, coupled with the age of the structure, has taken its toll and speeds are restricted to 45 mph. Many key elements of the bridge have reached the end of their design life and require extensive maintenance to remain in operable condition. The frequent opening and closing of the bridge - over 3,000 times per year - puts high demands on its aging components, increasing maintenance costs for Amtrak and reducing reliability for both railway and marine traffic.

Total Project \$432,470,000 Cost

Status of PBCA Agreement: Not started

Cost Derivation Methodology: This estimate is based on 60% design.

PBCA Notes: Not available

Funding sources for entire project history

Amtrak FY19 & prior GCAP \$7,250,000

| Project Schedule | | | | | | | | |
|-------------------------------|---------------|---------------------|------|------|------|------|------|--|
| Phase | Cost Estimate | Schedule | FY21 | FY22 | FY23 | FY24 | FY25 | Notes |
| Feasibility/Conceptual Design | \$1,800,000 | Jan 2018 - Jan 2019 | | | | | | |
| Final Design | \$8,900,000 | Jan 2019 - Dec 2021 | | | | | | |
| Construction | \$432,470,000 | Jan 2024 - Jan 2030 | | | | | | Enabling components may begin in FY22 if funding became available. |

Connecticut River Bridge Replacement

Coordinating Agency: Amtrak
In Partnership With: Connecticut DOT

Type: Major Backlog Benefit: Shared

Funding Status: Partially funded

One Year Information

FY21 Budget: \$4,600,000

FY21 Scope: Complete final design and environmental

permitting

FY21 Milestones:

• Final Design (Sep 2021)

Five Year Information

FY21-25 Funding Available: \$4,600,000

 At this funding level, the following phases could be initiated or completed in FY21-25:
 With the current funding available in FY21, Final design will be completed, along with all applicable environmental and historical permitting.

FY21-25 Additional Funding Needed: \$415,200,000

• With additional funding, the following phases could be initiated or completed in FY21-25 (given resource/ workforce constraints and track outages): If project construction was fully funded starting in FY22, Amtrak could procure a contractor immediately after final design completion and permitting, mobilize construction, and begin the 50 month schedule of construction, which would include placing fill and retaining structures of the new alignment, installing new piers in the river, fabricating and floating in of structural members, etc., in the FY22-25 window. Final completion, cutover, and demolition would not be until FY26.

East River Tunnel Rehabilitation: Enabling Components

Coordinating Agency: Amtrak

In Partnership With: MTA, NJ TRANSIT

Type: Major Backlog Benefit: Shared

Funding Status: Unfunded

General Project Information

Full Project Scope

The principal project that these projects enable and support is the Rehabilitation of the East River Tunnel (ERT) Line 1 and Line 2 which connect Penn Station to Sunnyside Yard in Long Island City, Queens, NY. Detailed information on that project, which may require extended outages of both tubes in series, can be found in that project's description. Discussions are underway among the railroads to determine how and whether the outages can be minimized or avoided. The reason for the ERT Enabling project listing is to both improve resiliency to the system in preparation for the added stress of 3-tube operations as well as augment the system to mitigate the transportation impacts from 3-tube operations.

Multiple enabling components have been identified, of which two are submitted for the FY20 Fed-State partnership SOGR grant applications including: (1) Traction Power Sub-3 Cable Relocation; and (2) Sunnyside Yard Connection Sub 4-Line 2.

- 1. <u>Traction Power:</u> This enabling component project will replace an aging and vulnerable section of traction power cable that currently lies in Line 2 of the ERT and install new cable in Line 1 (where the majority of the existing cable already resides). The work will be completed in two phases. The first phase involves inspecting, cleaning, proving and installing pull lines in the existing benchwall duct banks in Line 1 so as to both identify and prepare viable route options for the new section of cable to be installed. The second phase will install the new cable section in Line 1 and run the appropriate tests to bring the cable online.
- 2. Sunnyside Yard Connection Sub4-Line2: This enabling component will implement a connection to efficiently route trains from Sunnyside Yard into Penn Station. The project includes Signal System design and installations including track, switches, and catenary in the vicinity of F-Interlocking in Sunnyside Yard, Queens, NY. Benefits to Amtrak includes a high-speed bi-directional connection between Sunnyside Yard and East River Tunnel Line 2 which increases efficiency, redundancy and overall train capacity between the two facilities. This efficiency is especially critical during the ERT Line 1 tunnel outage during the rehabilitation of the Tunnel where this connection is most critical to maintaining operations.

Other components under scoping and design development include:

- <u>Sub 3 to Line 4 upgrades:</u> The Sub 3 Line 4 connection and crossover 723 will become very important for yard operations when ERT Line 2 is taken out-of-service. All west bound departures from Sunnyside Yard will be funneled through Switch 715; making this a critical piece of infrastructure and a possible single point of failure. Tasks to be completed under this effort include upgrade to 30 mph the Sub 3 Line 4 Connection from turnout 715 east to Lead 1, Lead 2, and Lead 3 and upgrade crossover 723 and crossover 79.
- Sub 1 and Sub 2 upgrades: Sub 1 and Sub 2 will accommodate the continued operation while ERT Line 1 is out of service. Sub 1 and Sub 2 will also allow trains to stack coming out of Sunnyside Yard and proceed through ERT Line 2 when the tunnel direction is set westward. To insure operational reliability, the required upgrades for Sub 1 and Sub 2 should include: 1) the Tune-up Sub 1 and Sub 2 connections eastward from SW 719 to Yard Leads 1, 2, and 3 for 30 mph operation and 2) upgrade seven turnouts: 65, 66, 69, 717, 719, 721, and 753; and one crossover: 67.
- Redundant Fiber Installation in ERT-3: to install a new redundant fiber optic cable backbone in ERT-3 to main backup for Amtrak telephone, security, SCADA, IT Network and C&S Signal systems communications. New fiber would be installed from the Penn Station Retail Room to the Sunnyside Yard Communication Hut at the Eastern portal.
- Reverse Signaling of SSYD Loop Track: this will partially mitigate the impacts of the tunnels being taken out of service. When ERT Line 2 is out of service, reverse signaling will allow trains to depart Sunnyside Yard westbound via R interlocking and ERT Line 1 and ERT Line 3 (i.e. backwards). Note: Unless turning Amtrak trains are run around the loop, the leading piece of equipment will become the trailing piece westbound. Entering Sunnyside Yard "backwards" will work with Push-Pull Equipment. When ERT Line 1 is out of service, reverse signaling the loop tracks will facilitate the reverse move needed for equipment to enter the S&I after entering Sunnyside Yard from ERT Line 2. Loop A, Loop 1, and Loop 2 will be upgraded to wayside signaling in both directions (Rule 261) from "R" Interlocking to "F" Interlocking.
- Hardening / Tune-Up of Lines 1, 3 and 4: During the ERT Rehab of Line 2, each of the three remaining tunnels will be in service. Prior to beginning of ERT rehab project Line 2,each of the remaining tunnels should receive assessment and tune-up of all systems associated with using that route in order to minimize the risk of one of the three in-service tunnel routes from unexpectedly failing and temporarily disrupting rail traffic. Possible work packages could include: feeder cable replacement, signal case replacement, switch/switch machine tune-up, drainage / sump/pump, and any associated points of failure in the powering of these systems, near term benchwall stabilization and spall/leak mitigation.

Project Justification

The East River Tunnel tubes are in desperate need of rehabilitation and improvement, due to continually worsening conditions of the tunnel given both their age and damage related to Superstorm Sandy, to ensure continuation of operations for LIRR, NJ TRANSIT, and Amtrak. This project would both enable maximum redundancy and operational continuity by mitigating the transportation impacts from the extended outages required to completely rehabilitate East River Tunnel tubes 1 and 2 which connect Penn Station, NY to Queens, NY.

Total Project Cost

\$37,000,000

Status of PBCA Agreement: In progress

Cost Derivation Methodology: • Traction Power S-3 Cable Relocation: \$6,000,000, (based on 90% design) • Sunnyside Yard Connection Sub4-Line 2: \$15,000,000 (based on 30% design) • Sunnyside Yard Connection SUB3-Line 4: \$13,000,000(ROM) • Sunnyside Yard Connection Loop Reversal Signaling: \$2,000,000 (ROM) . Estimates include design budget. Cost estimates for the remaining enabling projects will be developed.

PBCA Notes: Amtrak Business Development discussions with sister railroads have initiated.

Funding sources for entire project history

Not available

East River Tunnel Rehabilitation: Enabling Components

Coordinating Agency: Amtrak

In Partnership With: MTA, NJ TRANSIT

Type: Major Backlog Benefit: Shared

Funding Status: Unfunded

| Project Schedule | | | | | | | | |
|---|---------------|---------------------|------|------|------|------|------|-------|
| Phase | Cost Estimate | Schedule | FY21 | FY22 | FY23 | FY24 | FY25 | Notes |
| Construction- Traction Power S-3 cable Relocation | \$6,000,000 | Oct 2020 - Dec 2022 | | | | | | |
| Final Design | \$3,000,000 | Jun 2020 - Dec 2023 | | | | | | |
| Construction - Sub4-Line 2 | \$14,000,000 | Oct 2023 - Oct 2024 | | | | | | |
| Construction - Sub3-Line 4 | \$12,000,000 | Oct 2022 - Oct 2024 | | | | | | |
| Construction - Loop Reversal Signaling | \$2,000,000 | Oct 2022 - Oct 2024 | | | | | | |

One Year Information

FY21 Budget: \$2,000,000

FY21 Scope: Advance the design of the Sunnyside Yard Connections enabling projects : Sub 3-Line 4, Sub 4 -Line 2 and Reverse Signaling of Loop Tracks. Procure and advance construction of S3 relocation- Phase A.

FY21 Milestones:

- S3 Relocation Phase A Construction 90% (Sep 2021)
- Reverse Signaling 90% Design (Sep 2021)
- Sub 3 to Line 4 Upgrade 90% Design (Sep 2021)
- Sub 4 to Line 2 Upgrade 30% Design (Sep 2021)

Five Year Information

FY21-25 Funding Available: \$2,000,000

At this funding level, the following phases could be initiated or completed in FY21-25: Complete the design of all enabling projects. Complete the construction of all enabling projects.

FY21-25 Additional Funding Needed: \$35,000,000

With additional funding, the following phases could be initiated or completed in FY21-25 (given resource/ workforce constraints and track outages): Preliminary and Final Design for all approved enabling projects; construction of the enabling works that have estimates assigned herein.

Notes: Enabling projects Relocation FY21 productivity will be heavily contingent upon COVID available budgeting and procurement timelines.

East River Tunnel Rehabilitation: Tunnel Proper

Coordinating Agency: Amtrak

In Partnership With: MTA, NJ TRANSIT

Type: Major Backlog Benefit: Shared

Funding Status: Partially funded

General Project Information

Full Project Scope

This project would rehabilitate East River Tunnel tubes 1 and 2 which connect Penn Station, NY to Queens, NY. Each tunnel is approximately 13,000 feet in length. As currently designed, both tunnel tubes would be demolished down to the concrete liner and entirely rebuilt with new bench walls, track, communication systems, and electrical and signaling systems. In parallel to this effort, multi-railroad conversations are ongoing to determine if and how the outages can be minimized or avoided by investigating alternative implementation approaches. Rehabilitation of the track and drainage systems will require removal and replacement of track and ballast, new welded rail installations on a modern direct fixation track system, new impedance bond installations, new I joint installations, drainage system cleaning, and the removal and replacement of the third rail for the entire length of each tube. The tunnel renovations will also be designed to improve the safety and security (to the greatest extent practicable) in the tunnels.

Available funding from FRA Superstorm Sandy recovery grants has been utilized, but a significant funding gap remains. This project would implement High Density Signaling to the extent recommended by a joint Amtrak/LIRR "East River Tunnel High Density Signaling" study. To support ERT Rehabilitation project and facilitate the ability to take each line out of service during construction, several enabling projects have been identified to prepare for the tunnel outages by either moving/installing utilities to provide the required redundancy / tunnel isolation or increasing reliability and throughput on other aspects of the system to mitigate train cancellations. For planning and reporting purposes, Amtrak now considers the ERT Enabling Projects a standalone project.

Project Justification

The East River Tunnel tubes are in desperate need of rehabilitation and improvement, due to continually worsening conditions of the tunnel structure given both its age and damage related to Superstorm Sandy, to ensure continuation of operations for LIRR, NJ TRANSIT, and Amtrak.

Total Project Cost

\$1,153,600,000

Status of PBCA Agreement: In progress

Cost Derivation Methodology: The most recent estimates utilize the 60% Rehabilitation Design Cost and Schedule estimates and assume s 2023 major construction initiation. Escalation of 3.5% per annum has been utilized and most modifiers have been aligned with the Gateway Program to ensure regional parity between the geographically and technically similar projects. This most recent estimate utilizes a reduced schedule duration as a result of improved design clarity and assumes a 1-year hiatus between the major tunnel outages to allow for system SOGR to catch up. This estimate does not yet include "outside of portal" system augmentation that will be required to fully refresh the system. This design scope will be added in FY21 and construction estimates will inform future updates to this plan and budget.

PBCA Notes: Amtrak Business Development discussions with sister railroads have initiated.

Funding sources for entire project history Other Federal Discretionary \$3,600,000 Superstorm Sandy FRA Relief Funds and Insurance Claims

Amtrak Annual Federal Grant \$23,600,000 Includes FY21 Request

Project Schedule **Cost Estimate** Schedule FY21 FY22 FY23 FY24 FY25 Notes Apr 2015 - Dec 2016 Feasibility/Conceptual Design \$3,600,000 Budget included in Final PE/NEPA Oct 2017 - Mar 2021 Design Final Design \$30,000,000 Oct 2018 - Sep 2021 Includes upcoming scope expansion for outside-of-portal systems design Construction (Lines 2, 1) \$1,070,000,000 Oct 2023 - Dec 2027 Year of Expenditure escalated value assuming a 2023 start. Oct 2024 - Sep 2028 Outside-of-portal design Construction - Expanded Scope TBD \$50,000,000 scope to be added in FY21, construction estimate not yet available. \$50M included as a placeholder.

East River Tunnel Rehabilitation: Tunnel Proper

Coordinating Agency: Amtrak

In Partnership With: MTA, NJ TRANSIT

Type: Major Backlog Benefit: Shared

Funding Status: Partially funded

One Year Information

FY21 Budget: \$6,737,000

FY21 Scope: Advance the design of the tunnel rehab from nominally 60% to nominally 90% level and beyond toward 100% Design; advance to 60% design to necessary work outside of the tunnel proper.

FY21 Milestones:

- 90% Design Completion (Base Scope) (Mar 2021)
- NEPA Class of Action and CE/EA (Mar 2021)
- 100% Design Completion (Base Scope) (Sep 2021)
- 60% Design (Expanded Scope) (Sep 2021)

Five Year Information

FY21-25 Funding Available: \$6,737,000

At this funding level, the following phases could be initiated or completed in FY21-25: Design completion of base scope in FY21. Progress design of enabling projects in FY21.

FY21-25 Additional Funding Needed: \$500,000,000

With additional funding, the following phases could be initiated or completed in FY21-25 (given resource/ workforce constraints and track outages): Final Design completion in FY22. Enabling project design and construction completion within the first quarter of FY25. Roughly 50% ERT Rehab construction by end FY25.

Notes: COVID impacts and Amtrak workforce reductions have already induced some delays and are expected to be a productivity risk factor in FY21.

Notes: The FY21-25 Funding Needed figure assumes minimal design continuation funding from Amtrak GCAP. Estimated FY spend due to expanded scope and revised construction initiation date: FY2022: \$3M, FY2023: \$1M, FY2024: \$200M, FY2025: \$300M

Gateway: Hudson Tunnel Project

Coordinating Agency: Amtrak
In Partnership With: NJ TRANSIT, Port Authority of NY & NJ,

Gateway Program Development Corporation Type: Major Backlog **Benefit: Shared**

Funding Status: Partially funded

General Project Information

Full Project Scope

This project will construct a new two-track rail tunnel beneath the Hudson River, rehabilitate and modernize the existing twotrack North River Tunnel, and construct the third and final rail right-of-way preservation section beneath the second phase of the Hudson Yards development project on the west side of Manhattan. When complete, the project will increase reliability and operational flexibility for Amtrak and NJ TRANSIT services on the NEC. The project was accepted by the FTA into the Engineering Phase of its Capital Investment Grant - Core Capacity grant program in June 2020.

Proiect Justification

Service reliability in the North River Tunnel has been compromised because of the damage to tunnel components caused by Superstorm Sandy, which inundated both tubes with seawater in October 2012. Chlorides from the seawater remain in the tunnel's concrete liner and bench walls, causing ongoing damage to the bench walls, embedded steel, track, and signaling and electrical components, requiring an extended outage of the tunnel in order to completely replace damaged systems and rehabilitate the tunnel. These improvements must be achieved while maintaining uninterrupted commuter and intercity rail service. Existing service can only be maintained by the construction of a new, two-track tunnel connecting to the existing Penn Station that would carry existing rail traffic during the rehabilitation of the North River Tunnel. Taking one track out of service at a time without the new tunnel would reduce total capacity for Amtrak and NJ TRANSIT by as much as 75%, impacting roughly 200,000 passenger trips on 450 trains each weekday.

Total Project Cost

\$13,598,000,000

Status of PBCA Agreement: In progress

Cost Derivation Methodology: The cost estimate is based on the 30% design of the new Hudson River Tunnel, 10% design of that rehabilitation of the North River Tunnel, and the 100% design of Section 3 of the Hudson Yards Concrete Casing. The \$13.6B cost estimate includes financing costs during the grant disbursement period; namely those associated with the proposed borrowing through federal financing programs. Financing costs have not been finalized and remain subject to negotiation between USDOT and the Gateway Program partners (Amtrak, Gateway Program Development Corporation, Port Authority of New York & New Jersey, and NJ TRANSIT). Funding sources cover entire project cost; may slightly differ due to rounding.

PBCA Notes: The FY 2021 Financial Plan provides the most recent contribution amount from each partner.

Funding sources for entire project history

| FTA CIG New Starts Grant | \$5,510,000,000 | Requested per 08-28-2020 Financial Plan |
|---------------------------|-----------------|---|
| Port Authority of NY & NJ | \$227,000,000 | Per 08-28-2020 Financial Plan |
| New York | \$154,000,000 | Per 08-28-2020 Financial Plan |
| New Jersey | \$281,000,000 | Per 08-28-2020 Financial Plan |
| Local funding | \$5,000,000 | Per 08-28-2020 Financial Plan |
| RRIF Loan A1 (PANYNJ) | \$2,369,000,000 | Per 08-28-2020 Financial Plan, proposed |
| RRIF Loan A2 (NYS) | \$1,923,000,000 | Per 08-28-2020 Financial Plan, proposed |
| RRIF Loan B (NJ) | \$1,643,000,000 | Per 08-28-2020 Financial Plan, proposed |
| RRIF Loan C (Local) | \$205,000,000 | Per 08-28-2020 Financial Plan, proposed |
| Other Amtrak Sources | \$1,282,000,000 | Amtrak Contribution/FRA Grant TBD |

| Project Schedule | | | | | | | | |
|---|-----------------|----------------------------------|------|------|------|------|------|---|
| Phase | Cost Estimate | Schedule | FY21 | FY22 | FY23 | FY24 | FY25 | Notes |
| PE/NEPA | | Jan 2016 - Dec 2020 ^A | | | | | | Cost included in New Tunnel and Concrete Casing |
| New Tunnel and Concrete Casing (Major Construction) | \$9,756,000,000 | Jan 2021 - Jan 2030 | | | | | | |
| Rehab of North River Tunnel Construction | \$1,805,000,000 | Jan 2030 - Jan 2033 | | | | | | |

Notes: (A) The HTP estimated cost estimate and schedule is based on the August 2020 FY2022 FTA CIG HTP Financial Plan Submittal. For the purposes of the FY2022 FTA CIG HTP financial plan submittal, the Project Partners assumed that the environmental review for the new Hudson River Tunnel and rehabilitation of the North River Tunnel would be complete in calendar year 2020. While the FRA and the Project Partners are currently conducting the environmental review, the updated schedule for the FEIS and ROD has not been determined. This schedule will be updated once the FEIS and ROD schedule are finalized.

Gateway: Hudson Tunnel Project

Coordinating Agency: Amtrak

In Partnership With: NJ TRANSIT, Port Authority of NY & NJ,

Gateway Program Development Corporation

Type: Major Backlog

Benefit: Shared

Funding Status: Partially funded

One Year Information

FY21 Budget: \$35,741,495

FY21 Scope: Includes scope under four different projects at Amtrak: 1) Hudson Tunnel Project Design: a) A projectwide engineering services contract modification to support pre-procurement activities for a Design-Build contract for HTP Package 1 (Civil Works), including procurement support for an RFQ/RFP, engineering design support, environmental support services and non-NEPA permitting, risk management, additional contract packaging, and safety and security activities. b) Continuation of supplemental geotechnical borings. c)The start of final design of interior tunnel systems. 2) Hudson Yards Concrete Casing - Section 3 Utility Relocation Early Work: With the bid phase in process in Q4 of FY20, the construction phase will initiate and progress to substantial completion in FY21 with an estimated period of performance of approximately 13-14 months. Work must be complete, by agreement with the developer, by October 1, 2021. Work includes relocation of Long Island Rail Road Emergency Services Building utilities. 3) Hudson Tunnel Project NEPA: Update of the administrative draft Final Environmental Impact Statement (FEIS) that was completed in February 2018 and updated in December 2018. An updated FEIS will be published in coordination with FRA and FTA, followed by Records of Decision by both agencies. 4) Manhattan Property Acquisition: Preparatory activities to purchase Block 675 Lot 1 the key construction staging site and location of the permanent ventilation plant for the new Hudson River Tunnel, and securing a temporary construction easement for Block 675 Lot 12.

FY21 Milestones:

- HYCC-3 Early Work: Electrical Manholes/ Pull Boxes/ Cables; Award Final Design Contract; HYCC-3 Early Work: Fabrication and delivery of long lead equipment (May 2021)
- HYCC-3 Early Work: Compound Canopy/Equipment/ Fence (Jul 2021)
- HYCC-3 Early Work: Splicing, Testing, Commissioning (Sep 2021)

Notes: Hudson Tunnel Project Design, Contract packaging: \$10,963,228; Hudson Yards Concrete Casing Sec 3 Early Work: \$23,237,500; Hudson Tunnel Project NEPA: \$840,767; Hudson Tunnel Property Acquisition: \$700,000 (FY21 Budget only includes Amtrak planned expenditures)

Five Year Information

FY21-25 Funding Available: \$1,949,000,000

 At this funding level, the following phases could be initiated or completed in FY21-25:
 Complete Hudson Yards Concrete Casing Section 3 (Right of Way Preservation Project); Early Work Publish FEIS and obtain FTA and FRA RODS; Purchase necessary properties for Hudson Tunnel Project; Complete final design, contract packaging, Begin RFQ/RFP Process.

FY21-25 Additional Funding Needed: \$11,650,000,000

 With additional funding, the following phases could be initiated or completed in FY21-25 (given resource/ workforce constraints and track outages):
 Award major construction contracts for Tunnel Project.
 Complete property purchases for right-of-way and construction staging. Begin major construction.

Notes: Five year information is per the financial plan for the Hudson Tunnel Project Capital Investment Grant application which has been submitted to FTA. Funding considered available by each modal administration at USDOT is subject to individual administration requirements.

Gateway: Sawtooth Bridges Replacement Project

Coordinating Agency: Amtrak
In Partnership With: NJ TRANSIT, Port Authority of NY & NJ,

Gateway Program Development Corporation Type: Major Backlog Benefit: Shared

Funding Status: Partially funded

General Project Information

Full Project Scope

This project would replace Amtrak Bridges No. 7.80 and No. 7.96, collectively referred to as the "Sawtooth Bridges." The existing bridges are located in the Town of Kearny, Hudson County, New Jersey between Newark Penn Station and Secaucus Junction, and are located directly above or in close proximity to several important rail lines, including the NJ TRANSIT Morris and Essex Line, the former Conrail Center Street Branch, and the PATH WTC rail line. The proposed project would replace an approximately 1.1-mile long segment of existing transportation right-of-way along Amtrak's Northeast Corridor with new structures that would result in a fourtrack segment of the NEC with improved design speeds.

Project Justification

The increasing age of the Sawtooth Bridges, their structural condition, and their two speed-restricted tracks (60 miles per hour) limit the efficiency and reliability of rail operations along this critical segment of the NEC. The Sawtooth Bridges were constructed in 1907 and are nearing the end of their functional life. Amtrak rehabilitated the bridges in the early 1980s yet despite this rehabilitation effort, recent inspections indicate that the Sawtooth Bridges continue to deteriorate. Amtrak conducted an inspection and condition survey in 2013 that found the Sawtooth Bridges to be in poor to very poor condition.

Total Project \$1,600,000,000 Cost

Status of PBCA Agreement: Not available

Cost Derivation Methodology: Opinion of probable cost (conceptual) in 2016 dollars, escalated 3.5% a year to year of expenditure, plus allowance for risk coverage and financing.

PBCA Notes: Not available

Funding sources for entire project history

Amtrak FY21 FRA Grant

\$9,277,500

| Project Schedule | | | | | | | | |
|-------------------------------|-----------------|---------------------|------|------|------|------|------|-------|
| Phase | Cost Estimate | Schedule | FY21 | FY22 | FY23 | FY24 | FY25 | Notes |
| Feasibility/Conceptual Design | \$1,105,860 | Jan 2012 - Jan 2017 | | | | | | |
| NEPA | \$375,000 | Jan 2018 - Sep 2020 | | | | | | |
| PE | \$19,996,735 | Nov 2020 - Sep 2022 | | | | | | |
| Final Design | \$82,167,242 | Dec 2022 - Jan 2025 | | | | | | |
| Construction | \$1,251,172,640 | Jan 2023 - Jan 2029 | | | | | | |

Gateway: Sawtooth Bridges Replacement Project

Coordinating Agency: Amtrak In Partnership With: NJ TRANSIT, Port Authority of NY & NJ, Gateway Program Development Corporation

Type: Major Backlog Funding Status: Partially funded Benefit: Shared

One Year Information

FY21 Budget: \$9,277,500

FY21 Scope: FY 21 scope will include initiation of Preliminary Engineering contract and submission of 15% design package.

FY21 Milestones:

- Preliminary Engineering NTP (Oct 2020)
- Complete Field Investigations (Feb 2021)
- 15% Track and Bridge Concept Design (Jun 2021)

Five Year Information

FY21-25 Funding Available: \$9,277,500

At this funding level, the following phases could be initiated or completed in FY21-25: Preliminary engineering

FY21-25 Additional Funding Needed: \$827,902,431

With additional funding, the following phases could be initiated or completed in FY21-25 (given resource/ workforce constraints and track outages): Complete preliminary engineering, final design, and contract packaging. Conduct bid phase. Award contract and begin construction.

Pelham Bay Bridge Replacement

Coordinating Agency: Amtrak In Partnership With: MTA

Type: Major Backlog Benefit: Sole

Funding Status: Partially funded

General Project Information

Full Project Scope

This project would replace the century-old movable Pelham Bay Bridge, which crosses the Hutchinson River in the Bronx, with either a new, low-level movable, mid-level movable, or a high-level fixed bridge with clearance for marine traffic. Additional funding is required for evaluation of these alternatives and to commence Preliminary Engineering. • Option 1: Two 2-track 70 mph mid-level movable bridges • Option 2: Retain the 2-track 45 mph low-level movable bridge for trains stopping at Co-op City Station and construct two 1-track 100 mph highlevel fixed bridges on each side for express trains. This project also includes an 80 mph improved Pelham Lane Interlocking replacing Pelham Bay Interlocking.

Project Justification

The Pelham Bay Bridge was built in 1907, and the existing Pelham Bay Bridge is a speed restriction on the fastest part of the Hell Gate Line. The movable span consists of a two-track 82-foot long through truss. This bridge creates a bottleneck by constricting traffic down to speeds of 45 mph. The aging bridge still opens frequently for marine traffic and occasionally fails to properly close, creating delays for Amtrak service between Boston and New York as well as delays in freight and commuter service, which use the line. This asset will not provide the reliability needed for future expansion of train operations until the movable span is upgraded. With added MNR PSA trains it will become even more of a capacity bottleneck on the east side of the proposed Co-op City Station.

Total Project \$496,130,000 Cost

Status of PBCA Agreement: Not started

Cost Derivation Methodology: Initial estimate developed from the report "Pelham Bay Bridge Replacement/ Reconstruction Project Conceptual Engineering and Inspection Services Final Feasibility Report FY2015."

PBCA Notes: Not available

Funding sources for entire project history

Amtrak FY18 & prior GCAP

\$2,116,000

| Project Schedule | | | | | | | | |
|-------------------------------|---------------|---------------------|------|------|------|------|------|-------|
| Phase | Cost Estimate | Schedule | FY21 | FY22 | FY23 | FY24 | FY25 | Notes |
| Feasibility/Conceptual Design | \$1,253,636 | Oct 2014 - Sep 2015 | | | | | | |
| Pre-NEPA | | Oct 2017 - Sep 2018 | | | | | | |
| NEPA | \$688,000 | Oct 2019 - Jan 2022 | | | | | | |
| PE/NEPA | \$9,188,364 | Jan 2022 - Jul 2024 | | | | | | |
| Final Design | \$25,000,000 | Jul 2024 - Dec 2028 | | | | | | |
| Construction | \$460,000,000 | Jan 2029 - Mar 2033 | | | | | | |

Pelham Bay Bridge Replacement

Coordinating Agency: Amtrak In Partnership With: MTA

Type: Major Backlog Benefit: Sole

Funding Status: Partially funded

One Year Information

FY21 Budget: Not applicable

FY21 Scope: No activities planed in FY21.

FY21 Milestones:

• Not applicable

Five Year Information

FY21-25 Funding Available: \$0

At this funding level, the following phases could be initiated or completed in FY21-25: Not applicable

FY21-25 Additional Funding Needed: \$15,000,000

With additional funding, the following phases could be initiated or completed in FY21-25 (given resource/ workforce constraints and track outages): If additional funding is provided the project can complete Preliminary Engineering and Final Design.

Notes: The project has been deferred to October 2021 and no work is anticipated in FY21.

Susquehanna River Bridge Replacement: Phase 1

Coordinating Agency: Amtrak In Partnership With: Maryland DOT

Type: Major Backlog Benefit: Shared

Funding Status: Partially funded

General Project Information

Full Project Scope

This project would replace the existing two-track movable Susquehanna River Bridge with a modern highlevel, fixed structure, with two tracks. The project would benefit commuter and intercity rail as well as Norfolk Southern, which uses the segment to access the Port of Baltimore. Using a \$22 million High-Speed Intercity Passenger Rail (HSIPR) grant, preliminary engineering and environmental review were completed in FY17. Additional funding is required for final design and construction.

Project Justification

Built in 1906, the existing two-track bridge is nearing the end of its useful life. The current bridge requires trains to reduce speeds for almost a mile due to its condition. A new asset is required in order to maintain operations through this section of Maryland and additional tracks are needed to meet future demand.

Total Project \$1,885,000,000 Cost

Status of PBCA Agreement: Not started

Cost Derivation Methodology: Project Cost Estimate was based upon Preliminary Engineering Design. The Draft Cost Estimate of \$1.885 Billion was initially prepared November 2016, updated November 2017 and is based on 2017 Dollars. The updates consisted of Contingency and Project Management Costs aligning with Amtrak Project Management Manual Criteria.

PBCA Notes: Not available

Funding sources for entire project history

ARRA/HSIPR \$12,600,000 Amtrak FY19 & prior GCAP \$11,000,000

| Project Schedule | | | | | | | | |
|---|-----------------|---------------------|------|------|------|------|------|---|
| Phase | Cost Estimate | Schedule | FY21 | FY22 | FY23 | FY24 | FY25 | Notes |
| PE/NEPA | \$7,739,367 | May 2012 - May 2017 | | | | | | |
| Lewis Lane OH Bridge Replacement (MDOT/track alignment) Ikea Access Road to MOW Perryville Base (phasing) Havre de Grace High School Athletic Field (ROW alignment) Jean S. Roberts Memorial Park Boat Ramp Relocation (ROW alignment) Demolition of abandoned ROW OH bridges (ROW alignment) Furnace Bay Golf Course OH Bridge Raising (track geometry) and other Miscellaneous items | \$86,200,000 | Jan 2020 - Jan 2024 | | | | | | |
| Final Design | \$50,000,000 | May 2017 - Jun 2024 | | | | | | Based on Previous PM info |
| Construction | \$1,741,060,633 | Jan 2024 - Jan 2030 | | | | | | Based on Latest Hard Dollar Estimate |

Susquehanna River Bridge Replacement: Phase 1

Coordinating Agency: Amtrak
In Partnership With: Maryland DOT

Type: Major Backlog Benefit: Shared

Funding Status: Partially funded

One Year Information

FY21 Budget: \$2,840,000

FY21 Scope: In FY21 we plan to reach the 60% design milestone and move toward the 90% design milestone. We will also look at the potential to perform some small precursor projects that are part of the construction phase.

FY21 Milestones:

Grace Interlocking Design (Precursor Activity) (Sep 2021)

Five Year Information

FY21-25 Funding Available: \$52,840,000

At this funding level, the following phases could be initiated or completed in FY21-25:
 In order to finish the design and begin to accomplish some of the precursor projects leading up to the bridge replacement itself, the funding level called out above (\$50M) would need to be provided. That funding level would allow the design of the new bridge to be completed as well as complete the designs for the precursor projects including Grace Interlocking reconfiguration, a new ballast wash at Perryville, raising of bridge for golf course north of the bridge and the bridge and abutment modifications on the approach to the bridge.

FY21-25 Additional Funding Needed: \$50,000,000

• With additional funding, the following phases could be initiated or completed in FY21-25 (given resource/ workforce constraints and track outages): The phases listed above would be able to be completed if the stated funding levels (\$50M for FY22-25) were met. This represents funding that is needed but not approved. With additional funding, we could complete all design activities and begin/complete many of the precursor projects that must be completed before the bridge itself is replaced.

Notes: The information above is our best guess for milestone accomplishments this year but these assumptions will be adjusted based on funding level received and conversations between Amtrak PM team and Designer of Record. The budget amount displayed reflects the amount requested.

Baltimore Penn Station: Infrastructure Improvements

Coordinating Agency: Amtrak In Partnership With: Maryland DOT

Type: Improvement Benefit: Sole

Funding Status: Fully funded

General Project Information

Full Project Scope

This project will construct two additional platforms to support scheduled Acela overtakes of Northeast Regional and MARC trains. The scope includes a new Track 8 (F) platform, including new vertical access and canopy. The Track 3 existing low-level platform will be rebuilt as an accessible high-level facility, including repairs to the existing elevator and stairs. Additional track, signal, and electric traction improvements are also included to support the platform addition and improvement.

Project Justification

The reconstruction of the existing platform and the construction of a new platform are required to support scheduled increases to the high-speed rail service, specifically overtakes of Northeast Regional and MARC trains in both the southbound and northbound directions.

Total Project \$46,579,089 Cost

Status of PBCA Agreement: Not applicable

Cost Derivation Methodology: Current overall project estimate was developed by the Project PM based on a designer's estimate for GC work, other project costs, and contingency. The current estimate based on the 100% design submission and constructibility review is approximately \$46.58M.

PBCA Notes: Not applicable

Funding sources for entire project

history

RRIF Loan - Amtrak

RRIF Loan (working with Bill Prosser to achieve additional RRIF \$46,579,089

Loan funding need)

Other Amtrak Sources

Amtrak Electric Traction (ET) will be providing the funding for the catenary construction phase.

Project Schedule Cost Estimate Schedule FY21 FY22 FY23 FY24 FY25 Notes PE/NEPA \$50,446 Oct 2017 - Oct 2018 Environmental Consultant Feasibility, Design \$2,574,958 May 2017 - Sep 2020 GC Work on \$28,500,504 Oct 2020 - Feb 2023 Construction Platforms only, FA in Other Oct 2020 - Feb 2023 CM Services, FA work, CPS, Contingency \$15,453,596

Baltimore Penn Station: Infrastructure Improvements

Coordinating Agency: Amtrak
In Partnership With: Maryland DOT

Type: Improvement Benefit: Sole

Funding Status: Fully funded

One Year Information

FY21 Budget: \$16,628,643

FY21 Scope: In FY21, we plan to award a contract to a General Contractor to begin the construction phase of this project. Early construction items include the foundation work for the new Platform 2 and potentially the new Platform 5 as well as the catenary pole foundations for Platform 5 (funded through an Amtrak ET GCAP Project). The demo of the existing Platform 2 and the construction of the new Platform 2 will also begin. Canopy work will also begin for Platform 2 as well as vertical circulation work.

FY21 Milestones:

- NTP General Contractor (Oct 2020)
- Mobilization and start of Construction (Oct 2020)
- Cat pole foundation finish (Nov 2020)

Notes: The milestone information and dates provided above reflect the best assumptions for planned work in FY21. This may be affected by the GCs means and methods and phasing changes that may occur when GC is awarded.

Five Year Information

FY21-25 Funding Available: \$46,579,089

 At this funding level, the following phases could be initiated or completed in FY21-25:
 We expect to complete this project by the end of FY23.

FY21-25 Additional Funding Needed: \$0

 With additional funding, the following phases could be initiated or completed in FY21-25 (given resource/ workforce constraints and track outages): Not applicable

Baltimore Penn Station: Master Plan

Coordinating Agency: Amtrak In Partnership With: Maryland DOT

Type: Improvement Benefit: Shared

Funding Status: Partially funded

General Project Information

Full Project Scope

This project would provide a comprehensive and integrated approach for Baltimore Penn Station to advance key near-term state-of-good-repair projects while establishing a development framework to leverage under utilized assets and accommodate future growth and redevelopment through a public private partnership. Additional funding is required for design and construction of improvements.

Project Justification

Baltimore Penn Station is Amtrak's 8th busiest station serving nearly one million riders and an additional two million commuter passengers each year. The Station is challenged by aging infrastructure that is not conducive modern train operations. Both passenger and employee facilities are in need of improvement, and multimodal connectivity is strained by the station's current configuration. Efforts to advance state-of-good-repair programs, improve rail operations to accommodate additional Acela service, and a private-public partnership for largescale redevelopment will set the future course to realize Baltimore Penn Station as a vibrant transportation hub interwoven within an integrated mixed-use urban district.

Total Project \$115,000,000 Cost

Status of PBCA Agreement: Not started

Cost Derivation Methodology: Total project cost estimate is derived from the scope of work required to bring Baltimore Penn Station into a state of good repair, complete operational facility improvements, and Station modernization and expansion. The original estimates were based on SOGR assessments, and a 2019 set of program requirements. Additional cost information will be the result of continued design development. Contingency rate is N/A.

PBCA Notes: Ongoing coordination with MDOT, MTA, MARC on design and construction of Baltimore Penn Station improvements.

Funding sources for entire project history

BUILD \$6,200,000 \$6.2M MDOT FY20 BUILD Application "Building Baltimore

Penn Station Connections" No awards have been made yet.

\$300,000 Contributed to SOGR 1a 1b Design Maryland DOT

Match for FY20 BUILD Application "Building Baltimore Penn City of Baltimore DOT \$500,000 Station Connections" No awards have been made yet.

Amtrak Annual Federal Grant \$90,000,000

Developer match for FY20 BUILD Application "Building Private Source \$700,000

Baltimore Penn Station Connections" No awards have been

made yet.

Project Schedule Cost Estimate Schedule FY21 FY22 FY23 FY24 FY25 Notes \$2,500,000 Feasibility/Conceptual Design May 2017 - Apr 2020 PE/NEPA \$7,651,000 May 2020 - Oct 2020 \$9,970,000 Oct 2020 - Aug 2021 Final Design Construction \$74,879,000 Nov 2020 - Jan 2023

Baltimore Penn Station: Master Plan

Coordinating Agency: Amtrak In Partnership With: Maryland DOT

Type: Improvement Benefit: Shared

Funding Status: Partially funded

One Year Information

FY21 Budget: \$16,865,226

FY21 Scope: The FY21 scope includes completing design and moving into construction of the Exterior Envelope, and Early Action SOGR improvements, as well as advancing design for the remaining SOGR improvements, station modernization, and concourse expansion.

FY21 Milestones:

- 30% Design Documentation for Station Expansion (Oct 2020)
- NTP for SOGR Exterior Envelope Construction (Dec
- 60% Design Documentation for Station Expansion (Jun 2021)

Five Year Information

FY21-25 Funding Available: \$90,000,000

At this funding level, the following phases could be initiated or completed in FY21-25: Complete design and construction of Baltimore Penn Station building SOGR improvements, modernization, and expansion.

FY21-25 Additional Funding Needed: \$20,000,000

With additional funding, the following phases could be initiated or completed in FY21-25 (given resource/ workforce constraints and track outages): The current scope is limited to repairs, improvements, and concourse expansion of the historic Baltimore Penn Station to meet current and future operational needs. It does not include necessary improvements to station access, exterior circulation, and intermodal connections. Additional funding is needed to complete the reconfiguration of station plazas, curbside transit facilities, TNC's, and bike/scooter share facilities.

Fitter Interlocking (formerly Yale Interlocking)

Coordinating Agency: Amtrak

In Partnership With: Connecticut DOT

Type: Improvement Benefit: Shared

Funding Status: Partially funded

General Project Information

Full Project Scope

This project would include the construction of a new, wired universal interlocking in Clinton, CT that would subdivide a 16-mile interlocking-to-interlocking segment (Guilford and View Interlockings) into two shorter segments, allowing single track operation over a shorter distance during maintenance with less operational disruption. This will improve reliability. Construction would include the installation of #24 clothoidal turn-outs, rail, switch ties, sub-grade, ballast, components of the overhead catenary system, signal transformers, signal cables, signal masts, switch heaters, switch machines, switch houses, instrument houses, and interlocking lighting. Additional funding is necessary for construction.

Project Justification

A new interlocking in Clinton would increase the flexibility of Shore Line East and Amtrak operations. This new interlocking would enable SLE trains to flexibly service the existing and future platforms at Clinton and Madison stations and make greater use of the Clinton siding, a short stretch of third track along the south side of the NEC. By enabling SLE trains to use all platforms and tracks in the area, the interlocking would enable Amtrak and SLE to expand services while reducing train conflicts and their resulting delays.

Total Project \$34,100,000 Cost

Status of PBCA Agreement: Completed

Cost Derivation Methodology: This interlocking reached Final Design, which included an engineer's estimate, in December of 2017. Amtrak's PM group then performed a "validation" effort with Division leadership to enhance the force account assumptions, resulting in the current estimate, in FY18 dollars, of \$32.4M. Some escalation was assumed for different tasks since this is a multi-year project.

PBCA Notes: A PBCA agreement is in place for the Construction phase.

Funding sources for entire Connecticut DOT

Contributing 35% of construction

Amtrak FY20 GCAP + Connecticut DOT

project

Amtrak FY19 & prior GCAP

\$2,030,000 Revised post-COVID figures

history

| Project Schedule | | | | | | | | |
|------------------|---------------|---------------------|------|------|------|------|------|--|
| Phase | Cost Estimate | Schedule | FY21 | FY22 | FY23 | FY24 | FY25 | Notes |
| Final Design | \$1,937,604 | Nov 2015 - Dec 2017 | | | | | | Environmental work continues; \$195K needed for FY18 |
| Construction | \$32,100,000 | Oct 2018 - Dec 2022 | | | | | | Seeking an agreement under the CTDOT Master Agreement |

\$2,329,000

Fitter Interlocking (formerly Yale Interlocking)

Coordinating Agency: Amtrak

In Partnership With: Connecticut DOT

Type: Improvement Benefit: Shared

Funding Status: Partially funded

One Year Information

FY21 Budget: \$3,000,000

FY21 Scope: Resume construction with post-covid funding. Complete procurement of material, complete signal cable relocation and Lancaster shop to complete construction of signal facilities.

FY21 Milestones:

- Begin contractor procurement (Jan 2021)
- C&S complete cable relocation (Feb 2021)
- Lancaster Shop Deliver CIH (May 2021)

Five Year Information

FY21-25 Funding Available: \$3,000,000

At this funding level, the following phases could be initiated or completed in FY21-25: Complete C&S construction of CIH and related cases and huts at Lancaster shop and deliver to New England Division. C&S Division forces to complete cable relocation; ET Division to procure all long lead material and start assembly of arms/hangars.

FY21-25 Additional Funding Needed: \$26,300,000

With additional funding, the following phases could be initiated or completed in FY21-25 (given resource/ workforce constraints and track outages): Complete all construction and cutover new interlocking, including installation of cat poles, track shifts, installation of all Signal facilities, installation of switches, installation of under-drain, and final cut over.

Gateway: Dock Bridge Rehabilitation

Coordinating Agency: Amtrak
In Partnership With: NJ TRANSIT, Port Authority of NY & NJ,

Gateway Program Development Corporation Type: Improvement **Benefit: Shared**

Funding Status: Partially funded

General Project Information

Full Project Scope

Dock Bridge is a complex of three vertical lift structures located along one the busiest sections of the Northeast Corridor (Milepost 8.5), crossing the Passaic River in Newark, NJ. The bridge carries six tracks utilized by Amtrak, NJ TRANSIT and PATH trains. Considerable repairs are needed to this critical asset to restore the bridge to a state of good repair, to maintain reliable operation of the structure, and to preserve safe passage for the more than 720 trains per day that utilize the structure. Required repairs include structural steel painting of towers and spans, repair to the steel members, pier repairs including cathodic protection system, fender replacement, and replacement of movable miter rails with straight rails and counterweight adjustment. This work will prolong the life of the bridge and minimize the risk of more costly rehabilitation in the future, as well as reduce delays associated with bridge openings, pending a permit modification by the U.S. Coast Guard.

Project Justification

The project would perform critical maintenance and rehabilitation work to bring an intensely used infrastructure asset in the busiest section of the Northeast Corridor to a state of good repair, avoiding service disruption and maintaining its useful life.

Total Project \$63,600,000 Cost

PATH

Status of PBCA Agreement: In progress

Cost Derivation Methodology: The cost estimate was developed in Spring 2020 after completing a detailed inspection and load rating of the three spans in January 2020.

PBCA Notes: Dock Bridge has an existing cost sharing agreement between Amtrak and PATH that can be used as a basis for this project.

Funding sources for entire

Amtrak Revenues

\$9,860,000

Committed match to a FY20 Federal State Partnership for

SOGR grant application

\$10,340,000 Committed match to a FY20 Federal State Partnership for

SOGR grant application

project history

FTA Formula Grants

\$11,600,000

NJ TRANSIT, committed match to a FY20 Federal State

Partnership for SOGR grant application

| Project Schedule | | | | | | | | |
|------------------|---------------|---------------------|------|------|------|------|------|-------|
| Phase | Cost Estimate | Schedule | FY21 | FY22 | FY23 | FY24 | FY25 | Notes |
| Design | \$822,000 | Mar 2021 - Feb 2022 | | | | | | |
| Construction | \$62,778,000 | Sep 2022 - Dec 2024 | | | | | | |

Gateway: Dock Bridge Rehabilitation

Coordinating Agency: Amtrak
In Partnership With: NJ TRANSIT, Port Authority of NY & NJ,

Gateway Program Development Corporation Type: Improvement Benefit: Shared

Funding Status: Partially funded

One Year Information

FY21 Budget: \$1,586,245

FY21 Scope: FY 21 scope will include the preliminary design of the rehabilitation program.

FY21 Milestones:

- Anticipated Federal State Partnership SOGR Grant Announcement (Oct 2020)
- Dock Bridge Rehab Design NTP (Mar 2021)
- 30% Design Deliverable (Aug 2021)

Five Year Information

FY21-25 Funding Available: \$31,800,000

At this funding level, the following phases could be initiated or completed in FY21-25: Only design will be completed until grant can be secured for full project amount.

FY21-25 Additional Funding Needed: \$31,800,000

With additional funding, the following phases could be initiated or completed in FY21-25 (given resource/ workforce constraints and track outages): With all funding secured, full project scope will be completed by 2025.

Gateway: Harrison Fourth Track Phase 1

Coordinating Agency: Amtrak In Partnership With: NJ TRANSIT, PATH/Port Authority of NY

& NJ, Gateway Program Development Corporation Type: Improvement Benefit: Shared

Funding Status: Partially funded

General Project Information

Full Project Scope

This project includes the design and construction of approximately 2,000 ft. of additional main track along the Northeast Corridor through the city of Harrison, NJ on the western side of the corridor with new embankment and/or retaining structures, track, signal and third rail systems to allow shifting of the westbound PATH track to this new alignment. The project will identify and design changes necessary to connect the new track with the existing infrastructure and also be coordinated with PATH's on-going Harrison Station replacement project.

Project Justification

This project would allow construction of a new fourth main track through Harrison, NJ using the former PATH track alignment. Currently, the NEC through Harrison consists of three shared commuter/ intercity rail tracks and two additional tracks operated on exclusively by PATH trains between Newark, NJ and Jersey City, NJ and other points east. Through the project site, the two PATH tracks lie immediately adjacent to the three NEC tracks and prevent adding additional NEC tracks due to this configuration. This is another increment in creating the full fourtrack Gateway Program alignment between Newark, NJ and Penn Station, NY.

Cost

Total Project Total Project Cost TBD Status of PBCA Agreement: Not available

Cost Derivation Methodology: Project in early stages of development; cost information not yet available.

PBCA Notes: Not available

Funding sources for entire project history

Amtrak FY20 FRA Grant \$516,649

Amtrak FY21 FRA Grant \$1,660,000

Project Schedule FY21 FY22 FY23 FY24 **Cost Estimate** Schedule FY25 Notes PF/NFPA \$1,115,020 Mar 2020 - Feb 2021 Final Design \$2,915,000 May 2021 - Sep 2022

Gateway: Harrison Fourth Track Phase 1

Coordinating Agency: Amtrak In Partnership With: NJ TRANSIT, PATH/Port Authority of NY

& NJ, Gateway Program Development Corporation Type: Improvement Benefit: Shared

Funding Status: Partially funded

One Year Information

FY21 Budget: \$1,660,000

FY21 Scope: FY 21 Scope will include continuation of Preliminary Engineering through 30 percent design. Following 30 percent design deliverable, a contract mod will be issued for final design and contract packaging to begin in the latter half of the fiscal year.

FY21 Milestones:

- Cat Ex Worksheet Submission (Nov 2020)
- 30% Draft Design Submittal/ Presentation (Nov 2020)
- Submit Final 30% Design (Feb 2021)
- NTP Final Design and Packaging (May 2021)

Five Year Information

FY21-25 Funding Available: \$2,211,649

At this funding level, the following phases could be initiated or completed in FY21-25: Completion of preliminary engineering and start final design and contract packaging

FY21-25 Additional Funding Needed: \$1,315,000

With additional funding, the following phases could be initiated or completed in FY21-25 (given resource/ workforce constraints and track outages): Completion of final design and contract packaging

Notes: Until we have completed P.E. we will not have a reliable cost estimate for project construction.

Hanson Interlocking

Coordinating Agency: Amtrak
In Partnership With: Maryland DOT

Type: Improvement Benefit: Shared

Funding Status: Fully funded

General Project Information

Full Project Scope This project would improve operational flexibility at New Carrollton station and reduce delays for Amtrak and MARC service. A new interlocking would allow universal moves and reduce conflicts that occur when trains must pass other trains stopped at New Carrollton. Construction of Hanson Interlocking would also advance a state of

good repair by allowing for the modification of aging Landover Interlocking.

Project Justification This project will expand capacity and reduce congestion by enabling express and local trains to operate

simultaneously in both directions.

Total Project \$92,187,895 Cost Cost Derivation

\$92,187,895 Status of PBCA Agreement: Not applicable

Cost Derivation Methodology: Total project cost was reassessed in 2017.

PBCA Notes: Not applicable

Funding sources for entire project history FTA Formula Grants \$8,000,000 Additional funding spent in prior fiscal years.

Maryland \$2,000,000 Additional funding spent in prior fiscal years.

Other Amtrak Sources \$82,187,895 Balance of funding required is funded by Amtrak through

written agreement for the cost sharing.

| Project Schedule | | | | | | | | |
|------------------|---------------|---------------------|------|------|------|------|------|-------|
| Phase | Cost Estimate | Schedule | FY21 | FY22 | FY23 | FY24 | FY25 | Notes |
| PE/NEPA | \$1,992,271 | Jun 2009 - May 2015 | | | | | | |
| Final Design | \$857,940 | May 2015 - Dec 2019 | | | | | | |
| Construction | \$84,033,563 | Oct 2011 - Jul 2022 | | | | | | |
| Contingency | \$5,304,121 | Nov 2017 - Jul 2022 | | | | | | |

Hanson Interlocking

Coordinating Agency: Amtrak In Partnership With: Maryland DOT

Type: Improvement Benefit: Shared

Funding Status: Fully funded

One Year Information

FY21 Budget: \$16,812,914

FY21 Scope: Main items for FY21 is to install signal bridges and catenary poles for Hanson. This will involve coordination with Pepco, WMATA, Zayo and Transportation. C&S will work on testing. ET will begin catenary work after poles are installed.

FY21 Milestones:

- Begin Signal Bridge Installation (Oct 2020)
- Complete Signal Bridge Installation (Dec 2020)
- Begin Catenary Pole Installation (Dec 2020)
- Complete Catenary Pole Installation (May 2021)

Five Year Information

FY21-25 Funding Available: \$37,677,895

At this funding level, the following phases could be initiated or completed in FY21-25: At this time, project is projected to be completed in FY22

FY21-25 Additional Funding Needed: \$0

With additional funding, the following phases could be initiated or completed in FY21-25 (given resource/ workforce constraints and track outages): Not applicable

Maryland Section Reliability Improvements

Coordinating Agency: Amtrak
In Partnership With: Maryland DOT

Type: Improvement Benefit: Shared

Funding Status: Fully funded

General Project Information

Full Project Scope This project will upgrade 30 miles of existing Track 1 in Maryland and make associated signal system and track upgrades for higher speed operations on the Washington-to-Baltimore section of the NEC.

Project Justification This section of the NEC operates at or near capacity today and is not able to reliably absorb increases in service without additional infrastructure improvements. This project targets reductions in congestion-related delays and provides new overtake capacity between different classes of service (high-speed, conventional, and commuter), allowing the faster, high-speed trains to pass slower trains. These improvements, along with structural and operational changes, optimize use of this infrastructure and provide the necessary capacity to meet the Service Plan requirements.

Total Project \$20,600,000 Cost Cost Derivation

\$20,600,000 Status of PBCA Agreement: Not available

Cost Derivation Methodology: The Order of Magnitude (OOM) estimate was developed based on a conceptual design. The design did not include any C&S work for signal system modification, Positive Train Control equipment changes or ET catenary wire realignment. There was a new approach developed by the project team to mitigate additional costs associated with the C&S and ET constructions costs.

PBCA Notes: Not available

Funding sources for entire project history RRIF Loan - Amtrak \$20,600,000

| Project Schedule | | | | | | | | |
|------------------|---------------|---------------------|------|------|------|------|------|-------|
| Phase | Cost Estimate | Schedule | FY21 | FY22 | FY23 | FY24 | FY25 | Notes |
| Final Design | \$1,575,396 | Aug 2017 - Dec 2018 | | | | | | |

Maryland Section Reliability Improvements

Coordinating Agency: Amtrak
In Partnership With: Maryland DOT

Type: Improvement Benefit: Shared

Funding Status: Fully funded

One Year Information

FY21 Budget: \$640,111

FY21 Scope: Complete C&S Construction, which includes PTC and signal systems, and prepare built drawings.

FY21 Milestones:

• C&S CONSTRUCTION (PTC and Signal Sys.) (Dec 2020)

Five Year Information

FY21-25 Funding Available: \$640,111

At this funding level, the following phases could be initiated or completed in FY21-25:

1. The C&S Signal System and PTC construction will be completed (FY-21). 2. Complete As built drawings and project close out (FY-21).

FY21-25 Additional Funding Needed: \$0

 With additional funding, the following phases could be initiated or completed in FY21-25 (given resource/ workforce constraints and track outages): Not applicable

Moynihan Station: Phase 2

Coordinating Agency: Amtrak

In Partnership With: MTA, Empire State Development Corporation, Moynihan Station Development Corporation, US

Postal Service

Type: Improvement Benefit: Shared

Funding Status: Fully funded

General Project Information

Full Project Scope

This project expands passenger-handling operations and station services into the historic James A. Farley Post Office building, which will function as the Moynihan Train Hall. This new joint facility will serve as a world-class intercity and commuter passenger boarding concourse for Amtrak and Long Island Rail Road (LIRR) passengers. Phase 1, was completed in FY17 and included the expansion and enhancement of the 33rd Street Connector between Penn Station and the West End Concourse; the extension and widening of the West End Concourse to serve nine of Penn Station's eleven platforms; the development of new vertical access points and passenger circulation space; the creation of new entrances into the West End Concourse through the 31st and 33rd Street corners of the Farley building; and the installation of an emergency ventilation system to improve life safety. Phase 2 is currently underway and entails significant design and construction to create the Moynihan Train Hall. Phase 2 construction will result in an enhanced boarding concourse and customer waiting room, a sky lit atrium, a combined ticketing and baggage unit, a new metropolitan lounge, an emergency platform ventilation system at the perimeter of the Farley building, and improvements to the 33rd Street sub-street corridor connecting Penn Station and Moynihan Station. Moynihan Station Development Corporation (MSDC), the building owner, is coordinating the design of non-train hall work in collaboration with Amtrak and Long Island Rail Road. The project is being managed by the MSDC, a subsidiary of the Empire State Development Corporation, a public benefit corporation of the state of New York and the Port Authority of New York New Jersey, in cooperation with Amtrak and Long Island Rail Road.

Project Justification

When Moynihan Station's train hall construction project is complete, Amtrak will be in a position to move its primary operations into the new facility, which will improve passenger comfort and security, relieve congestion, and enhance accessibility for passengers with disabilities in the busiest train station in the nation.

Total Project \$1,600,000,000 Cost

Status of PBCA Agreement: Not available

Cost Derivation Methodology: The total project cost estimate was not developed by Amtrak, it was developed by New York State's Empire State Development Corporation (ESD).

PBCA Notes: Not available

Funding sources for entire project history

| CMAQ | \$22,000,000 | Penn-Farley Complex; Farley Building Loading Dock |
|----------------------------|---------------|---|
| CMAQ | \$40,165,000 | Penn-Moynihan Station Complex Train-Shed Hardening Project |
| MTA | \$114,000,000 | |
| ESD Corporation TIFIA Loan | \$526,100,000 | |
| ESD Corporation | \$475,300,000 | |
| PANYNJ | \$150,000,000 | |
| RRIF Loan - Amtrak | \$106,000,000 | RRIF Loan for Phase 2 |
| Private Source | \$230,000,000 | Developer payment |

Project Schedule FY21 FY22 FY23 FY24 FY25 Phase Schedule Notes Cost Estimate Construction \$1,594,000,000 May 2017 - Jan 2021

Moynihan Station: Phase 2

Coordinating Agency: Amtrak In Partnership With: MTA, Empire State Development Corporation, Moynihan Station Development Corporation, US

Postal Service

Type: Improvement Benefit: Shared

Funding Status: Fully funded

One Year Information

FY21 Budget: \$50,700,000

FY21 Scope: The FY21 focus will be on construction and activation activities for the opening of Moynihan Train Hall. Activities include: Moynihan Train Hall fit-out construction, furnish the spaces, complete operational readiness planning and execution, complete the execution of agreements and formation of the Train Hall condominium, test the building and security systems, train employees is using the new equipment and the new space, conduct operational trials, and move employees to the Train Hall from NYP and other locations. The Moynihan Train Hall will open to customers in early 2021.

FY21 Milestones:

- Employee Station Familiarization Complete (Nov 2020)
- Signage Complete (Nov 2020)
- Substantial Completion of Amtrak Fit-out (Dec 2020)
- Moynihan Train Hall Opening Day (Dec 2020)
- Prepare Built Drawings (Jan 2021)

Five Year Information

FY21-25 Funding Available: \$50,700,000

At this funding level, the following phases could be initiated or completed in FY21-25: Construction and activation activities for the opening of Moynihan Train Hall. Activities include: Moynihan Train Hall fit-out construction, furnish the spaces, complete operational readiness planning and execution, complete the execution of agreements and formation of the Train Hall condominium, test the building and security systems, train employees in using the new equipment and the new space, conduct operational trials, and move employees to the Train Hall from NYP and other locations. The Moynihan Train Hall will open to customers in December 2020, and back-of-house will be completed in early 2021.

FY21-25 Additional Funding Needed: \$0

With additional funding, the following phases could be initiated or completed in FY21-25 (given resource/ workforce constraints and track outages): Not applicable

New Carrollton Station: Acela 21

Coordinating Agency: Amtrak

In Partnership With:

Type: Improvement Benefit: Sole

Funding Status: Partially funded

General Project Information

Full Project Scope

The scope of work of the New Carrollton Station (NCR) Acela 2021 project includes: 1. New 1,050-foot side platform adjacent to an upgraded Track 1; 2. New vertical access (escalators, elevator and stairs) and required station modifications to access NCR at ground level below the elevated track; and 3. Reinstallation of a freight gauntlet along Track 2 to preserve wide load service through NCR, per Amtrak's statutory freight railroad access requirements.

Project Justification

The New Carrollton Station (NCR) project is an integral component of required infrastructure investments to support the Acela 2021 Program and the 2020 NEC Service Plan, and will improve overall train performance, resulting in reduced trip times, as well as improve operational reliability of all rail services on the south end of Amtrak's NEC. As a result, there would be an enhanced passenger experience.

Total Project Cost

\$35,837,881

Status of PBCA Agreement: In progress

Cost Derivation Methodology: The Total Project Cost Estimate was last updated in October 2018 based on 90% design documents. This estimate includes cost for full design services (15% Design through Issued for Bid Documents); project management; construction phase; construction management; environmental; and contingency costs for Design and Construction phases.

PBCA Notes: Not applicable

Funding sources for entire project history RRIF Loan - Amtrak \$18,200,000

Project Schedule Phase Cost Estimate Schedule FY21 FY22 FY23 FY24 FY25 Notes Final Design End Dec 2020 Construction \$33,700,000 Apr 2021 - May 2023 Construction Construction \$33,700,000 Apr 2021 - May 2023 Construction Cons

New Carrollton Station: Acela 21

Coordinating Agency: Amtrak

In Partnership With:

Type: Improvement Benefit: Sole

Funding Status: Partially funded

One Year Information

FY21 Budget: \$8,490,000

FY21 Scope: Finalize WMATA design package. Finalize 100% design phase. Issue construction NTP. Excavate areas that are sensitive to the WMATA tracks during WMATA's track outage in the Summer of FY21.

FY21 Milestones:

- Submit 2nd WMATA package (Oct 2020)
- Finalize WMATA package (Nov 2020)
- Begin RFP process for construction contractor (Dec 2020)
- Finalize and submit 100% Design (Dec 2020)
- Procurement start (Jan 2021)
- Construction NTP (Mar 2021)

Five Year Information

FY21-25 Funding Available: \$16,200,000

 At this funding level, the following phases could be initiated or completed in FY21-25:
 Complete Design in FY21. Initiate Construction FY21.
 Complete Construction FY23

FY21-25 Additional Funding Needed: \$17,637,881

 With additional funding, the following phases could be initiated or completed in FY21-25 (given resource/ workforce constraints and track outages):
 Complete all construction activities.

New Carrollton Station: SOGR & ADA

Coordinating Agency: Amtrak
In Partnership With: MARC, WMATA

Type: Improvement Benefit: Shared

Funding Status: Partially funded

General Project Information

Full Project Scope The (NCR) New Carrollton Station-(SOGR) State of Good Repair project is to address deficiencies on the existing concrete platform. The scope of work includes: repair platform, replace stair and escalator enclosures, re-paint

canopy steel structure, and replace canopy roofing.

Project Justification As the owner of the NCR station (the structure, platform, and tracks), Amtrak is responsible for state of good

repair (SOGR) improvements.

Total Project \$2,500,000
Cost Cost Derivat

\$2,500,000 Status of PBCA Agreement: Completed

Cost Derivation Methodology: The Total Project Cost Estimate is based on the SOGR Assessments Report completed in July

2018.

PBCA Notes: Design cost

Funding sources for entire project history Federal State Partnership for SOGR \$1,000,000 For FRA Stations Design, FY20 applied

| Project Schedule | | | | | | | | |
|------------------|---------------|---------------------|------|------|------|------|------|-----------------|
| Phase | Cost Estimate | Schedule | FY21 | FY22 | FY23 | FY24 | FY25 | Notes |
| PE/NEPA | \$10,916 | Apr 2020 - Jun 2020 | | | | | | |
| Final Design | \$410,739 | Mar 2020 - Dec 2020 | | | | | | Dependent on |
| Construction | \$2,000,000 | May 2021 - May 2022 | | | | | | funding request |

New Carrollton Station: SOGR & ADA

Coordinating Agency: Amtrak In Partnership With: MARC, WMATA

Type: Improvement Benefit: Shared

Funding Status: Partially funded

One Year Information

FY21 Budget: Not applicable

FY21 Scope: Finish design phase, procure a contractor to commence construction (dependent on funding request of \$1.2M).

FY21 Milestones:

- IFB Submission, complete design (Dec 2020)
- Start construction procurement (Jan 2021)
- Complete construction procurement, issue NTP (Apr 2021)
- Start construction (May 2021)

Five Year Information

FY21-25 Funding Available: \$0

At this funding level, the following phases could be initiated or completed in FY21-25: In FY20, Amtrak contracted with AECOM to advance the design phase toward design development. For FY21, to complete the design phase and start construction, funding of \$1.2M has been requested and is under review.

FY21-25 Additional Funding Needed: \$1,200,000

With additional funding, the following phases could be initiated or completed in FY21-25 (given resource/ workforce constraints and track outages): Complete construction.

Notes: Construction phase estimate will be developed as part of the design phase and coordinated with PMO estimate. Construction phase estimate will include the Designer of Record construction phase services, all other associated cost and contingency. The current construction phase ROM is estimated at +/- \$2M. FY21 activities are dependent on outcome of funding request.

Newark Penn Station: Amtrak Projects

Coordinating Agency: Amtrak

In Partnership With: NJ TRANSIT, PATH

Type: Improvement Benefit: Shared

Funding Status: Partially funded

General Project Information

Full Project Scope

This project involves improvements to the condition, appearance and functionality on Platforms A, B, and C at Newark Penn Station. Both Amtrak and NJ TRANSIT have responsibility to maintain to a state of good repair. To date, work on Platform E has been completed. This scope of this project includes the design and rehabilitation of Platforms A, B, and C; their roof/ canopy structures; and any other repairs deemed necessary by the initial structure assessment. The structural assessment is nearing completion. Once the final document is produced, Amtrak will prepare a "Make Safe Plan" for platform repairs.

Project Justification

The project would create a safer platform environment and boarding conditions for passengers by bringing station areas to a state of good repair and into compliance with USDOT regulations. Due to expansion issues that have occurred over time, the joints at level-boarding platforms are buckling. In many cases, the expansion joints correspond to skewed bearing locations on the viaduct below, complicating the issues at the expansion joints. This project would improve safety and accessibility for all commuters, including physically challenged customers that board and deboard both Amtrak and NJ TRANSIT trains.

Total Project \$123,462,000 Cost Cost Derivation

\$123,462,000 Status of PBCA Agreement: Not applicable

Cost Derivation Methodology: This estimate was created from the State of good Repair Assessment in conjunction with the Force Account Estimate (it was Preliminary as of FY18).

PBCA Notes: Not applicable

Funding sources for entire project history Amtrak BCC's \$303,000 BCCs used for initial structural assessment of the platforms.

Amtrak FY20 & prior GCAP \$262,000

| Project Schedule | | | | | | | | |
|-----------------------|---------------|---------------------|------|------|------|------|------|---|
| Phase | Cost Estimate | Schedule | FY21 | FY22 | FY23 | FY24 | FY25 | Notes |
| SOGR Assessment | \$262,000 | Jul 2017 - Jan 2018 | | | | | | |
| PE/NEPA | \$3,000,000 | Jun 2018 - Jun 2019 | | | | | | NJ TRANSIT and PATH proportional funding agreements pending. |
| Structural Assessment | \$303,000 | Nov 2019 - Sep 2020 | | | | | | |
| Final Design | \$1,500,000 | Oct 2020 - Sep 2022 | | | | | | |
| Construction | \$118,500,000 | Oct 2023 - Sep 2025 | | | | | | NJ TRANSIT and PATH proportional funding agreements pending. |

Newark Penn Station: Amtrak Projects

Coordinating Agency: Amtrak

In Partnership With: NJ TRANSIT, PATH

Type: Improvement Benefit: Shared

Funding Status: Partially funded

One Year Information

FY21 Budget: \$1,000,000

FY21 Scope: Design Consultant to design Refurbishment of Platforms A,B &C including train shed Façade

FY21 Milestones:

- Design Procurement (Oct 2020)
- Design NTP (Jan 2021)
- 30% Submittal (Apr 2021)
- 60% Submission (Jul 2021)

Five Year Information

FY21-25 Funding Available: \$1,000,000

At this funding level, the following phases could be initiated or completed in FY21-25: Begin design activities

FY21-25 Additional Funding Needed: \$91,500,000

With additional funding, the following phases could be initiated or completed in FY21-25 (given resource/ workforce constraints and track outages): Construction

Notes: Design will take one year and will span FY21- FY22

Notes: Track outages dictate the Schedule. Only one platform can be out of service at a time Construction of One platform per year

Next Generation High Speed Fleet Infrastructure: Ivy City/Washington **Terminal Yard Facility Improvements** Coordinating Agency: Amtrak

In Partnership With:

Type: Improvement Benefit: Sole

Funding Status: Fully funded

General Project Information

Full Project Scope

This project will satisfy the anticipated facility and infrastructure improvements and maintenance requirements of a new Tier III High Speed Rail (HSR) fleet, the existing Acela fleet and accommodate an increase in service operations. The Tier III train sets are configured differently from the current Acela trainsets and will require modifications to the existing HSR S&I facilities to adequately service both the existing Acela fleet and the Tier III train sets. Scope of Work for Modifications to Existing HSR S&I includes design and Construction Phase Services (CPS) related to: upper level platforms, 480 VAC wayside power, center platform, potable/wastewater water, Inspection pit, split rail system, Alstom office and material storage, nose access platform, monorail crane and sanding system. Improvements to the Yard are necessary to support storage of the new train sets. This includes removing existing tracks and installing longer tracks (3 electrified and 1 non-electrified) as well as associated utility improvements (lighting, water, electrical duct banks), fencing, wayside power, & other related elements. Additionally, pit modifications within the S&I facility are necessary to support new wheel lathe for truing Tier III train sets.

Project Justification

A new and expanded facility is necessary for commissioning, inspection, service, and maintenance of new HSR equipment, which is expected to be delivered between 2020 and 2022. The facility will improve equipment and operational reliability throughout the Northeast Corridor.

Total Project \$42,900,000 Cost

Status of PBCA Agreement: Not applicable

Cost Derivation Methodology: S&I modifications and wheel lathe pit modifications is based on actual contracted costs. North Storage Track costs are based on Final Design cost estimate. Project cost estimate includes: Design, Construction (including Contracted work and work by Amtrak), Project/Construction Management, & RWP.

PBCA Notes: Not applicable

Funding sources for entire project history

RRIF Loan - Amtrak \$95,600,000

| Project Schedule | | | | | | | | |
|------------------|---------------|---------------------|------|------|------|------|------|--|
| Phase | Cost Estimate | Schedule | FY21 | FY22 | FY23 | FY24 | FY25 | Notes |
| PE/NEPA | \$3,402,136 | Oct 2016 - Sep 2019 | | | | | | |
| Final Design | \$263,857 | Oct 2019 - Jun 2020 | | | | | | |
| Construction | \$39,250,000 | Jan 2020 - Aug 2021 | | | | | | S&I mods (\$13.25M), Storage Tracks (\$18.6M), Pit Mods (\$1.5M), PM/ CM/RWP (\$2M), Contingency (\$3.9M) |

Next Generation High Speed Fleet Infrastructure: Ivy City/Washington Terminal Yard Facility Improvements

Coordinating Agency: Amtrak

In Partnership With:

Type: Improvement Benefit: Sole

Funding Status: Fully funded

One Year Information

FY21 Budget: \$22,400,000

FY21 Scope: Complete S&I facility modifications including fabrication, delivery, installation, testing and commissioning of all specialty equipment, installation of new roof access platforms, installation of new Alstom trailer, and installation of associated utility improvements. Complete North Storage Track installation including all track improvements, catenary improvements, and associated utility improvements, fencing, & wayside power. Complete wheel lathe pit modifications including delivery of new wheel truing machine and associated testing and commissioning.

FY21 Milestones:

- New wheel lathe put in-service (Feb 2021)
- S&I Mods Substantial Completion (Feb 2021)
- North Storage Tracks Substantial Completion (Jun 2021)

Five Year Information

FY21-25 Funding Available: \$22,400,000

 At this funding level, the following phases could be initiated or completed in FY21-25: Expect project to be fully completed with all components in-service/operation by close of FY21.

FY21-25 Additional Funding Needed: \$0

 With additional funding, the following phases could be initiated or completed in FY21-25 (given resource/ workforce constraints and track outages): Not applicable

Notes: Mitigate impacts from covid-19 to manage schedule. Monitor work progress and assure compliance as construction activities are completed. Deliver complete S&I modifications, including O&M manuals, for Mechanical use. Deliver new wheel lathe for Mechanical use. Deliver North Storage Tracks, including 4 new track segments (3 electrified and 1 non-electrified).

Next Generation High Speed Fleet Infrastructure: Ride Quality Investment

Coordinating Agency: Amtrak
In Partnership With: NEC Operators

Type: Improvement Benefit: Shared

Funding Status: Fully funded

General Project Information

Full Project Scope

This project, which consists of two parts, will establish the means and methodology for performing reference surfacing on the NEC main line with the potential for expansion to other lines and maintenance and construction operations. The first project element is the establishment of the positioning network and data management system. This will include a survey of all tracks on the NEC. The second element is the acquisition of three sets of equipment for the ongoing surfacing of the NEC. The purpose of this project is to improve current surfacing practices, which will result in more efficient maintenance operations and better ride quality.

Project Justification

This project is necessary in order to run trains at maximum authorized speeds of 160mph. Amtrak's current surfacing methods are inconsistent throughout the NEC and do not put the track back to a designed position. These methods are outdated and cannot be sustained on a true high speed railroad. The expected result of this project is that all components of surfacing (survey, design, and solutions) will be connected by GPS positioning on the track. By tamping track to a design at a known location, maintenance practices will be reliable and repeatable. The time between tamping maintenance will increase and the wear and tear on track and vehicle components will decrease. This will result in desired track geometry and therefore higher ride quality and passenger comfort.

Total Project \$67,000,000 Cost Cost Derivation

\$67,000,000 Status of PBCA Agreement: Not available

Cost Derivation Methodology: The total project estimate was developed from a conceptual white paper called "Development of a Reference Surfacing System for the NEC."

PBCA Notes: Not available

Funding sources for entire project history RRIF Loan - Amtrak \$67,000,000

Project Schedule FY22 **Cost Estimate** Schedule FY21 FY23 FY24 FY25 Notes Phase Selection of methodology/proof of concept \$13,932,814 Sep 2017 - Sep 2019 Final Design \$53,067,186 Oct 2019 - Sep 2021 Survey, design and equipment purchase

Next Generation High Speed Fleet Infrastructure: Ride Quality Investment

Coordinating Agency: Amtrak
In Partnership With: NEC Operators

Type: Improvement Benefit: Shared

Funding Status: Fully funded

One Year Information

FY21 Budget: \$3,456,396

FY21 Scope: Finish the NEC Baseline LiDAR Survey started in FY-20. The Baseline Survey will produce a 3D point cloud. The 3D point cloud will be used to create the new track alignment designs. Complete CORS Node Densification. The will provide a overlapping GPS correction signal along the entire NEC. Track design for test section of NEC track. C&S and ET design for test section of NEC tracks.

FY21 Milestones:

- Complete CORS Node Densification. (Nov 2020)
- Complete NEC Baseline LiDAR Survey. (Jan 2021)
- Track Design (Mar 2021)
- ET Design (Sep 2021)

Five Year Information

FY21-25 Funding Available: \$14,720,094

 At this funding level, the following phases could be initiated or completed in FY21-25:
 Plan to complete construction for the test section of railroad, training and place the new system into production. Construction will continue under the yearly maintenance budget.

FY21-25 Additional Funding Needed: \$0

 With additional funding, the following phases could be initiated or completed in FY21-25 (given resource/ workforce constraints and track outages): Not applicable

Next Generation High Speed Fleet Infrastructure: Safety Mitigation

Coordinating Agency: Amtrak
In Partnership With: NEC Operators

Type: Improvement Benefit: Shared

Funding Status: Fully funded

General Project Information

Full Project Scope This project will make several investments to allow Amtrak to permit operation of Tier III Trainsets on the NEC at up to the maximum speed of FRA Tier III standards. Amtrak undertook a detailed and lengthy risk analysis that demonstrates that this standard can be met with a limited investment in infrastructure improvements designed to limit intrusions on to the right of way and/or high-speed tracks in designated high-speed zones expected to be used by Acela. These investments include 20 miles of security fencing, 1/2 mile of guardrails, and other provisions associated with the Tier III FRA Waiver.

Project Justification These investments will increase intercity travels speeds and reduce overall travel time.

Total Project Cost \$90,000,000 Status of PBCA Agreement: Not applicable

Cost Derivation Methodology: The total estimate of \$90M was provided by Amtrak Engineering prior to the RRIF funding

authorization granted in August 2016.

PBCA Notes: Not applicable

Funding sources for entire project history RRIF Loan - Amtrak \$90,000,000

| Project Schedule | | | | | | | | | |
|------------------|---------------|---------------------|-----|----|------|------|------|------|-------|
| Phase | Cost Estimate | Schedule | FY2 | 21 | FY22 | FY23 | FY24 | FY25 | Notes |
| Construction | \$90,000,000 | Sep 2017 - Mar 2021 | | | | | | | |

Next Generation High Speed Fleet Infrastructure: Safety Mitigation

Coordinating Agency: Amtrak
In Partnership With: NEC Operators

Type: Improvement Benefit: Shared

Funding Status: Fully funded

One Year Information

FY21 Budget: \$21,464,393

FY21 Scope: GATES/FENCING: The installation of fencing, guard rails and motorized gates at select locations on the NEC, per Tier III FRA Waiver. PTSO: This work will meet the FRA waiver requirements with the design enhancement of the PTSR button installation on Acela 21 trains. MOW: This project is to prevent on track work equipment from collisions that could happen when working on tracks. ADJ TRK: Complete project work and clean up for the two siding are listed below: 1. Merckens Chocolate Lead, Mansfield, MA, MP 204.2 to 204.8, Adjacent to Track 2, Owner: MBTA, maintenance responsibility unknown 2. Blaine Chemical Lead, Mansfield MA MP 204.3 to 204.8, Adjacent to Track 1, Owner MBTA maintenance responsibility unknown – track out of service only used by Amtrak MW

FY21 Milestones:

- GATE: Start Security Gate Installation (Dec 2020)
- Adj Track: Complete Construction (Dec 2020)
- MOW: NTP Collision Avoidance System Phase (Dec 2020)
- PTSO: NTP for Hardware Completion (Oct 2020)

Five Year Information

FY21-25 Funding Available: \$64,021,238

At this funding level, the following phases could be initiated or completed in FY21-25: GATES/FENCING: Complete installation of fencing, guard rails at 18 locations and if approved the installation of 100 motorized gates at select locations on the NEC, per Tier III FRA Waiver. PTSO: Complete the FRA waiver requirements with the design enhancement of the PTSR button installation on Acela 21 trains. MOW: Procure MOW avoidance collusion system to prevent on track work equipment from collisions that could happen when working on tracks. ADJ TRK: Complete construction, clean up and project closeout for the siding upgrades to FRA class 2 listed below: 1. Merckens Chocolate Lead, Mansfield, MA, MP 204.2 to 204.8, Adjacent to Track 2, Owner: MBTA, maintenance responsibility unknown 2. Blaine Chemical Lead, Mansfield MA MP 204.3 to 204.8, Adjacent to Track 1, Owner MBTA maintenance responsibility unknown – track out of service only used by Amtrak MW

FY21-25 Additional Funding Needed: \$0

 With additional funding, the following phases could be initiated or completed in FY21-25 (given resource/ workforce constraints and track outages): Not applicable

Next Generation High Speed Fleet Infrastructure: Southampton St. Yard Facility Improvements

Coordinating Agency: Amtrak In Partnership With: MBTA

Type: Improvement Funding Status: Fully funded Benefit: Sole

General Project Information

Full Project Scope

The project scope includes the design and construction of infrastructure improvements for Southampton Street Yard to support the Next Generation High-Speed Rail (HSR). This project will satisfy the anticipated facility and infrastructure improvements and maintenance requirements of a new Tier III High Speed Rail (HSR) fleet, the existing Acela fleet and accommodate an increase in service operations. The Tier III train sets are configured differently from the current Acela trainsets and will require modifications to the existing HSR S&I facilities to adequately service both the existing Acela fleet and the Tier III train sets. More specifically, Scope of Work for Modifications to Existing HSR S&I includes design and Construction Phase Services (CPS) related to: upper level platforms, 480 VAC wayside power, center platform, potable/wastewater water, Inspection pit, split rail system, Alstom office and material storage, nose access platform, monorail crane and sanding system.

Project Justification

A new and expanded S&I facility is necessary for commissioning, inspection, service, and maintenance of new Next Generation High-Speed Rail equipment, which is expected to be delivered between 2020 and 2022. The facility will improve equipment and operational reliability throughout the Northeast Corridor.

Total Project \$16,000,000 Cost

Status of PBCA Agreement: Not applicable

Cost Derivation Methodology: Project cost estimate based on actual contracted cost derived from 100% design documents. Project cost estimate includes: Design, Construction (including Contracted work and work by Amtrak), Project/Construction Management, & RWP.

PBCA Notes: Not applicable

Funding sources for entire project history

RRIF Loan - Amtrak

\$4,500,000

| Project Schedule | | | | | | | | |
|------------------|---------------|---------------------|------|------|------|------|------|---|
| Phase | Cost Estimate | Schedule | FY21 | FY22 | FY23 | FY24 | FY25 | Notes |
| PE/NEPA | \$520,735 | Oct 2016 - Sep 2019 | | | | | | |
| Final Design | \$79,456 | Oct 2019 - Jan 2020 | | | | | | |
| Construction | \$15,400,000 | Jan 2020 - Aug 2021 | | | | | | Contracted (\$13.525M), Contingency (\$1M), PM/CM/RWP (\$875K) |

Next Generation High Speed Fleet Infrastructure: Southampton St. Yard Facility Improvements

Coordinating Agency: Amtrak
In Partnership With: MBTA

Type: Improvement Benefit: Sole

Funding Status: Fully funded

One Year Information

FY21 Budget: \$8,800,000

FY21 Scope: Complete S&I facility modifications including fabrication, delivery, installation, testing and commissioning of all specialty equipment, installation of new roof access platforms, installation of new Alstom trailer, and installation of associated utility improvements.

FY21 Milestones:

- S&I Mods Substantial Completion (Feb 2021)
- S&I Mods Final Completion (Apr 2021)

Five Year Information

FY21-25 Funding Available: \$8,800,000

 At this funding level, the following phases could be initiated or completed in FY21-25: Expect project to be fully completed with all components in-service/operation by close of FY21.

FY21-25 Additional Funding Needed: \$0

 With additional funding, the following phases could be initiated or completed in FY21-25 (given resource/ workforce constraints and track outages):
 Not applicable

Notes: Mitigate impacts from covid-19 to manage schedule. Monitor work progress and assure compliance as construction activities are completed. Deliver complete S&I modifications, including O&M manuals, for Mechanical use

Notes: Mitigate impacts from covid-19 to manage schedule. Monitor work progress and assure compliance as construction activities are completed. Deliver complete S&I modifications, including O&M manuals, for Mechanical use.

Next Generation High Speed Fleet Infrastructure: Sunnyside Yard **Facility Improvements**

Coordinating Agency: Amtrak

In Partnership With:

Type: Improvement Benefit: Sole

Funding Status: Fully funded

General Project Information

Full Project Scope

This project will satisfy the anticipated facility and infrastructure improvements and maintenance requirements of a new Tier III High Speed Rail (HSR) fleet, the existing Acela fleet and accommodate an increase in service operations. The Tier III train sets are configured differently from the current Acela trainsets and will require modifications to the existing HSR S&I facilities to adequately service both the existing Acela fleet and the Tier III train sets. Scope of Work for Modifications to Existing HSR S&I includes design and Construction Phase Services (CPS) related to: upper level platforms, 480 VAC wayside power, center platform, potable/wastewater water, Inspection pit, split rail system, Alstom office and material storage, nose access platform, monorail crane and sanding system. Yard improvements associated with the project have been added including: demolition of existing constraints (honeywell street ramp and Queens Blvd. staircase) and installing new Honeywell staircase with time clock/shed; install new retaining wall and 3 new electrified storage tracks, realignment of existing yard tracks (EWE and hump tracks); installation of an exterior (covered), elevated service yard platform; and associated utility improvements (lighting, water, communication/electrical duct banks), wayside power, & other related elements.

Project Justification

A new and expanded high-speed rail facility is necessary for commissioning, inspection, service, and maintenance of new Next Generation High-Speed Rail equipment, which is expected to be delivered between 2020 and 2022. The facility will improve equipment and operational reliability in New York and throughout the Northeast Corridor.

Total Project \$108,000,000 Cost

Status of PBCA Agreement: Not applicable

Cost Derivation Methodology: S&I modifications based on actual contracted costs. Ready Track costs for demolition activities are based on Final Design cost estimate while track installation, retaining wall, utility installation, platform costs are based on 30% design. Project cost estimate includes: Design, Construction (including Contracted work and work by Amtrak), Project/ Construction Management, & RWP.

PBCA Notes: Not applicable

Funding sources for entire project history

RRIF Loan - Amtrak \$339,900,000

| Project Schedule | | | | | | | | |
|------------------|---------------|---------------------|------|------|------|------|------|--|
| Phase | Cost Estimate | Schedule | FY21 | FY22 | FY23 | FY24 | FY25 | Notes |
| PE/NEPA | \$13,278,050 | Oct 2016 - Jul 2020 | | | | | | Includes Ready Track Design |
| Final Design | \$3,000,000 | Oct 2019 - Oct 2020 | | | | | | Includes Ready Track Design |
| Construction | \$91,750,000 | Jan 2020 - Apr 2023 | | | | | | S&I mods (\$14.75M), Ready Tracks Demo (\$12M), Ready Tracks Install (\$50M), Contingency (\$10M), PM/CM/RWP (\$5M) |

Next Generation High Speed Fleet Infrastructure: Sunnyside Yard Facility Improvements

Coordinating Agency: Amtrak

In Partnership With:

Type: Improvement Benefit: Sole

Funding Status: Fully funded

One Year Information

FY21 Budget: \$41,600,000

FY21 Scope: Complete S&I facility modifications including fabrication, delivery, installation, testing and commissioning of all specialty equipment, installation of new roof access platforms, installation of new Alstom trailer, and installation of associated utility improvements. Begin demolition and construction activities at Ready Tracks including removal of Honeywell Street Ramp and beginning installation of retaining wall, Honeywell Street staircase, trackwork, and utility work, installation, and track improvements, catenary improvements, and associated utility improvements, fencing, & wayside power.

FY21 Milestones:

- Ready Tracks Package 'B' 100% design (Oct 2020)
- Ready Tracks Package 'A' Construction NTP (Jan 2021)
- S&I Mods Substantial Completion (Feb 2021)
- Ready Tracks Package 'B' Construction NTP (Mar 2021)

Notes: Mitigate impacts from covid-19 to manage schedule. Monitor work

progress and assure compliance as construction activities are completed.

use. Begin Ready Tracks demolition and construction activities.

Deliver complete S&I modifications, including O&M manuals, for Mechanical

Five Year Information

FY21-25 Funding Available: \$147,600,000

At this funding level, the following phases could be initiated or completed in FY21-25:
 Expect S&I mods portion of project to be fully completed with all components in-service/operation by close of FY21. Expect to initiate construction for the Ready Tracks package 'A' and 'B' work in FY21. Expect to complete package 'A' and 'B' work as well as initiate package 'C' work in FY22. Construction for package 'C' expected to be complete in FY23.

FY21-25 Additional Funding Needed: \$0

 With additional funding, the following phases could be initiated or completed in FY21-25 (given resource/ workforce constraints and track outages): Not applicable

Notes: Mitigate impacts from covid-19 to manage schedule. Monitor work progress and assure compliance as construction activities are completed. Deliver complete S&I modifications, including O&M manuals, for Mechanical use. Begin Ready Tracks demolition and construction activities in FY21. Complete demolition activities and construction activities necessary for expanded HSR service in FY22. Complete balance of track improvements necessary for transportation operations in FY23.

Philadelphia 30th Street Station **District Plan Implementation**

Coordinating Agency: Amtrak

In Partnership With: SEPTA, NJ TRANSIT

Type: Improvement Benefit: Shared

Funding Status: Partially funded

General Project Information

Full Project Scope

This project includes immediate and long-term improvements to passenger and rail facilities. Work currently underway includes the completion of a comprehensive assessment of state of good repair needs and focusing on design projects to enhance the customer experience and expanding the capacity of concourse to accommodate anticipated growth in Amtrak ridership. Conceptual design of key station improvement projects has now been completed. As established in the Philadelphia 30th Street Station District Plan, the plan for the station is multiphased and incremental strategy designed to enable sustainable operational growth of 30th Street Station, while unlocking the development potential of the real estate assets over the course of a 35-year horizon. The next key project milestone is a two-phased master developer procurement process that will identify a master development partner to assist Amtrak with implementing state of good repair improvements, developing commercial assets, and maximizing the overall value of 30th Street Station.

Project Justification

Philadelphia 30th Street Station is Amtrak's third busiest station in the nation and Pennsylvania's busiest intermodal station serving Amtrak, Southeastern Pennsylvania Transportation Authority (SEPTA) and NJ TRANSIT. Heavy utilization of the station coupled with deferred maintenance has left 30th Street Station in a state of disrepair. An estimated growth of 3.5 percent in annual ridership will stress state of good repair issues and push the station beyond its operating capacity unless the station is adapted to accommodate this growth.

Total Project \$354,000,000 Cost

Status of PBCA Agreement: Not started

Cost Derivation Methodology: Total project cost estimate is based on a compilation of various plans and reports, specifically the 2014 District Plan, an ongoing Penn Coach Yard Plan (2018), completed 10% concept designs for Station Plaza (2017), North Concourse Expansion (2016), and the West Underground Concourse (2017), in addition to the State of Good Repair Assessment (2018).

PBCA Notes: Due diligence period required to be completed to finalize Design & Construction GMP

Funding sources for entire project history

Amtrak Annual Federal Grant

\$11,964,433

| Project Schedule | | | | | | | | |
|--|---------------|---------------------|------|------|------|------|------|-------|
| Phase | Cost Estimate | Schedule | FY21 | FY22 | FY23 | FY24 | FY25 | Notes |
| Feasibility/Conceptual Design | \$2,877,522 | Jun 2014 - Sep 2016 | | | | | | |
| PE/NEPA | \$8,795,747 | Oct 2016 - Sep 2018 | | | | | | |
| Finalize Feasibility/Conceptual Design | \$4,000,000 | Oct 2018 - Dec 2020 | | | | | | |
| Final Design | \$25,000,000 | Jan 2021 - Jan 2025 | | | | | | |
| Construction | \$313,000,000 | Jan 2022 - Jan 2026 | | | | | | |

Philadelphia 30th Street Station District Plan Implementation

Coordinating Agency: Amtrak

In Partnership With: SEPTA, NJ TRANSIT

Type: Improvement Benefit: Shared

Funding Status: Partially funded

One Year Information

FY21 Budget: \$3,100,000

FY21 Scope: Amtrak will engage with selected development partner to finalize negotiations, execute the Agreement, to be followed by a six (6) month Due Diligence Period. Once the Due Diligence Period is completed to finalize the financial transaction and design construction pricing, Amtrak Board approval will be requested for Financial Close in Q2 FY2021.

FY21 Milestones:

- Complete Due Diligence (Dec 2020)
- Amtrak Board Approval (Feb 2021)
- Financial Close (Mar 2021)
- Finalize 100% Design Documentation (Sep 2021)

Five Year Information

FY21-25 Funding Available: \$203,035,000

 At this funding level, the following phases could be initiated or completed in FY21-25:
 Will be determined during due diligence period and with execution of Financial Close by March 2021.

FY21-25 Additional Funding Needed: Not available

 With additional funding, the following phases could be initiated or completed in FY21-25 (given resource/ workforce constraints and track outages): Not available

Notes: As noted above, the majority of FY 2021 will be dedicated to due diligence activities to finalize documentation for design and construction budget in order to reach financial close by March 2021.

Veltri Interlocking

Coordinating Agency: Amtrak

In Partnership With:

Type: Improvement Benefit: Sole

Funding Status: Fully funded

General Project Information

Full Project Scope

This project would design and install a new universal interlocking VELTRI at MP133 in Mystic, CT. Construction would include the installation of turn-outs, rail, ties, sub-grade, ballast, overhead catenary, signal transformers, signal cables, signal bridges, switch heater, switch machines, switch houses, instrument houses, and interlocking lighting. This new interlocking will be an Amtrak sole use asset.

Project Justification

This new interlocking will provide operating flexibility, improve reliability, allow for future maintenance outages and track possessions, and subdivide an 18-mile interlocking-to-interlocking segment into two shorter segments, allowing single track operation over a shorter distance during maintenance with less operational disruption. This will improve reliability.

Total Project \$35,821,000 Cost

Status of PBCA Agreement: Not applicable

Cost Derivation Methodology: Project cost estimate was derived as an order of magnitude from similar, recent projects. This project is currently in the design stage at the 60% level. The design process will include an engineer's estimate as well as a construction schedule which will be used to update when submitted and validated.

PBCA Notes: Not applicable

Funding sources for entire project history

Amtrak FY19-21 GCAP

\$3,000,000

| Project Schedule | | | | | | | | |
|------------------|---------------|---------------------|------|------|------|------|------|-------|
| Phase | Cost Estimate | Schedule | FY21 | FY22 | FY23 | FY24 | FY25 | Notes |
| Final Design | \$1,900,000 | Jan 2019 - Dec 2020 | | | | | | |
| Construction | \$33,921,000 | Oct 2020 - Sep 2023 | | | | | | |

Veltri Interlocking

Coordinating Agency: Amtrak

In Partnership With:

Type: Improvement Benefit: Sole

Funding Status: Fully funded

One Year Information

FY21 Budget: \$2,000,000

FY21 Scope: Complete design and begin construction of

interlocking.

FY21 Milestones:

• Final Design (Dec 2020)

- Procurement Start (Jul 2021)
- Lancaster Shop Complete (Sep 2021)

Five Year Information

FY21-25 Funding Available: \$2,000,000

 At this funding level, the following phases could be initiated or completed in FY21-25: Complete design and start procurement

FY21-25 Additional Funding Needed: \$29,500,000

 With additional funding, the following phases could be initiated or completed in FY21-25 (given resource/ workforce constraints and track outages):
 Complete construction and cut-over of interlocking

Washington Union Station: **Claytor Concourse Modernization Program**

Coordinating Agency: Amtrak

In Partnership With: Maryland DOT, VRE, Union Station Redevelopment Corporation, Federal Railroad Administration,

WMATA Type: Improvement

Funding Status: Partially funded

Benefit: Shared

General Project Information

Full Project Scope

This program provides design and construction of immediate operational, safety, and passenger experience improvements to the existing passenger concourse at Washington Union Station, known as the Claytor Concourse. Prior to realizing the full Concourse Modernization, there are two predicate projects that need to be implemented. The Amtrak Police Department (APD) requires relocation from their current location in the station to a new, improved facility outside the Claytor Concourse. Design of the new APD 10,000 sf facility was completed in FY18 and construction began in FY19 but was canceled due to leadership involvement. In FY18, Amtrak completed the first predicate project – the relocation and replacement of critical Heating, Ventilation, and Air Conditioning (HVAC) infrastructure. The full Claytor Concourse Modernization will include the renovation of critical passenger areas, the installation of the new glass curtain wall as an entrance to the station from the platforms and the footprint for a new, expanded Metropolitan Lounge (formerly known as the ClubAcela lounge). The modernization will also include constructing back of the house uses on the First Street Level so as to relocate the existing support space from the concourse floor. It will also support the improvement of critical building infrastructure needed to enable the concourse expansion. This infrastructure includes a new emergency generator for the building as well as a new, expanded electrical substation. In FY20, FRA requested that Amtrak consider having USRC deliver the project given the complex ownership issues at the station.

Project Justification

These improvements are needed to correct safety egress issues as well as capacity limitations and to improve the overall passenger experience for Amtrak and commuter riders.

Total Project \$178,801,479 Cost

Status of PBCA Agreement: Not available

Cost Derivation Methodology: Cost estimate includes completed design and construction costs. Concourse construction costs based on 100% design documents. Estimate is in FY14-25 dollars.

PBCA Notes: Not available

Funding sources for entire project history

FRA Rail Safety Grant \$2,350,000

Maryland MTA \$525,000 **HVAC Construction** Union Station Redevelopment \$1,400,000 HVAC Construction

Corporation

Maryland MTA \$468,000 Concourse Planning/Design **VRE** \$125,000 Concourse Planning/Design \$900,000 Concourse Planning/Design

Union Station Redevelopment

Corporation

\$107,883,479

Amtrak Annual Federal Grant RRIF Loan - Amtrak \$65,000,000

Akridge \$150,000 Concourse Planning/Design pre FY19

Project Schedule FY21 FY22 **Cost Estimate** Schedule FY23 FY24 FY25 Notes Phase Construction (HVAC) \$5,800,000 Jun 2016 - Sep 2018 Design (Concourse Modernization Project) \$11,000,000 Nov 2015 - Jan 2019 \$12,000,000 Oct 2018 - Mar 2020 Construction (APD and Electric Workshop Relocation) APD/HVAC/Electric Workshop \$5,321,479 Jan 2014 - Sep 2020 Additional USRC constructibility review; \$2,000,000 Oct 2020 - Sep 2022 design work. \$142,680,000 Oct 2022 - Sep 2025 Construction (Concourse Modernization Project)

Washington Union Station: Claytor Concourse Modernization Program

In Partnership With: Maryland DOT, VRE, Union Station Redevelopment Corporation, Federal Railroad Administration,

WMATA

Type: Improvement Benefit: Shared

Funding Status: Partially funded

Coordinating Agency: Amtrak

One Year Information

FY21 Budget: \$1,417,663

FY21 Scope: USRC will undertake a constructibility of the Concourse project and produce final bid documents to progress the project forward to procurement in late FY21/early FY22.

FY21 Milestones:

USRC Constructibility Review completion (Sep 2021)

Five Year Information

FY21-25 Funding Available: \$146,299,437

 At this funding level, the following phases could be initiated or completed in FY21-25:
 Project will move into construction, with construction taking place FY22- FY25.

FY21-25 Additional Funding Needed: Not available

 With additional funding, the following phases could be initiated or completed in FY21-25 (given resource/ workforce constraints and track outages):
No additional funding is needed other than what is stated above. However, what is stated above is currently planned but must be requested as part of the Amtrak annual grant each year or is already available via the RRIF funding or FRA Safety Grant.

Washington Union Station: Long Term Station Expansion

Coordinating Agency: Amtrak

In Partnership With: Maryland DOT, VRE, Union Station Redevelopment Corporation, Federal Railroad Administration,

District DOT

Type: Improvement Benefit: Shared

Funding Status: Partially funded

General Project Information

Full Project Scope

The Long Term Program builds on the 2012 Washington Union Terminal Master Plan which outlined a long-term vision to redevelop the station to address capacity constraints and aging infrastructure as well as coordinate with the air rights project known as Burnham Place. The Long Term Program consists of a large-scale station expansion including a complete redesign and reconstruction of the rail terminal. This will also include the construction of Burnham Place, which is Akridge's air rights project over the tracks and platforms. This program has begun and is undergoing an Environmental Impact Statement (EIS), a process being led by the Federal Railroad Administration (FRA) and targeted to be complete in FY20. Once that process has concluded, the Long Term Program will require funding for advanced design and program management to begin implementation of the finalized concept followed by full construction. Currently specific projects within this program include: Terminal Infrastructure (concept design of reconstruction of tracks, platforms and related rail infrastructure at Washington Union Station), Cost and Constructibility reviews, geotechnical investigations, and overall execution of the current concept planning and EIS documentation.

Project Justification

The Washington Union Station complex, including passenger, operational, and train handling facilities and infrastructure, is not in a state of good repair. Long-term, the Washington Union Station Expansion Project is evaluating alternatives for station redevelopment to meet growing demand for commuter and intercity rail.

Total Project Cost

\$8,000,000,000

Status of PBCA Agreement: Not started

Cost Derivation Methodology: This is a high level, order of magnitude estimate, based off concept level design. The estimate is in FY13- until project completion year dollars. Contingency rate is not applicable at this point in the process.

PBCA Notes: Not available

Funding sources for entire project history VRE \$575,000
Maryland MTA \$749,000

Union Station Redevelopment \$8,950,000 \$8.3M in prior years; \$650,000 in FY20

Corporation

 Amtrak FY20 GCAP
 \$991,000

 Amtrak FY19 & prior GCAP
 \$11,100,000

 Akridge
 \$4,400,000

Other \$115,944,915 Amtrak and expansion project partners exact contribution

TBD

| Project Schedule | | | | | | | | | |
|-------------------------------|-----------------|---------------------|------|------|------|------|------|-------|--|
| Phase | Cost Estimate | Schedule | FY21 | FY22 | FY23 | FY24 | FY25 | Notes | |
| Feasibility/Conceptual Design | \$8,200,000 | Nov 2013 - Nov 2015 | | | | | | | |
| PE/NEPA | \$20,500,000 | Nov 2015 - Dec 2020 | | | | | | | |
| Future Precedent Projects | \$37,000,000 | Dec 2021 - Dec 2025 | | | | | | | |
| Design | \$70,500,000 | Jan 2023 - Dec 2027 | | | | | | | |
| Construction | \$7,863,800,000 | Jan 2028 - Jan 2040 | | | | | | | |

Washington Union Station: Long Term Station Expansion

Coordinating Agency: Amtrak

In Partnership With: Maryland DOT, VRE, Union Station Redevelopment Corporation, Federal Railroad Administration,

District DOT

Type: Improvement Benefit: Shared

Funding Status: Partially funded

One Year Information

FY21 Budget: \$1,879,871

FY21 Scope: Finalize EIS with Record of Decision. Determine governance structure, funding potential, procurement strategy and next steps to advance project from EIS concept level to design.

FY21 Milestones:

- Record of Decision (Mar 2021)
- Determine roadmap to advance the project with partners (Sep 2021)

Five Year Information

FY21-25 Funding Available: \$115,944,915

At this funding level, the following phases could be initiated or completed in FY21-25:
 In general, need to determine framework for successful execution of this mega project with project stakeholders and partners in order to secure funding and advance the project. Full design of the project will be underway in FY22 - FY25. Additionally Amtrak will in design and construction of necessary rail infrastructure projects to enable successful construction and phasing of the Station Expansion project in the future.

FY21-25 Additional Funding Needed: Not available

• With additional funding, the following phases could be initiated or completed in FY21-25 (given resource/ workforce constraints and track outages): No additional funding is needed other than what is stated above. However, what is stated above is currently planned but must be requested as part of the Amtrak annual grant each year. It is assumed that Station Expansion partners will also be contributing funding in FY22 - FY25. Track outages, engineering design review resources, and Amtrak forces will all be needed to successfully complete the work currently identified.

Washington Union Station: Near Term Rail Program

Coordinating Agency: Amtrak In Partnership With: Maryland DOT, VRE, Union Station Redevelopment Corporation, Federal Railroad Administration Type: Improvement Benefit: Shared

Funding Status: Partially funded

General Project Information

Full Project Scope

The Near Term Rail program provides design and construction of critical rail and infrastructure projects needed to enhance current operational flexibility of the Washington Union Station rail terminal and to provide for the phasing and capacity expansion of the Long Term Program. Projects within the Near Term Rail Program include: (1) Substation 25A Relocation and Catenary Sectionalizing; (2) Crew Base Renovation; and (3) Satellite Commissary Relocation.

Project Justification

These projects are needed to bring operational infrastructure up to a State of Good Repair, fix safety and security deficits and allow for better and more efficient current and future operations at Washington Union Station.

Total Project Cost

\$75,000,000

Status of PBCA Agreement: Not started

Cost Derivation Methodology: This cost includes design of the projects in previous fiscal years. Cost estimates are based on Amtrak and contractor cost estimates during design and into construction. The estimate is in FY15-FY28 dollars.

PBCA Notes: It was assumed that Platform 15/16 would be a shared cost with MARC but that project has been indefinitely deferred. There is potential for cost sharing of Sub 25A as it has benefit to the full terminal.

Funding sources for entire project history

Amtrak Annual Federal Grant

\$36,352,819

| Phase | Cost Estimate | Schedule | FY21 | FY22 | FY23 | FY24 | FY25 | Notes |
|---|---------------|---------------------|------|------|------|------|------|--|
| Work completed in previous FYs including previous design work and Track 8/9 electrification | \$8,280,000 | Oct 2015 - Sep 2019 | | | | | | |
| Design (Relocation of Satellite Commissary) | \$420,000 | Nov 2019 - Mar 2021 | | | | | | Note that the design has been re-scoped. This amount reflects the new design scope and schedule. |
| Design (Crew Base Relocation) | \$1,300,000 | Apr 2017 - Sep 2021 | | | | | | Design delayed due |
| Design (Substation 25A Relocation) | \$1,000,000 | Feb 2018 - Oct 2021 | | | | | | to COVID-19 budget reductions in FY20 |
| Construction (Relocation of Satellite Commissary) | \$9,000,000 | Nov 2021 - Nov 2022 | | | | | | |
| Construction (Crew Base Relocation) | \$17,000,000 | Nov 2022 - Nov 2025 | | | | | | |
| Construction (Substation 25A Relocation) | \$38,000,000 | Mar 2025 - Aug 2028 | | | | | | |

Washington Union Station: Near Term Rail Program

Coordinating Agency: Amtrak In Partnership With: Maryland DOT, VRE, Union Station Redevelopment Corporation, Federal Railroad Administration Type: Improvement Benefit: Shared

Funding Status: Partially funded

One Year Information

FY21 Budget: \$1,131,377

FY21 Scope: Complete design for Satellite Commissary, Crew Base, and Substation 25A. Progress Satellite Commissary to construction procurement during 2nd half of FY21 in order to begin construction at the beginning of FY22.

FY21 Milestones:

- Satellite Commissary design complete (Mar 2021)
- Satellite Commissary construction procurement commences (Apr 2021)
- Crew Base Design complete (Sep 2021)
- Substation 25A design complete (Sep 2021)

Five Year Information

FY21-25 Funding Available: \$28,072,819

At this funding level, the following phases could be initiated or completed in FY21-25: Design completion of all 3 projects. Construction will be completed on Satellite Commissary and Crew Base. Construction will begin in FY25 on Substation 25A.

FY21-25 Additional Funding Needed: Not available

With additional funding, the following phases could be initiated or completed in FY21-25 (given resource/ workforce constraints and track outages): No additional funding is needed other than what is stated above. However, what is stated above is currently planned but must be requested as part of the Amtrak annual grant each year.

Washington Union Station: **Subbasement Program**

Coordinating Agency: Amtrak In Partnership With: Maryland DOT, VRE, Union Station Redevelopment Corporation, Federal Railroad Administration Type: Improvement Benefit: Shared

Funding Status: Partially funded

General Project Information

Full Project Scope

This program includes two projects Track 22 and the Subbasement Reconstruction. The Track 22 project will not only provide Amtrak and VRE with an additional revenue track by which to board and alight trains, it is a necessary precursor to the Subbasement Structural Replacement project so as to provide an additional runthrough track to remain open during the Subbasement project. The Subbasement Reconstruction project will replace the bridging structure at the north portal of the First Street Tunnel spans rail tracks over a back of house station area (known as the Subbasement). The structure is in a state of disrepair and requires replacement. The critical SOGR Project will replace the structurally deficient beams, girders and columns with a new structural support system. The track slab will be replaced and railroad infrastructure will be replaced in kind.

Project Justification

The Subbasement Reconstruction program is a necessary State of Good Repair project, as the Subbasement currently has temporary shoring to keep the track bed for the run-through tracks intact. Collapse of the Subbasement would have significant impacts to not only the NEC but the entire eastern rail network. Track 22 will allow the Subbasement Reconstruction to proceed without major cuts to current service levels.

Total Project \$130,000,000 Cost

Status of PBCA Agreement: In progress

Cost Derivation Methodology: Subbasement cost is based off of 60% design estimates for the previous design and concept rescoped design; Track 22 amounts are based off the current construction contracts and anticipated Amtrak resources required to support and complete the project. The estimate is in FY15-FY25 dollars.

PBCA Notes: VRE is contributing to the Track 22 project. TBD if VRE will contribute to the subbasement reconstruction project.

Funding sources for entire project history

FRA THUD Grant \$19,037,037 Track 22

VRE Matching funds for FRA THUD Grant for Track 22 \$6,300,000

Amtrak Annual Federal Grant \$91,962,963 TBD what funding source will be used for Subbasement

Other Amtrak Sources \$12,700,000

| Project Schedule | | | | | | | | |
|--|---------------|---------------------|------|------|------|------|------|--|
| Phase | Cost Estimate | Schedule | FY21 | FY22 | FY23 | FY24 | FY25 | Notes |
| Track 22 design; supporting items for Track 22 | \$2,375,926 | Nov 2015 - Sep 2019 | | | | | | |
| Subbasement Final Design | \$4,550,000 | Jan 2020 - Jun 2021 | | | | | | This is for the re-scoped project which includes utility relocation design being undertaken by USRC. |
| Track 22 Construction | \$38,074,074 | Mar 2020 - Aug 2022 | | | | | | |
| Subbasement Construction | \$85,000,000 | Dec 2021 - Mar 2025 | | | | | | |

Washington Union Station: Subbasement Program

Coordinating Agency: Amtrak In Partnership With: Maryland DOT, VRE, Union Station Redevelopment Corporation, Federal Railroad Administration Benefit: Shared

Type: Improvement Funding Status: Partially funded

One Year Information

FY21 Budget: \$22,033,042

FY21 Scope: Progress Track 22 construction. Finalize Subbasement design and support USRC led utility relocation and investigation that is needed to advance the Subbasement reconstruction.

FY21 Milestones:

Subbasement final design (Jun 2021)

Five Year Information

FY21-25 Funding Available: \$114,934,426

At this funding level, the following phases could be initiated or completed in FY21-25: Track 22 construction completion in FY22. Subbasement construction completion in FY25

FY21-25 Additional Funding Needed: Not available

With additional funding, the following phases could be initiated or completed in FY21-25 (given resource/ workforce constraints and track outages): No additional funding is needed other than what is stated above. However, what is stated above is currently planned but must be requested as part of the Amtrak annual grant each year.

Devon Bridge Replacement

Coordinating Agency: Connecticut DOT In Partnership With: Amtrak, MTA

Type: Major Backlog Benefit: Shared

Funding Status: Partially funded

General Project Information

Full Project Scope

This project would replace the functionally obsolete 111-year-old Devon Bridge. The bridge, which carries four New Haven Line tracks over the Housatonic River, has experienced serious deterioration, and is the next most critical movable bridge for replacement on the New Haven Line portion of the NEC after the Walk Bridge

Program. Additional funding is required for design and construction of a replacement bridge.

Project Justification Aging movable bridges pose a big risk of long-term major disruption of service along the NEC. These structures require constant maintenance, are functionally obsolete, and well beyond their useful life.

Total Project \$1,100,000,000 Cost

Status of PBCA Agreement: Not started

Cost Derivation Methodology: Project in early stages of development. Construction estimates are preliminary.

Jan 2021 - Jan 2023

Jan 2023 - Jan 2025

Apr 2025 - Apr 2029

PBCA Notes: Not available

Funding sources for entire project history

Phase

PE/NEPA

Final Design

Construction

FTA Formula Grants \$12,000,000 Connecticut \$3,000,000

\$10,000,000

\$45,000,000

\$950,000,000

Project Schedule FY22 FY23 FY24 **Cost Estimate** Schedule FY21 FY25 Notes \$5,000,000 Jun 2016 - Feb 2018 Feasibility/Conceptual Design

Devon Bridge Replacement

Coordinating Agency: Connecticut DOT In Partnership With: Amtrak, MTA

Type: Major Backlog Benefit: Shared

Funding Status: Partially funded

One Year Information

FY21 Budget: \$500,000

FY21 Scope: Design activities will continue with the goal of completing 60% design.

FY21 Milestones:

Not applicable

Five Year Information

FY21-25 Funding Available: \$225,000,000

 At this funding level, the following phases could be initiated or completed in FY21-25:
 Complete Final Design and begin implementing project construction.

FY21-25 Additional Funding Needed: \$0

 With additional funding, the following phases could be initiated or completed in FY21-25 (given resource/ workforce constraints and track outages): Not applicable

Notes: Project on hold to sequence after Walk Bridge

Notes : Project being sequenced behind Walk. Acceleration not feasible.

Saugatuck River Bridge Replacement

Coordinating Agency: Connecticut DOT In Partnership With: Amtrak, MTA

Type: Major Backlog Benefit: Shared

Funding Status: Partially programmed

General Project Information

Full Project Scope The Saugatuck River Bridge is a 458-foot-long bascule bridge constructed in 1904. The bridge is actually not one, but two parallel bridges, each carrying two tracks. Like the Norwalk River Bridge, its age and deferred maintenance have caused deterioration encompassing both its electrical and mechanical components. CTDOT is aiming to fully replace major components of the bridges, including the movable spans and the approach tracks. This work would also include the replacement of mechanical and electrical systems, new signal equipment, and a new operator's house. This new bridge would greatly improve reliability for Amtrak and Metro-North riders, as well as maritime traffic.

Project

Aging movable bridges pose a big risk of long-term major disruption of service along the NEC. These structures require constant maintenance, are functionally obsolete, and well beyond their useful life.

Total Project \$350,000,000 Cost Cost Derivation

Justification

\$350,000,000 Status of PBCA Agreement: Not available

Cost Derivation Methodology: Project cost is based on latest 60% design.

PBCA Notes: Not available

Funding sources for entire project history FTA Formula Grants \$12,560,000

Connecticut \$5,690,000

| Project Schedule | | | | | | | | |
|-------------------------------|---------------|---------------------|------|------|------|------|------|--|
| Phase | Cost Estimate | Schedule | FY21 | FY22 | FY23 | FY24 | FY25 | Notes |
| Feasibility/Conceptual Design | \$750,000 | End Sep 2005 | | | | | | |
| PE/NEPA | \$750,000 | Jan 2007 - Jan 2007 | | | | | | |
| Final Design | \$30,000,000 | Jan 2007 - Jan 2030 | | | | | | Project has been deferred. Phase is paused. With additional funding, phase could resume in FY21-25. |
| Construction | \$325,000,000 | Jan 2030 - Jan 2034 | | | | | | With additional funding, phase could be advanced to begin in FY21-25. |

Saugatuck River Bridge Replacement

Coordinating Agency: Connecticut DOT In Partnership With: Amtrak, MTA

Type: Major Backlog Benefit: Shared

Funding Status: Partially programmed

One Year Information

FY21 Budget: Not applicable

FY21 Scope: No activities planned for FY21

FY21 Milestones:

• Not applicable

Five Year Information

FY21-25 Funding Available: \$0

 At this funding level, the following phases could be initiated or completed in FY21-25: Not applicable

FY21-25 Additional Funding Needed: \$350,000,000

 With additional funding, the following phases could be initiated or completed in FY21-25 (given resource/ workforce constraints and track outages):
 Advance final design and begin construction.

Walk Bridge Program

Coordinating Agency: Connecticut DOT In Partnership With: Amtrak, MTA

Type: Major Backlog Benefit: Shared

Funding Status: Fully programmed

General Project Information

Full Project Scope

This project will replace the functionally obsolete 120-year-old Walk Bridge which has experienced increasing deterioration of electrical and mechanical components. Connecticut DOT has committed to replace this asset with a combination of federal and state funds. Construction will require an extended continuous outage of two tracks where normally four are operational. This change in track availability could cause changes in schedule, decreases in reliability, or even reductions in service. Two additional capital projects in the vicinity of Walk Bridge will help address these concerns. The construction of CP243 interlocking will shorten the block length between Westport and Norwalk while increasing operational flexibility. Additionally, improvements at Dock Yard including the electrification of the lower Danbury Branch will allow for Metro-North trains to turn at Norwalk without increasing congestion on the main line of the NEC. FTA completed NEPA and issued a Finding of No Significant Impact (FONSI) for this project in July 2017. Additionally, the Norwalk Fixed Bridge is included in the package of bridges part of the Walk Bridge Program.

Project Justification

Aging movable bridges pose a big risk of long-term major disruption of service along the NEC. These structures require constant maintenance, are functionally obsolete, and well beyond their useful life. The situation at Walk Bridge is made worse by the fact that all four tracks reside on one movable span. A failure of the span severs the entire NEC.

Total Project \$1,307,000,000 Cost

Status of PBCA Agreement: In progress

Cost Derivation Methodology: Total project cost estimate is based on Final Design, November 2019. Estimate includes PE, construction, incidentals, contingencies, and railroad force account.

PBCA Notes: Not available

Funding sources for entire project history

Federal State Partnership for SOGR \$29,900,000 FY19 Award for Walk Bridge Replacement

\$90,000,000 Match for FY19 SOGR Award Other Amtrak Sources

FTA Formula Grants \$303,000,000 Programmed

Federal Emergency Relief Award \$160,979,022

\$663,760,723 Programmed (includes match for FY19 SOGR Award) **CTDOT**

\$79,700,000 FY20 Award, applied Federal State Partnership for SOGR

Project Schedule Cost Estimate Schedule FY21 FY22 FY23 FY24 FY25 Notes End Dec 2020 Final Design \$234,100,000 Construction Phase 1 \$366,000,000 End Jan 2021 Construction (Phase 2 - Walk) \$706,900,000 Jun 2021 - Sep 2026

Walk Bridge Program

Coordinating Agency: Connecticut DOT In Partnership With: Amtrak, MTA

Type: Major Backlog Benefit: Shared

Funding Status: Fully programmed

One Year Information

FY21 Budget: \$130,000,000

FY21 Scope: Activities include completing design, initiating construction. Work continues on CP243, Danbury, and utility relocations.

FY21 Milestones:

• Complete Final Design (Dec 2020)

Five Year Information

FY21-25 Funding Available: \$1,307,139,754

 At this funding level, the following phases could be initiated or completed in FY21-25: Initiate Construction

FY21-25 Additional Funding Needed: \$59,800,000

 With additional funding, the following phases could be initiated or completed in FY21-25 (given resource/ workforce constraints and track outages):
 All funding would be in place to complete Construction in 2026. This is the remainder of the Amtrak Share and is programmed for the FY 20 and FY21 Fed State Partnership Program.

CTrail Hartford Line Commuter Station Improvements

Coordinating Agency: Connecticut DOT

In Partnership With:

Type: Improvement Benefit: Sole

Funding Status: Partially programmed

General Project Information

Full Project Scope This project will add additional station stops between New Haven, CT to Springfield, MA including North Haven,

Newington, West Hartford, and Enfield.

Project Justification New and upgraded stations between New Haven and Springfield are needed to support the CTrail Hartford Line service which launched in June 2018. This project will increase ridership for the NEC and enhance regional rail

travel in New England.

Total Project \$246,500,000
Cost Cost Derivation

\$246,500,000 Status of PBCA Agreement: Not applicable

Cost Derivation Methodology: Preliminary Design

PBCA Notes: Not applicable

Funding sources for entire project history Let's Go CT \$229,000,000

| Project Schedule | | | | | | | | |
|------------------|---------------|---------------------|------|------|------|------|------|----------------------------|
| Phase | Cost Estimate | Schedule | FY21 | FY22 | FY23 | FY24 | FY25 | Notes |
| Final Design | \$27,500,000 | End Oct 2023 | | | | | | Phased for each station |
| Construction | \$219,000,000 | Oct 2021 - Oct 2025 | | | | | | Depending on avail funding |

CTrail Hartford Line Commuter Station Improvements

Coordinating Agency: Connecticut DOT

In Partnership With:

Type: Improvement Benefit: Sole

Funding Status: Partially programmed

One Year Information

FY21 Budget: \$1,000,000

FY21 Scope: Continue final design

FY21 Milestones:

• Final Design North Haven (Apr 2021)

Five Year Information

FY21-25 Funding Available: \$229,000,000

 At this funding level, the following phases could be initiated or completed in FY21-25: Begin Construction

FY21-25 Additional Funding Needed: \$17,500,000

 With additional funding, the following phases could be initiated or completed in FY21-25 (given resource/ workforce constraints and track outages): Complete construction.

Hartford Line Rail Program: Phases 3B - 5

Coordinating Agency: Connecticut DOT

In Partnership With: Amtrak

Type: Improvement Benefit: Shared

Funding Status: Partially programmed

General Project Information

Full Project Scope The program is being progressed in phases to rebuild and upgrade infrastructure between New Haven, CT and Springfield, MA. The final phases, not yet funded for construction, include adding a second track between Hartford and Enfield, rehabilitating or replacing many bridges and culverts, and improving stations at Windsor and Windsor Locks. The program also includes costs associated with replacing the elevated track structure

through Hartford and the Connecticut River Bridge in Windsor Locks.

Project Justification These investments will improve reliability and allow for increased service of up to 25 round trips per day between New Haven and Springfield on the CT*rail* Hartford Line service, which launched in June 2018. This project will

increase ridership for the NEC and enhance regional rail travel in New England.

Total Project \$221,500,000 Cost Cost Desiration

\$221,500,000

Status of PBCA Agreement: Not applicable

Cost Derivation Methodology: Preliminary Design

PBCA Notes: Not applicable

Funding sources for entire project history Connecticut \$221,500,000

| Project Schedule | | | | | | | | |
|------------------------------|---------------|---------------------|------|------|------|------|------|-------|
| Phase | Cost Estimate | Schedule | FY21 | FY22 | FY23 | FY24 | FY25 | Notes |
| Final Design | \$28,500,000 | End Feb 2020 | | | | | | |
| Construction (Windsor Locks) | \$65,000,000 | Jan 2020 - Jan 2023 | | | | | | |

Hartford Line Rail Program: Phases 3B - 5

Coordinating Agency: Connecticut DOT

In Partnership With: Amtrak

Type: Improvement Benefit: Shared

Funding Status: Partially programmed

One Year Information

FY21 Budget: \$1,000,000

FY21 Scope: Complete Final Design at Windsor Locks.

FY21 Milestones:

• Not applicable

Five Year Information

FY21-25 Funding Available: \$221,500,000

 At this funding level, the following phases could be initiated or completed in FY21-25: Initiate construction at Windsor Locks

FY21-25 Additional Funding Needed: \$184,000,000

 With additional funding, the following phases could be initiated or completed in FY21-25 (given resource/ workforce constraints and track outages): Complete construction at Windsor Locks.

New Haven Line Stations Improvements: Stamford Station

Coordinating Agency: Connecticut DOT In Partnership With: Amtrak, MTA

Type: Improvement **Benefit: Shared**

Funding Status: Fully programmed

General Project Information

Full Project Scope

This program will upgrade and repair the Stamford Station to ensure continued safe operation and improve the passenger experience. Work will increase canopy and windscreen coverage, provide additional pedestrian paths, repair and replace platform sections that are failing due to their age, and ensure ADA compliance. The future program also includes the construction of a pedestrian bridge at Stamford Station as well as a new parking

garage.

Project Justification This program is critical not only to address passenger demands for enhancements at the stations, but also to provide repairs for aging platforms that are beginning to fail due to years of exposure salt and de-icing chemicals.

This program allows for the continued safe operation of the stations.

Total Project \$105,250,000 Cost

Status of PBCA Agreement: Not started

Cost Derivation Methodology: Projects are at different stages of design from concept to final design.

PBCA Notes: Only applicable to certain projects

Funding sources for entire project history

FTA Formula Grants \$53,000,000 **TIGER** \$9,160,000

Connecticut \$43,090,000

| Project Schedule | | | | | | | | |
|----------------------------------|---------------|---------------------|------|------|------|------|------|-------|
| Phase | Cost Estimate | Schedule | FY21 | FY22 | FY23 | FY24 | FY25 | Notes |
| Construction: Elevator/Escalator | \$28,700,000 | End Nov 2018 | | | | | | |
| Final Design: Elevator/Escalator | \$2,300,000 | End Mar 2021 | | | | | | |
| Construction Phase 2: Garage | \$74,250,000 | Jan 2020 - Jan 2022 | | | | | | |

New Haven Line Stations Improvements: Stamford Station

Coordinating Agency: Connecticut DOT In Partnership With: Amtrak, MTA

Type: Improvement Benefit: Shared

Funding Status: Fully programmed

One Year Information

FY21 Budget: \$1,500,000

FY21 Scope: Complete Final Design for Elevator/Escalator

Project

FY21 Milestones:

• Final Design Elevator/Escalator (Mar 2021)

Five Year Information

FY21-25 Funding Available: \$105,250,000

At this funding level, the following phases could be initiated or completed in FY21-25: Begin construction all phases

FY21-25 Additional Funding Needed: \$0

With additional funding, the following phases could be initiated or completed in FY21-25 (given resource/ workforce constraints and track outages): Not applicable

New Haven Line Track Speed Improvement Program

Coordinating Agency: Connecticut DOT In Partnership With: Amtrak, MTA

Type: Improvement Benefit: Shared

Funding Status: Partially programmed

General Project Information

Full Project Scope This program will upgrade a three mile stretch of track in Bridgeport, including the replacement of five fixed undergrade bridges to improve the track speed from 70mph to 90mph. The bridges will be replaced with ballasted decks and improvements will be made to track geometry to lengthen spirals and increase super

elevation.

Project Justification This program is critical not only to address passenger demands for enhancements at the stations, but also to provide repairs for aging platforms that are beginning to fail due to years of exposure salt and de-icing chemicals.

This program allows for the continued safe operation of the stations.

Total Project \$250,000,000
Cost Cost Derivation

\$250,000,000 Status of PBCA Agreement: Not started

Cost Derivation Methodology: Project Scoping

PBCA Notes: Not available

Funding sources for entire project history Connecticut \$26,000,000

| Project Schedule | | | | | | | | |
|-------------------------------|---------------|---------------------|------|------|------|------|------|-------|
| Phase | Cost Estimate | Schedule | FY21 | FY22 | FY23 | FY24 | FY25 | Notes |
| Feasibility/Conceptual Design | | End Dec 2020 | | | | | | |
| PE/NEPA | | End Sep 2021 | | | | | | |
| Final Design | \$26,000,000 | End May 2023 | | | | | | |
| Construction | \$224,000,000 | Oct 2023 - Oct 2026 | | | | | | |

New Haven Line Track Speed Improvement Program

Coordinating Agency: Connecticut DOT In Partnership With: Amtrak, MTA

Type: Improvement Benefit: Shared

Funding Status: Partially programmed

One Year Information

FY21 Budget: \$2,000,000

FY21 Scope: Begin design and complete NEPA

FY21 Milestones:

• PE/NEPA (Sep 2021)

Five Year Information

FY21-25 Funding Available: \$26,000,000

 At this funding level, the following phases could be initiated or completed in FY21-25: Complete Design

FY21-25 Additional Funding Needed: \$224,000,000

 With additional funding, the following phases could be initiated or completed in FY21-25 (given resource/ workforce constraints and track outages):
 Begin Construction

New Haven Line Yard and Facility Program

Coordinating Agency: Connecticut DOT

In Partnership With: MTA

Type: Improvement Benefit: Sole

Funding Status: Fully programmed

General Project Information

Full Project Scope This project is a multi-year initiative that receives funding on an annual basis to store and maintain the rail fleet and spare parts and includes improvements at all yard facilities statewide. Additional funding would design and construct other modernization elements, including new facilities to improve efficiency and allow for growth.

Project Justification Continued funding for this project is vital to the ability of the State of Connecticut to effectively store and maintain its passenger rail fleet. The upgrade of the Connecticut commuter fleet requires new facilities to maintain the vehicles and store parts. This is a project is critical to CTDOT's fleet strategy. Lack of funding will jeopardize the significant investment that Connecticut has made in a state of the art rail passenger fleet.

Total Project \$477,000,000 Cost Cost Derivation

\$477,000,000 Status of PBCA Agreement: Not applicable

 $Cost\ Derivation\ Methodology: {\bf Conceptual\ design}$

PBCA Notes: Not applicable

Funding sources for entire project history Connecticut \$477,000,000

| Project Schedule | | | | | | | | | |
|---------------------------|---------------|---------------------|------|------|------|------|------|-------|--|
| Phase | Cost Estimate | Schedule | FY21 | FY22 | FY23 | FY24 | FY25 | Notes | |
| Final Design S&I Shop | \$47,000,000 | End Apr 2021 | | | | | | | |
| Construction S&I | \$430,000,000 | Sep 2021 - Oct 2023 | | | | | | | |
| Construction Other Phases | | Start Apr 2022 | | | | | | | |

New Haven Line Yard and Facility Program

Coordinating Agency: Connecticut DOT

In Partnership With: MTA

Type: Improvement Benefit: Sole

Funding Status: Fully programmed

One Year Information

FY21 Budget: \$1,000,000

FY21 Scope: Final Design S&I (Service and Inspection) Shop

FY21 Milestones:

• Final Design S&I (Apr 2021)

Five Year Information

FY21-25 Funding Available: \$477,000,000

 At this funding level, the following phases could be initiated or completed in FY21-25:
 Begin Construction on S&I shop and Car and Diesel Shop, complete design on yard expansion.

FY21-25 Additional Funding Needed: Not available

 With additional funding, the following phases could be initiated or completed in FY21-25 (given resource/ workforce constraints and track outages): Not available

Shore Line East Station Improvements

Coordinating Agency: Connecticut DOT

In Partnership With: Amtrak

Type: Improvement Benefit: Sole

Funding Status: Fully programmed

General Project Information

Full Project Scope This project is a series of investments to expand and improve stations, constructing two high-level platforms, improved waiting areas, and expanded parking at several stations. Work is underway at Clinton Station and

design has begun on a plan to expand Madison Station to dual platforms.

Project Justification When Shore Line East service was launched in the 1990s, most stations featured a single low-level platform along the eastbound track. As a result, westbound trains have been required to switch tracks to service these stations, which consumes capacity and creates conflicts with other trains. Two high-level platforms with a pedestrian bridge connection is critical to true bi-directional traffic for Shore Line East trains and has the added benefit of increasing

capacity on this segment of the NEC.

Total Project \$32,000,000
Cost Cost Desiration

\$32,000,000 Status of PBCA Agreement: Not applicable

Cost Derivation Methodology: Concept Design

PBCA Notes: Not applicable

Funding sources for entire project history Connecticut \$32,000,000

| Project Schedule | | | | | | | | |
|------------------|---------------|---------------------|------|------|------|------|------|-------|
| Phase | Cost Estimate | Schedule | FY21 | FY22 | FY23 | FY24 | FY25 | Notes |
| Final Design | | End Apr 2021 | | | | | | |
| Construction | \$32,000,000 | Oct 2021 - Oct 2023 | | | | | | |

Shore Line East Station Improvements

Coordinating Agency: Connecticut DOT

In Partnership With: Amtrak

Type: Improvement Benefit: Sole

Funding Status: Fully programmed

One Year Information

FY21 Budget: \$1,000,000

FY21 Scope: Complete Final Design

FY21 Milestones:

• Final Design (Apr 2021)

Five Year Information

FY21-25 Funding Available: \$32,000,000

 At this funding level, the following phases could be initiated or completed in FY21-25: Complete Construction

FY21-25 Additional Funding Needed: Not available

 With additional funding, the following phases could be initiated or completed in FY21-25 (given resource/ workforce constraints and track outages): Not available

Shore Line East Track & Catenary Improvements (FY22)

Coordinating Agency: Connecticut DOT

In Partnership With: Amtrak

Type: Improvement Benefit: Shared

Funding Status: Fully programmed

General Project Information

Full Project Scope This project will install electric catenary over the platform track at New London station to support future Shore

Line East electric service.

Project Justification This project, by allowing the use of electric powered equipment on Shore Line East, is critical to Connecticut's statewide fleet management plan. The use of electric powered equipment on Shore Line East will also provide

benefits to users of the NEC main line.

Total Project \$10,000,000
Cost Cost Derivation

\$10,000,000 Status of PBCA Agreement: Not applicable

Cost Derivation Methodology: Final Design

PBCA Notes: Not applicable

Funding sources for entire project history **Connecticut** \$10,000,000

| Project Schedule | | | | | | | | | |
|------------------|---------------|---------------------|----|----|------|------|------|------|-------|
| Phase | Cost Estimate | Schedule | FY | 21 | FY22 | FY23 | FY24 | FY25 | Notes |
| Construction | \$10,000,000 | Apr 2021 - Apr 2022 | | | | | | | |

Shore Line East Track & Catenary Improvements (FY22)

Coordinating Agency: Connecticut DOT

In Partnership With: Amtrak

Type: Improvement Benefit: Shared

Funding Status: Fully programmed

One Year Information

FY21 Budget: \$10,000,000

FY21 Scope: Start construction

FY21 Milestones:

• Construction (Apr 2021)

Five Year Information

FY21-25 Funding Available: \$10,000,000

At this funding level, the following phases could be initiated or completed in FY21-25:

Start construction

FY21-25 Additional Funding Needed: Not available

With additional funding, the following phases could be initiated or completed in FY21-25 (given resource/ workforce constraints and track outages):

Not available

Claymont Regional Transportation Center

Coordinating Agency: Delaware DOT In Partnership With: Amtrak, SEPTA

Type: Improvement Benefit: Sole

Funding Status: Fully funded

General Project Information

Full Project Scope

This project replaces the existing Claymont, DE train station. The new station will be located north of the current site to the former Evraz Steel Site in Claymont, Delaware. It will meet all current ADA standards, with two high-level platforms and a pedestrian overpass over the NEC. The new station will be a multi-modal transportation center with improved access for bus transit, bicycles, and pedestrians. The project includes the construction of a parking garage and provide rail and bus riders with state-of-the-art amenities.

Project Justification

The current Claymont Station does not meet current accessibility standards although it is ADA compliant in the form of wheel chair lifts to a tunnel under the NEC and mini-high platforms. The tunnel has a flooding risk because of the high water table. The station is also located on a curve of the NEC causing trains to sit at an angle which is not an optimal situation for loading and unloading trains. In addition, the 504 parking spaces at are capacity and vehicular and transit access to the station are congested. The project is also coordinated with redevelopment of the former industrial site and will spark economic activity. The project will increase passenger safety, greater accessibility to the station and trains, passenger convenience and regional rail service.

Total Project \$71,425,235

Cost

\$71,425,235 Status of PBCA Agreement: Not available

Cost Derivation Methodology: The project costs were updated after the award of the Design Build contract in January 2019.

PBCA Notes: Not available

Funding FTA Formula Grants \$32,365,935

sources for entire \$10,000,000 2016

project Delaware \$29,032,637 history Other \$26,663

| Project Schedule | | | | | | | | |
|------------------|---------------|---------------------|------|------|------|------|------|---|
| Phase | Cost Estimate | Schedule | FY21 | FY22 | FY23 | FY24 | FY25 | Notes |
| PE/NEPA | \$6,726,663 | Jan 2016 - Dec 2020 | | | | | | NEPA revision was approved on August 2018. Pieces of the PE phase are still on-going due to the ET Project |
| Construction | \$64,698,572 | Jan 2019 - Oct 2022 | | | | | | *includes Design Build Contract (CON), Contingency, Construction Engineering Services, and Railroad |

Claymont Regional Transportation Center

Coordinating Agency: Delaware DOT In Partnership With: Amtrak, SEPTA

Type: Improvement Benefit: Sole

Funding Status: Fully funded

One Year Information

FY21 Budget: \$32,217,097

FY21 Scope: The Design/Build Team will finalize the project design. The team will continue to continue to commence construction activities on approved design elements. The start of the construction of the parking garage, parking lot, and roadway elements are scheduled for FY21. The team also hopes that the ET project will be finalized in design and will be able to begin construction.

FY21 Milestones:

- Start of garage construction. (Nov 2020)
- Start of Station construction. (Apr 2021)
- Completion of Project Design (Jun 2021)

Five Year Information

FY21-25 Funding Available: \$58,590,797

 At this funding level, the following phases could be initiated or completed in FY21-25: Project is expected to complete all phases within FY 21-25. The design/build contract is currently anticipated to be completed in FY 23.

FY21-25 Additional Funding Needed: \$0

 With additional funding, the following phases could be initiated or completed in FY21-25 (given resource/ workforce constraints and track outages): Not applicable

Notes: In FY21 the project design/build team will continue to design various project components and work with DelDOT and Amtrak to obtain approval of those designs. The design work will include completing final design for the construction phase. Construction of infrastructure, the garage and station is scheduled to commence in FY21.

Notes: This project was awarded as a design build contract in Jan 2019. The project is currently anticipated to be completed in FY23.

Delaware Third Track Program

Coordinating Agency: Delaware DOT

In Partnership With: Amtrak

Type: Improvement Benefit: Shared

Funding Status: Fully funded

General Project Information

Full Project Scope This project will increase capacity for intercity and commuter service between Wilmington and Newark, DE by eliminating a current two-track bottleneck and thereby restoring a third track through most of the state. This joint

Amtrak/Delaware DOT project is funded by a combination of federal and state sources.

Project Justification This project will remedy a choke point south of Wilmington, DE where the NEC, otherwise three tracks, has only two crossing a bridge over Mill Creek. A former third track was removed during NECIP and is being restored to provide capacity and service reliability for intercity and commuter service. The project increases regional rail and Amtrak to improve on-time performance while also increasing service to the Wilmington/Newark Line stations.

The project improves and updates infrastructure along the Delaware NEC corridor.

Total Project \$45,000,000

\$45,000,000 Status of PBCA Agreement: In progress

Cost

Cost Derivation Methodology: Based on final design as of February 18, 2011.

PBCA Notes: Not available

Funding ARRA/HSIPR \$13,300,000 sources for entire project history FHWA \$16,576,626 history \$10,789,139

| Project Schedule | | | | | | | | |
|------------------|---------------|---------------------|------|------|------|------|------|-------|
| Phase | Cost Estimate | Schedule | FY21 | FY22 | FY23 | FY24 | FY25 | Notes |
| PE/NEPA | | End Jul 2011 | | | | | | |
| Construction | \$55,455,001 | Apr 2012 - Sep 2020 | | | | | | |
| Project Closeout | TBD | End Jun 2021 | | | | | | |

Delaware Third Track Program

Coordinating Agency: Delaware DOT

In Partnership With: Amtrak

Type: Improvement Benefit: Shared

Funding Status: Fully funded

One Year Information

FY21 Budget: Not applicable

FY21 Scope: Construction cut and throw track work is expected to be completed in September 2020 with project closeout activities thereafter in FY21.

FY21 Milestones:

- Project closeout work (Jan 2021)
- Grant Closeout (Jun 2021)

Five Year Information

FY21-25 Funding Available:

 At this funding level, the following phases could be initiated or completed in FY21-25: Project closeout

FY21-25 Additional Funding Needed: \$0

 With additional funding, the following phases could be initiated or completed in FY21-25 (given resource/ workforce constraints and track outages): Not applicable

Newark (DE) Regional **Transportation Center**

Coordinating Agency: Delaware DOT In Partnership With: Amtrak, SEPTA

Type: Improvement Benefit: Shared

Funding Status: Fully funded

General Project Information

Full Project Scope

This project will construct an updated Regional Transportation Center in Newark, DE that will increase capacity and support additional SEPTA service between Newark and Wilmington, DE. The project includes construction of a new station house, a new platform, a new freight track connection, and a new pedestrian bridge so passengers are not forced to cross an active track. The project will make the station ADA-compliant, eliminate conflicts with freight operations, and permit expansion of regional and commuter service. This project is funded by a combination of federal, state, and local sources.

Project Justification

Improve passenger safety by improving ADA access to the platforms and trains and eliminating Amtrak passengers current requirement to board and disembark from active tracks. Increase the number of regional rail and Amtrak trains that can service the stations. Provide rail and bus passengers with state-of-the-art amenities and more convenient access to the station. The project will also eliminate passenger and freight operations at the station thereby increasing passenger convenience.

Total Project \$88,879,328 Cost

Status of PBCA Agreement: Not available

Cost Derivation Methodology: Design costs are based on actual design contracts awarded. Several of the construction contracts have already been constructed or awarded, so the costs for those contracts reflect actual construction costs such as the increase and improvement of parking lots. Future construction estimates are based on the 60% design, developed in 2017. Plans have changed since that estimate due to further coordination with Amtrak. Remaining construction estimate will be updated when 90% plans are submitted, later in 2020. Remaining contract design to be completed and bid include C&S design work. The completion and approval of this design work is scheduled for May 2021.

PBCA Notes: Not available

Funding sources for entire project

history

FTA Formula Grants \$10,000,000

TIGER \$10,000,000 TIGER IV

Delaware \$65,579,328

City of Newark, WILMAPCO, New \$300,000

Castle County

University of Delaware \$3,000,000

| Project Schedule | | | | | | | | |
|------------------|---------------|---------------------|------|------|------|------|------|-------|
| Phase | Cost Estimate | Schedule | FY21 | FY22 | FY23 | FY24 | FY25 | Notes |
| PE/NEPA | \$6,778,014 | Jul 2013 - Dec 2015 | | | | | | |
| Final Design | \$10,283,122 | Nov 2015 - Mar 2021 | | | | | | |
| Construction | \$71,818,192 | May 2017 - Dec 2022 | | | | | | |

Newark (DE) Regional Transportation Center

Coordinating Agency: Delaware DOT In Partnership With: Amtrak, SEPTA

Type: Improvement Benefit: Shared

Funding Status: Fully funded

One Year Information

FY21 Budget: \$19,259,786

FY21 Scope: Complete final design, begin DelDOT and Amtrak force account construction contracts for Track A relocation.

FY21 Milestones:

- 100% C&S Design (May 2021)
- Bid Advanced Grading contract for Track A relocation (Jul 2021)

Five Year Information

FY21-25 Funding Available: \$28,709,786

 At this funding level, the following phases could be initiated or completed in FY21-25: 100% Design and station construction complete. Anticipated construction completion of track work, pedestrian bridge and platform is currently estimated to occur in FY23.100% Design and station construction complete.

FY21-25 Additional Funding Needed: \$0

 With additional funding, the following phases could be initiated or completed in FY21-25 (given resource/ workforce constraints and track outages): Not applicable

Notes: Milestone completion as projected is dependent upon reaching agreement regarding the design of work with Amtrak, and in part Norfolk Southern.

MARC Storage Improvements: Martin Airport

Coordinating Agency: Maryland DOT

In Partnership With:

Type: Improvement Benefit: Sole

Funding Status: Unfunded

General Project Information

Full Project Scope This project will construct additional storage tracks and related infrastructure at the Martin State Airport Facility, including catenary to support two trainsets with electric locomotives.

Project Justification MARC Trains currently occupy track at Baltimore Penn Station for overnight and weekend storage and layover. Amtrak plans to re-purpose one of the tracks currently used by MARC Train into a through-running revenue track with a new platform edge. This improvement at Martin's Yard will allow MARC Train to accommodate the trains displaced from Penn Station. The project will also result in additional seating capacity for MARC Penn Line Train service as well as reduced operating costs.

Total Project \$15,314,343
Cost Cost Derivation

\$15,314,343 Status of PBCA Agreement: Not applicable

Cost Derivation Methodology: Total Project Cost is based on combined Project Phase costs. Preliminary Planning/Preliminary Engineering allocation of \$1.4M for Planning and Design, ROW acquisition allocation of \$2.2M for purchase of required private property in fee and associated easements, Construction Phase allocation of \$11.81M. Combined project cost is estimated using Standard MTA methodology for the current status at 85% design.

PBCA Notes: Not applicable

Maryland

Funding sources for entire project history FTA Formula Grants \$7,832,000 Additional funding spent in prior fiscal years.

\$8,633,000 Additional funding spent in prior fiscal years.

| Project Schedule | | | | | | | | | | |
|---------------------------------|---------------|---------------------|---|-----|------|----|----|------|------|-------|
| Phase | Cost Estimate | Schedule | F | Y21 | FY22 | FY | 23 | FY24 | FY25 | Notes |
| Final Design | \$384,726 | Jan 2021 - Mar 2021 | | | | | | | | |
| Construction Management/Support | \$3,335,767 | Mar 2021 - Mar 2023 | | | | | | | | |
| Construction | \$8,476,375 | Jun 2022 - Mar 2023 | | | | | | | | |

MARC Storage Improvements: Martin Airport

Coordinating Agency: Maryland DOT

In Partnership With:

Type: Improvement Benefit: Sole

Funding Status: Unfunded

One Year Information

FY21 Budget: Not applicable

FY21 Scope: No activities planned for FY21

FY21 Milestones:

Not applicable

Five Year Information

FY21-25 Funding Available: \$0

 At this funding level, the following phases could be initiated or completed in FY21-25: Not applicable

FY21-25 Additional Funding Needed: \$13,000,000

 With additional funding, the following phases could be initiated or completed in FY21-25 (given resource/ workforce constraints and track outages): Construction/Project Completion (note that \$13M is an estimate; awaiting completion of Final Design for final fully loaded cost estimate)

Notes: All on hold due to COVID-19 and funding.

Martin State Airport Station Replacement

Coordinating Agency: Maryland DOT

In Partnership With: Amtrak

Type: Improvement Benefit: Shared

Funding Status: Unfunded

General Project Information

Full Project Scope

Replace the existing MARC Martin State Airport Station with a new ADA-compliant high-level platform station. The current station is low level boarding with at-grade crosswalks to access multiple tracks on the NEC. An elevated pedestrian walkway to the new high-level platforms will be constructed, with elevators or some other means of ADA accessibility.

Project Justification

The existing Martins Station has low level passenger boarding and requires passengers to cross existing mainline tracks to access the trains. This is the only such station on the NEC between DC and NYC. There is a significant risk of harm to passengers and trespassers at this station. This risk has been realized in the past and concern has been expressed by our passengers and train crews. FRA recently released rules that may increase speeds on this track segment, which increase the risks and hazards associated with the current level boarding and track crosswalks.

Total Project \$80,000,000 Cost

Status of PBCA Agreement: Not available

Cost Derivation Methodology: The Total Project Cost Estimate is a Rough-Order-of-Magnitude (ROM) cost used for planning purposes. A fully loaded cost estimate will be prepared as part of any NEPA/30% design efforts.

PBCA Notes: Not available

Funding sources for entire project history

Not available

| Project Schedule | | | | | | | | | |
|-----------------------------|---------------|---------------------|------|------|------|------|------|--|--|
| Phase | Cost Estimate | Schedule | FY21 | FY22 | FY23 | FY24 | FY25 | Notes | |
| Finalization of 100% Design | | Jan 2021 - Mar 2021 | | | | | | | |
| Procurement Activities | | Apr 2021 - Oct 2021 | | | | | | Schedule assumes funding is identified | |
| Construction | | Nov 2021 - Nov 2022 | | | | | | | |

Martin State Airport Station Replacement

Coordinating Agency: Maryland DOT

In Partnership With: Amtrak

Type: Improvement Benefit: Shared

Funding Status: Unfunded

One Year Information

FY21 Budget: Not applicable

FY21 Scope: No activities planned for FY21

FY21 Milestones:

• Not applicable

Five Year Information

FY21-25 Funding Available: \$0

At this funding level, the following phases could be initiated or completed in FY21-25: Not applicable

FY21-25 Additional Funding Needed: \$950,000

With additional funding, the following phases could be initiated or completed in FY21-25 (given resource/ workforce constraints and track outages): 30% Design/NEPA, 65% Design, 85% Design, 100% (Final) Design, Procurement for Construction Services, Construction (potentially).

Penn-Camden Connector

Coordinating Agency: Maryland DOT

In Partnership With: Amtrak

Type: Improvement Benefit: Shared

Funding Status: Unfunded

General Project Information

Full Project Scope

Construct a rail connection between Penn Line (Northeast Corridor) and Camden Line, using a mixture of existing rail right-of-way and privately-owned properties. The "Penn-Camden Connector" will provide storage for MARC Penn Line trainsets, provide storage tracks long enough to support some 10-car consists, and construct a more direct connection to the MARC Riverside Maintenance Facility where MARC maintains its diesel locomotives.

Project Justification The connection will allow MARC to more efficiently bring its locomotives to MARC's Riverside Maintenance Facility, which is MARC's only back shop for locomotive servicing and maintenance. The connector will also allow MARC to store trainsets at a rail yard (Mt. Clare Yard) adjacent to the Penn-Camden Connector, eliminating the need to store trains overnight at Amtrak's Penn Station.

Total Project \$80,000,000 Cost

Status of PBCA Agreement: Not available

Cost Derivation Methodology: The Total Project Cost Estimate is a Rough-Order-of-Magnitude (ROM) cost used for planning purposes. A fully loaded cost estimate will be prepared as part of any NEPA/30% design efforts.

PBCA Notes: Not available

Funding sources for entire project history

Not available

| Project Schedule | | | | | | | | | |
|----------------------|---------------|---------------------|------|------|------|------|------|-----------------------|--|
| Phase | Cost Estimate | Schedule | FY21 | FY22 | FY23 | FY24 | FY25 | Notes | |
| NEPA | | Aug 2019 - Jul 2020 | | | | | | | |
| 30% and Final Design | | Sep 2019 - Dec 2021 | | | | | | Schedule assumes | |
| RoW Acquisition | | Aug 2019 - May 2021 | | | | | | funding is identified | |
| Construction | | Dec 2021 - Jul 2023 | | | | | | | |

Penn-Camden Connector

Coordinating Agency: Maryland DOT

In Partnership With: Amtrak

Type: Improvement Benefit: Shared

Funding Status: Unfunded

One Year Information

FY21 Budget: Not applicable

FY21 Scope: No activities planned for FY21

FY21 Milestones:

• Not applicable

Five Year Information

FY21-25 Funding Available: \$0

 At this funding level, the following phases could be initiated or completed in FY21-25: Not applicable

FY21-25 Additional Funding Needed: \$9,500,000

 With additional funding, the following phases could be initiated or completed in FY21-25 (given resource/ workforce constraints and track outages): 30% Design/NEPA, 65% Design, 85% Design, 100% (Final) Design, Procurement for Construction Services, Construction (potentially).

Attleboro Line Track 3 Extension: Transfer to Junction

Coordinating Agency: MBTA

In Partnership With: MassDOT, Amtrak

Type: Improvement Benefit: Shared

Funding Status: Fully funded

General Project Information

Full Project Scope This project is for the design of installing a third mainline track between Transfer Interlocking and Junction Interlocking. The project is expected to be completed in two phases. Phase 1 consists of extending Track 3 from Transfer I/L to Route 128 West (approx. 2.75 miles). Phase 2 consists of extending Track 3 from Route 128 West to

Junction I/L (approx. 1.25 miles).

Project Justification Not available

Justincation

Total Project \$60,677,108 Status of PBCA Agreement: Not started

Cost

Cost Derivation Methodology: Not available

PBCA Notes: Not applicable

Funding sources for entire project history MBTA Capital Funds \$60,677,108

| Project Schedule | | | | | | | | |
|-----------------------|---------------|---------------------|------|------|------|------|------|-------|
| Phase | Cost Estimate | Schedule | FY21 | FY22 | FY23 | FY24 | FY25 | Notes |
| Design and permitting | \$10,177,108 | Oct 2020 - Sep 2022 | | | | | | |
| Construction | \$50,000,000 | Oct 2022 - Sep 2025 | | | | | | |

Attleboro Line Track 3 Extension: Transfer to Junction

Coordinating Agency: MBTA

In Partnership With: MassDOT, Amtrak

Type: Improvement Benefit: Shared

Funding Status: Fully funded

One Year Information

FY21 Budget: \$5,000,000

FY21 Scope: Begin the design and permitting for phase one of the project.

FY21 Milestones:

Not applicable

Five Year Information

FY21-25 Funding Available: \$60,177,108

 At this funding level, the following phases could be initiated or completed in FY21-25: Complete entire project scope.

FY21-25 Additional Funding Needed: \$0

 With additional funding, the following phases could be initiated or completed in FY21-25 (given resource/ workforce constraints and track outages): Not applicable

Attleboro Line Track 3 OCS Installation

Coordinating Agency: MBTA

In Partnership With: MassDOT, Amtrak

Type: Improvement Benefit: Shared

Funding Status: Fully funded

General Project Information

Full Project Scope

This project is for the completion of the design and construction of a new Overhead Catenary System including the installation of all appurtenances and structural supports required for the electrification of track 3 between

Thatcher and Holden Interlockings.

Project Justification Not available

Total Project \$3,058,319

Status of PBCA Agreement: Not started

Cost

Cost Derivation Methodology: Not available

PBCA Notes: Not applicable

Funding sources for entire

project history

MBTA Capital Funds

\$3,058,319

| Project Schedule | | | | | | | | |
|-------------------------|---------------|---------------------|------|------|------|------|------|-------|
| Phase | Cost Estimate | Schedule | FY21 | FY22 | FY23 | FY24 | FY25 | Notes |
| Design and Construction | \$10.177.108 | Jun 2020 - Sep 2021 | | | | | | |

Attleboro Line Track 3 OCS Installation

Coordinating Agency: MBTA

In Partnership With: MassDOT, Amtrak

Type: Improvement Benefit: Shared

Funding Status: Fully funded

One Year Information

FY21 Budget: \$3,058,319

FY21 Scope: Complete the design and construction of a new Overhead Catenary System including the installation of all appurtenances and structural supports required for the electrification of track 3 between Thatcher and Holden Interlockings.

FY21 Milestones:

• Not applicable

Five Year Information

FY21-25 Funding Available: \$3,058,319

 At this funding level, the following phases could be initiated or completed in FY21-25: Complete entire project scope.

FY21-25 Additional Funding Needed: \$0

 With additional funding, the following phases could be initiated or completed in FY21-25 (given resource/ workforce constraints and track outages): Not applicable

Back Bay Station: Platform Ventilation

Coordinating Agency: MBTA

In Partnership With: Amtrak, MassDOT

Type: Improvement Benefit: Shared

Funding Status: Fully funded

General Project Information

Full Project Scope Back Bay Station serves passengers from four MBTA commuter rail lines and Amtrak's Regional, Acela, and Lake Shore Limited trains. The ventilation project will provide for the design and construction of an advanced ventilation system at the track and platform level. This will help remove diesel fumes from the tracks and platforms 1, 2 and 3. The air flows are currently being modeled and will render a preferred design solution.

Project Justification Environmental, safety, state of good repair.

Total Project

\$20,000,000 Status of PBCA Agreement: Not available

Cost Derivation Methodology: Based on a new conceptual estimate. 30% design will be reached in July 2020.

PBCA Notes: Not available

Funding sources

TIGER \$5,000,000 Recently applied for TIGER grant

Massachusetts \$16,000,000 Funds from original ductwork p

Funds from original ductwork project = \$12M Potentially available from original ductwork project

for entire project history

Private Source \$5,000,000 Private commercial contribution toward upgrades

| Project Schedule | | | | | | | | |
|---------------------|---------------|---------------------|------|------|------|------|------|-------|
| Phase | Cost Estimate | Schedule | FY21 | FY22 | FY23 | FY24 | FY25 | Notes |
| 30% Design | \$1,000,000 | Jun 2017 - Jul 2020 | | | | | | |
| Full Design and CPS | \$1,500,000 | Oct 2020 - Jul 2020 | | | | | | |
| Construction | \$20,000,000 | Oct 2021 - Oct 2022 | | | | | | |

Back Bay Station: Platform Ventilation

Coordinating Agency: MBTA

In Partnership With: Amtrak, MassDOT

Type: Improvement Benefit: Shared

Funding Status: Fully funded

One Year Information

FY21 Budget: \$26,000,000

FY21 Scope: 30% design will be achieved at beginning of FY21 Q1, and the MBTA will pout out a RFP/RFQ for new design services for final design and CPS.

FY21 Milestones:

- Re-procure FD and CPS (Oct 2020)
- Complete Design (Sep 2021)

Five Year Information

FY21-25 Funding Available: \$26,000,000

 At this funding level, the following phases could be initiated or completed in FY21-25: Not applicable

FY21-25 Additional Funding Needed: \$0

 With additional funding, the following phases could be initiated or completed in FY21-25 (given resource/ workforce constraints and track outages): Not applicable

Notes: Re-procure design services and commence FD effort

Boston South Station: Tower 1 Interlocking

Coordinating Agency: MBTA

In Partnership With: MassDOT, Amtrak

Type: Improvement Benefit: Shared

Funding Status: Partially funded

General Project Information

Full Project Scope

The complete redesign of Tower 1 Interlocking is part of the Boston South Station Expansion project. Tower 1 Interlocking is the railway "intersection" that provides operational flexibility for trains converging on South Station. It distributes each train to and from its platform track at the station. The goal of the Tower 1 Early Action project is to address current reliability and resiliency issues. Potential elements of the project may include: '- Replacing the existing signal system with a state-of-the-art microprocessor system; - Addressing settling that has occurred at switch points; - Providing conduits to allow easier access to wires and cables; - Evaluating the ability to raise the tracks to remove an existing dip caused by ground settlement; - Addressing ways to make Tower 1 more resilient to effects of climate change (flooding, extreme rain/snow events, heat stress, etc.); - Upgrading existing communications and providing redundancy; - Evaluating the ability to host longer trains by extending the platforms; - Raise all terminal track MAS to 15mph (Restoring track speed to 15 mph from 10 mph in the Boston Terminal would significantly improve OTP by reducing signal clearing time for all trains)"

Project Justification

Several issues now limit Tower 1's efficiency, such as physical constraints, more demands for service, and outdated equipment. MassDOT has prioritized redesigning Tower 1 as an improvement with immediate benefits for operating the current and future system.

Total Project \$82,367,690 Cost Cost Derivation

\$82,367,690 Status of PBCA Agreement: Not available

Cost Derivation Methodology: Not available

PBCA Notes: 100% signal design awarded, PI executed with Amtrak, FRA pre-award authorization executed

Funding sources

Federal State Partnership for SOGR \$41,183,845 FY17-18 Award for South Station Expansion - Tower 1 Early

Action Project

for entire project history

MBTA BCCs \$24,000,000 MassDOT/MBTA match for FY17-18 SOGR Award

Amtrak BCCs \$17,183,845 Amtrak match for FY17-18 SOGR Award

Project Schedule FY22 Notes Schedule FY21 FY23 FY24 FY25 Phase **Cost Estimate** \$12,508,170 Mar 2018 - Dec 2019 Includes CPS, agency Engineering oversight, final design, and owner's \$69,489,781 Jun 2021 - Jun 2025 Construction Includes contingency

Boston South Station: Tower 1 Interlocking

Coordinating Agency: MBTA

In Partnership With: MassDOT, Amtrak

Type: Improvement Benefit: Shared

Funding Status: Partially funded

One Year Information

FY21 Budget: \$11,050,000

FY21 Scope: Final design of all packages (special trackwork procurement, signal procurement, MBTA signal contractor package, Amtrak contractor trackwork package. Bid phase support for MBTA and Amtrak, Agency support, Begin purchase of long lead procurement items (1st special trackwork package, some signal equipment for Amtrak Lancaster shop)., CPS support for initial long lead procurement package (special trackwork submittal reviews)

FY21 Milestones:

• Signal design completed-100% (Nov 2020)

Five Year Information

FY21-25 Funding Available: \$71,310,000

 At this funding level, the following phases could be initiated or completed in FY21-25: Purchase of track material and signal material finalized in procurement packages, construction of Tower 1 trackwork (Amtrak) and signal (MBTA) packages, CPS support for all package, and agency support

FY21-25 Additional Funding Needed: \$0

 With additional funding, the following phases could be initiated or completed in FY21-25 (given resource/ workforce constraints and track outages): Not applicable

MBTA Pawtucket Layover Facility

Coordinating Agency: MBTA In Partnership With: RIDOT

Type: Improvement Benefit: Sole

Funding Status: Partially funded

General Project Information

Full Project Scope

This project will implement improvements to the existing Pawtucket Layover Facility, where the MBTA stores and services locomotive for the Providence/Stoughton Line. Enhancements will allow MBTA to perform fueling and light equipment maintenance in Pawtucket relieving pressure on other MBTA facilities. Phase 1, completed in 2013, included a 700 feet inspection pit. Under Phase 2, locomotive fluid handling equipment and storage tanks will be installed. This includes dispensing systems for diesel fuel, sand, and lube oil. Phase III is currently in design and will include a Train Inspection Shed that encapsulate all work in Phase I and Phase II. Phase III Construction is scheduled to be finished in 2022-2023.

Project Justification

MBTA Providence Line service extends into Wickford Junction Station, RI and in order for locomotives to receive light maintenance or fluid replenishment, they have to travel back into Massachusetts. Pawtucket Layover Facility lies on the border of Rhode Island and serves as a midday/overnight layover. With additional light maintenance capabilities provided by the Pawtucket Layover Improvements, locomotives will be stored and serviced to accommodate increasing ridership on the Northeastern Corridor and Providence Line.

Total Project \$37,000,000 Cost

Status of PBCA Agreement: In progress

Cost Derivation Methodology: All Phase Design:\$ 4,800,000 All Phase Construction: \$32,200,000 Costs above are inclusive of all direct and indirect cost associated across the three phases of Pawtucket Layover.

PBCA Notes: RIDOT will partially fund MBTA capital improvements in Rhode Island through Reimbursements.

Funding sources for entire project history

FTA Formula Grants

\$3,000,000

MBTA/RIDOT

\$34,000,000 MBTA partially funded/Reimbursed by RIDOT

| Project Schedule | | | | | | | | |
|-------------------------------|---------------|---------------------|------|------|------|------|------|-------|
| Phase | Cost Estimate | Schedule | FY21 | FY22 | FY23 | FY24 | FY25 | Notes |
| Design of Phase 1, 2, 3 | \$4,800,000 | Mar 2011 - Jan 2021 | | | | | | |
| Construction of Phase 1, 2, 3 | \$32,200,000 | Aug 2012 - Apr 2022 | | | | | | |

MBTA Pawtucket Layover Facility

Coordinating Agency: MBTA In Partnership With: RIDOT

Type: Improvement Benefit: Sole

Funding Status: Partially funded

One Year Information

FY21 Budget: \$7,000,000

FY21 Scope: Pawtucket Phase III Design will be completed within the FY21. The design includes the installation of a Train Inspection Shed encompassing three tracks of the layover. The Train Inspection Shed will incorporate Phase I Track Inspection Pit and Phase II Fluid Handling Equipment. The train inspection shed will allow for light to intermediate maintenance of locomotives serving the Providence Line.

FY21 Milestones:

- Phase III Final Design (May 2021)
- Phase III Construction NTP to be Issued (Sep 2021)

Five Year Information

FY21-25 Funding Available: \$7,000,000

 At this funding level, the following phases could be initiated or completed in FY21-25:
 Pawtucket Phase III Design is expected to be completed in FY 21. Pawtucket Phase III Construction is expected to be completed in FY 23

FY21-25 Additional Funding Needed: \$20,000,000

 With additional funding, the following phases could be initiated or completed in FY21-25 (given resource/ workforce constraints and track outages): Pawtucket Phase III Construction could be completed with the additional funding.

Coordinating Agency: MBTA
In Partnership With: MassDOT

Type: Improvement Be

Funding Status: Fully funded

Benefit: Sole

General Project Information

Full Project Scope

This project will construct a new platform and make other improvements at Ruggles Station to enable all inbound and outbound MBTA trains to serve the station and to increase system capacity along this segment of the NEC. The project will improve accessibility by upgrading the existing elevators and adding one new elevator in the lower busway, and make interior and exterior repairs to bring the station to code. A TIGER grant partially funds this project, which is part of a larger initiative to modernize the Ruggles Station which requires additional funding for full construction.

Project Justification

Today, more than 30 percent of inbound trains bypass Ruggles Station, requiring more than 500 inbound passengers to transfer from MBTA Commuter Rail to the MBTA Orange Line at Back Bay then backtracking to Ruggles, commonly known as the "Back Bay Detour." The new platform will provide service improvements for the MBTA Commuter Rail passengers and add operational flexibility for MBTA Commuter Rail and Amtrak. With full service to Ruggles Station, Commuter Rail ridership to the area surrounding the station will grow as station area employment and Boston region population grows.

Total Project \$38,996,774
Cost Cost Derivation

\$38,996,774 Status of PBCA Agreement: Not available

Cost Derivation Methodology: Based on final design, construction is currently ~71% complete

PBCA Notes: Not available

Funding sources for entire

project history TIGER \$20,000,000 TIGER Grant

Other Federal Discretionary \$18,998,774 Grants 540016 & 790002

Massachusetts \$398,000 State/Bond fund R20A06

| Project Schedule | | | | | | | | | |
|------------------|---------------|---------------------|------|------|------|------|------|---|--|
| Phase | Cost Estimate | Schedule | FY21 | FY22 | FY23 | FY24 | FY25 | Notes | |
| Final Design | | Mar 2012 - Jan 2017 | | | | | | | |
| Construction | \$19,667,000 | Jun 2017 - Jan 2020 | | | | | | | |
| Other | \$19,729,774 | | | | | | | Internal and external force accounts, field inspection, project administration, real estate, construction phase services, project contingency | |

Coordinating Agency: MBTA
In Partnership With: MassDOT

Type: Improvement Benefit: Sole

Funding Status: Fully funded

One Year Information

FY21 Budget: \$12,500,000

FY21 Scope: Substantial completion of construction anticipated in November 2020, with final completion in December 2021 and closeout complete in Summer 2021.

FY21 Milestones:

- Substantial Completion (Nov 2020)
- Final Completion (Dec 2020)
- Closeout Complete (Jun 2021)

Five Year Information

FY21-25 Funding Available: \$12,500,000

 At this funding level, the following phases could be initiated or completed in FY21-25:
 Substantial completion of construction anticipated in November 2020, with final completion in December 2021 and closeout complete in Summer 2021.

FY21-25 Additional Funding Needed: \$0

 With additional funding, the following phases could be initiated or completed in FY21-25 (given resource/ workforce constraints and track outages): Not applicable

Coordinating Agency: MBTA
In Partnership With: MassDOT

Type: Improvement Benefit: Sole

Funding Status: Partially funded

General Project Information

Full Project Scope

Project scope is still being determined, but is anticipated to include reconstruction of the existing center island Commuter Rail platform, construction of a new elevator serving the Orange Line , reconstruction of an existing staircase serving the Orange Line Platform, and interior improvements including installation of accessible bathrooms, handrails, stairs, signage, platform seating, visual displays, entrances, pull stations and sound systems. A November 2019 SGR report and March 2019 Sprinkler System Evaluation identify numerous items anticipated to be addressed in this Project. It is planned to replace Amtrak's existing electronic signage (train approach messaging system, or TAMS), on the center island commuter rail platform, and it would be beneficial and economical to incorporate this work within the Phase 2 reconstruction of the platform.

Project Justification

The MBTA applied for and received a variance from the Massachusetts Architectural Access Board (MAAB) to perform Phase 1 Improvements. This Phase 1 work is currently ongoing and includes construction of a new commuter rail platform, adding a new elevator, and reconstructing 4 existing elevators. To meet its obligation under the MAAB variance, the MBTA needs to make accessibility improvements as described above as part of the Phase 2 project. The project will also address State-of-Good-Repair and bring the station to compliance with the new building codes. The 1987 structure has never been upgraded and this work will not only upgrade the station but also ensure its reliability and structural integrity for the next 20 plus years .

Total Project Cost

\$26,500,000

Status of PBCA Agreement: Not available

Cost Derivation Methodology: Based on initial conceptual design. It is a rough-order-of-magnitude estimate based on an internal cost estimate.

PBCA Notes: Not available

Funding sources for entire project history Massachusetts

\$3,248,754 State/Bond funds

| Project Schedule | | | | | | | | |
|-------------------------------|---------------|---------------------|------|------|------|------|------|---|
| Phase | Cost Estimate | Schedule | FY21 | FY22 | FY23 | FY24 | FY25 | Notes |
| Feasibility/Conceptual Design | \$200,000 | Jun 2020 - Dec 2020 | | | | | | |
| Final Design | \$2,436,468 | Dec 2020 - Sep 2021 | | | | | | |
| Construction | \$20,000,000 | Dec 2021 - Jun 2023 | | | | | | |
| Other | \$3,810,526 | | | | | | | Internal and external force accounts, field inspection, project administration, project contingency |

Coordinating Agency: MBTA
In Partnership With: MassDOT

Type: Improvement Benefit: Sole

Funding Status: Partially funded

One Year Information

FY21 Budget: \$3,000,000

FY21 Scope: Progress to and complete 100 % design

FY21 Milestones:

• Complete 15% design (Dec 2020)

• Complete 100% design (Sep 2021)

Five Year Information

FY21-25 Funding Available: \$3,248,754

 At this funding level, the following phases could be initiated or completed in FY21-25: Bid Phase Services

FY21-25 Additional Funding Needed: \$23,000,000

 With additional funding, the following phases could be initiated or completed in FY21-25 (given resource/ workforce constraints and track outages):
 Construction of Ruggles Phase 2 Improvements

South Attleboro Station Accessibility Improvements

Coordinating Agency: MBTA In Partnership With: MassDOT, GATRA, RIPTA, City of

Attleboro

Type: Improvement Benefit: Sole

Funding Status: Fully funded

General Project Information

Full Project Scope

The scope of work for the South Attleboro Accessibility Improvements Project includes, new pedestrian walkway bridge with access to inbound and outbound platforms, installation of three bus bays, new accessible parking

improvements, new pedestrian crossings, and new high level platforms.

Project Justification

Due to community complaints on the State of Repair of South Attleboro Station, a full renovation project will be undertaken to provide accessibility improvements, to modernize the entire station, and to provide multimodal

transfer capabilities.

Total Project \$48,661,718 Cost

Status of PBCA Agreement: In progress

Cost Derivation Methodology: Design Cost: \$5,000,000 Construction Cost: \$40,000,000 Contingency: 10%

PBCA Notes: Not available

Funding sources for entire project history

FTA Section 5337 Funds \$48,661,718

| Project Schedule | | | | | | | | |
|---------------------------|---------------|---------------------|------|------|------|------|------|-------|
| Phase | Cost Estimate | Schedule | FY21 | FY22 | FY23 | FY24 | FY25 | Notes |
| Design and Administration | \$4,475,819 | Mar 2020 - Jun 2021 | | | | | | |
| Construction | \$44,185,899 | Sep 2021 - Dec 2022 | | | | | | |

South Attleboro Station Accessibility Improvements

Coordinating Agency: MBTA

In Partnership With: MassDOT, GATRA, RIPTA, City of

Attleboro

Type: Improvement Benefit: Sole

Funding Status: Fully funded

One Year Information

FY21 Budget: \$45,100,000

FY21 Scope: South Attleboro Accessibility Improvements Project Final Design will be completed in FY 2021. South Attleboro Accessibility Improvements Project Construction NTP will be issued in FY 2021.

FY21 Milestones:

- Final Design Completion (Jun 2021)
- NTP for Construction (Sep 2021)

Five Year Information

FY21-25 Funding Available: \$48,661,718

 At this funding level, the following phases could be initiated or completed in FY21-25:
 South Attleboro Final Design is expected to be completed in FY21. South Attleboro Construction is expected to be completed in FY23.

FY21-25 Additional Funding Needed: \$0

 With additional funding, the following phases could be initiated or completed in FY21-25 (given resource/ workforce constraints and track outages): Not applicable

East River Tunnel: Right of Way Infrastructure Improvements

Coordinating Agency: MTA In Partnership With: Amtrak

Type: Improvement Funding Status: Fully funded Benefit: Shared

General Project Information

Full Project Scope

This project includes several initiatives in the East River Tunnels, including: Stray Current Study; Communications antenna replacement in lines 3 and 4; Total track replacement in line 4; and 1st Avenue substation replacement. Work would evaluate and mitigate stray current in the tubes, improve radio system infrastructure in the tunnels and on the platforms at Penn Station New York used by Amtrak and LIRR, renew track and track-bed infrastructure in East River Tunnels 3 & 4, and install a new fully operational AC-DC traction power substation to replace a substation that was damaged by Hurricane Sandy. These projects would improve reliability and reduce delays and maintenance costs by replacing and/or upgrading existing equipment. Some funding for these improvements is available. Additional funding is required for other improvements.

Project Justification

Track and antenna replacement are state-of-good-repair projects to resolve existing and identified deficiencies. The Stray Current Study will identify source of stray current causing base corroded rail and will identify means to contain it. The new substation will replace a traction power substation damaged during Hurricane Sandy.

Total Project \$88,500,000 Cost

Status of PBCA Agreement: Not applicable

Cost Derivation Methodology: The cost estimates were derived by a combination of internal LIRR cost estimators and 3rd party consultant estimators, based on either 30% designs or 100% designs created between 2012-15.

PBCA Notes: For the sub Station project, as this is a DC Sub Station LIRR funds the improvement 100%.

Funding sources for entire project history

MTA Capital Funds

\$88,500,000

| Project Schedule | | | | | | | | |
|------------------|---------------|---------------------|------|------|------|------|------|-------|
| Phase | Cost Estimate | Schedule | FY21 | FY22 | FY23 | FY24 | FY25 | Notes |
| Final Design | \$3,000,000 | Jan 2012 - Jun 2015 | | | | | | |
| Construction | \$85,500,000 | Jan 2017 - Dec 2022 | | | | | | |

East River Tunnel: Right of Way Infrastructure Improvements

Coordinating Agency: MTA In Partnership With: Amtrak

Type: Improvement Benefit: Shared

Funding Status: Fully funded

One Year Information

FY21 Budget: \$3,000,000

FY21 Scope: Continue antenna replacement in ERT's 3&4 and platforms. Continue ERT Line 4 Total Track Replacement.

FY21 Milestones:

- Complete ERT Line 4 Track Rehab (Feb 2021)
 - Subject to availability of Amtrak force account and track outages in the ERT
- Complete Tunnel Antenna Project (Mar 2021)
 - Subject to availability of Amtrak force account and track outages in the ERT

Five Year Information

FY21-25 Funding Available: \$3,000,000

 At this funding level, the following phases could be initiated or completed in FY21-25:
 Complete ERT Tunnel and platform replacement, and ERT Line 4 Total Track Rehab in 2021

FY21-25 Additional Funding Needed: \$0

 With additional funding, the following phases could be initiated or completed in FY21-25 (given resource/ workforce constraints and track outages): Not applicable

Gateway: Penn Station Expansion

Coordinating Agency: MTA In Partnership With: Amtrak, NJ Transit

Benefit: Shared Type: Improvement

Funding Status: Partially funded

General Project Information

Full Project Scope

This project would expand Penn Station NY to add new tracks, platforms, and concourse space to facilitate a growth in rail service in coordination with other Gateway Program investments to expand capacity. The project

may also include expansion of existing platforms 1 and 2 to allow longer trains to use the platforms.

Project Justification Penn Station New York is a pinch point at the center of the NEC, with 21 tracks accommodating some 1,300 average weekday train movements. The expansion of Penn Station tracks, platforms, and concourses is necessary

to address growth in trans-Hudson demand and rail service that will be accommodated by additional elements of

the Gateway Program.

Cost

Total Project Total Project Cost TBD

Status of PBCA Agreement: Not available

Cost Derivation Methodology: Project in early stages of development; cost information not yet available.

PBCA Notes: Not available

Funding sources for entire project

history

Amtrak FY21 FRA Grant

\$14,050,000 (with additional funds to be identified)

MTA

\$5,500,000 (with additional funds to be identified)

NJ Transit

TBD

| Project Schedule | | | | | | | | | |
|----------------------------------|---------------|---------------------|------|------|------|------|------|-------|--|
| Phase | Cost Estimate | Schedule | FY21 | FY22 | FY23 | FY24 | FY25 | Notes | |
| Feasibility/Conceptual Design | \$2,807,009 | Jul 2019 – Dec 2020 | | | | | | | |
| PE/NEPA | TBD | Jan 2021 – Sep 2022 | | | | | | | |
| Property Acquisition/Relocations | TBD | Oct 2022 – Sep 2023 | | | | | | | |
| Demolition | TBD | Sep 2023 – Jun 2024 | | | | | | | |
| Design/Build Contract | TBD | Mar 2023 – Dec 2028 | | | | | | | |

Gateway: Penn Station Expansion

Coordinating Agency: MTA In Partnership With: Amtrak, NJ Transit

Benefit: Shared Type: Improvement

Funding Status: Partially funded

One Year Information

FY21 Budget: TBD

FY21 Scope: Initiation of Penn Station Expansion **Environmental Impact Statement and Preliminary** Engineering.

FY21 Milestones:

- Environmental Consultant NTP (Sep 2020)
- Engineering Consultant NTP (Nov 2020)
- Data gap Analysis & Scoping (Q1 CY2021)

Five Year Information

FY21-25 Funding Available: \$19,550,000

- Amtrak: FY21 FRA Grant: \$14,050,000 with additional funds to be identified
- MTA: \$5,500,000 with additional funds to be identified
- NJT: TBD
- At this funding level, the following phases could be initiated or completed in FY21-25: Initiation of Preliminary Engineering and NEPA.

FY21-25 Additional Funding Needed: TBD

With additional funding, the following phases could be initiated or completed in FY21-25 (given resource/ workforce constraints and track outages): Completion of preliminary engineering, start of construction.

Harold Interlocking

Coordinating Agency: MTA In Partnership With: Amtrak

Type: Improvement

Funding Status: Fully funded

Benefit: Shared

General Project Information

Full Project Scope This project will construct new conflict-free train routes through Harold Interlocking, the busiest switch point on the NEC. Located in Queens, NY, this interlocking sorts Amtrak, LIRR, and NJ TRANSIT trains as they travel north

and east of Penn Station or access Sunnyside Yard for service and storage.

Project Justification The project, which utilized HSIPR funds, will greatly improve reliability, on-time performance, and travel time for

all rail services operating through the Harold Interlocking.

Total Project Cost

Total Project \$1,404,295,860 Status of PBCA Agreement: Not available

Cost Derivation Methodology: New estimate created to incorporate impacts of Amtrak's lack of resources and reduced productivity, which extended the project schedule to 2027. Current schedule coordinates implementation of project elements with other Regional and Amtrak projects. Designs for remaining project elements are at or near 100%, however, contracts for remaining work will be advanced as design build contracts. Project cost estimate was updated May 2019.

PBCA Notes: Not available

Funding sources for entire project

history

ARRA/HSIPR \$294,781,579 All grant funds disbursed to reimburse project costs through

2017.

Local funding \$1,109,514,281 Local match

| Project Schedule | | | | | | | | |
|------------------|-----------------|---------------------|------|------|------|------|------|-------|
| Phase | Cost Estimate | Schedule | FY21 | FY22 | FY23 | FY24 | FY25 | Notes |
| Construction | \$1,404,295,860 | Jul 2015 - Dec 2027 | | | | | | |

Harold Interlocking

Coordinating Agency: MTA In Partnership With: Amtrak

Type: Improvement Benefit: Shared

Funding Status: Fully funded

One Year Information

FY21 Budget: \$100,000,000

FY21 Scope: Award and commence construction under a third party contract (CH063) to undertake project related catenary and trackwork: October 2020. Award and commence construction of the Eastbound Reroute contract (CH058B).

FY21 Milestones:

- Award and NTP for Catenary Contract (CH063) (Oct 2020)
- Award and NTP for EBRR East Approach work under CH058B (Dec 2020)

Five Year Information

FY21-25 Funding Available: \$798,478,633

 At this funding level, the following phases could be initiated or completed in FY21-25: MTA C&D expects to complete the Eastbound Reroute and Westbound Bypass by mid-2025. Per the current schedule, construction of the Amtrak Car Washer and related track work would begin in late 2025 (FFY 2026).

FY21-25 Additional Funding Needed: Not available

 With additional funding, the following phases could be initiated or completed in FY21-25 (given resource/ workforce constraints and track outages):
 It is expected that funding needed after December 2024 will be included in the MTA's 2025-2029 Capital Program.

Notes: Achievement of milestones may be affected by impacts of Covid-19 restrictions.

Notes: The MTA's approved 2020-2024 Capital Program provides project funding for activities initiated through December 2024.

Penn Station Access

Coordinating Agency: MTA In Partnership With: Amtrak

Type: Improvement Funding Status: Fully funded Benefit: Shared

General Project Information

Full Project Scope

This project will open a new Metro-North Railroad link directly into Penn Station New York from the New Haven Line in Westchester and the State of Connecticut. Four new Metro-North stations will be built in the Bronx – near Co-op City, Morris Park, Parkchester/Van Nest, and Hunts Point. The project also includes upgrading the power and signal systems along the Hell Gate Line; adding new interlockings and tracks, and modifying existing ones and curves on a portion of the line; modifying existing over-the-street railroad bridges such as Eastchester Road Bridge, Bronxdale Avenue Bridge, and Pelham Lane Bridge, as necessary; and reinforcing the Bronx River Bridge. Early action items could include the replacement of antiquated power assets (including but not limited to catenary assets). This work will bring existing Amtrak assets to a state of good repair, as well as support the introduction of Metro-North New Haven Line commuter rail service to Penn Station New York.

Project Justification

Penn Station Access will add resiliency and redundancy to the existing Metro-North New Haven Line service to Manhattan, providing greater mobility, access, connectivity, and travel times savings for existing and new Metro-North customers and helping to address Grand Central Terminal (GCT) capacity issues. The project will substantially reduce travel times between Manhattan's West Side and areas within Metro-North's East-of-Hudson service territory; provide a new one-seat ride from NHL communities to jobs, shopping and other destinations on Manhattan's West Side; and improve regional connectivity and mobility by completing direct connections at Penn Station among all of the New York area's regional and intercity rail carriers—Metro-North, LIRR, New Jersey Transit, and Amtrak. Furthermore, the four new stations will increase access from East Bronx communities to employers on Manhattan's West Side and along I-95 in Westchester and the State of Connecticut and access to East Bronx employers from the same areas. The benefits above will be cost-effective by largely using existing infrastructure.

Total Project \$1,583,141,445 Cost

Status of PBCA Agreement: In progress

Cost Derivation Methodology: Approved Project Budget was based on the phase of Conceptual Engineering and created in February 2019.

PBCA Notes: Not available

Funding sources for entire project history

Federal State Partnership for SOGR

\$30,000,000 FY19 Award for Penn Station Access - Hell Gate Line Catenary

\$1,553,141,445 Includes MTA match for FY19 SOGR Award MTA

TBD Other Amtrak Sources

| Project Schedule | | | | | | | | | |
|------------------|-----------------|----------------------|-----|----|------|------|------|------|-------|
| Phase | Cost Estimate | Schedule | FY2 | 21 | FY22 | FY23 | FY24 | FY25 | Notes |
| PE/NEPA | \$32,236,716 | CY Q1 2019 - Q4 2020 | | | | | | | |
| Final Design | \$60,000,000 | CY Q1 2021 - Q2 2022 | | | | | | | |
| Construction | \$1,153,905,516 | CY Q2 2021 - Q2 2025 | | | | | | | |

Penn Station Access

Coordinating Agency: MTA In Partnership With: Amtrak

Type: Improvement Benefit: Shared

Funding Status: Fully funded

One Year Information

FY21 Budget*: \$1,213,905,516

FY21 Scope: MTA plans to complete PE/NEPA in FY2021, in order to procure a design/build contract by the end of FY 2021 for the completion of PSA.

FY21 Milestones:

- PE/NEPA Complete (Sep 2020)
- Execute Design-Build Agreement (Sep 2020)
- Execute Workforce Agreement (Sep 2020)
- Execute Cost Sharing Agreement (Nov 2020)
- Execute Real Estate Agreement (Nov 2020)
- Award Design-Build (Dec 2020)
- Initiate Final Design (Dec 2020)
- Initiate Construction (Mar 2021)

Five Year Information

FY21-25 Funding Available: \$1,583,141,445

 At this funding level, the following phases could be initiated or completed in FY21-25: Complete design & construction.

FY21-25 Additional Funding Needed: TBD

 With additional funding, the following phases could be initiated or completed in FY21-25 (given resource/ workforce constraints and track outages): Not available

Notes: \$1,213,905,516 is available for this project in FY21. For consistency, this available funding is not included in FY21 planned expenditure totals throughout this plan.

Penn Station New York: Reconstruction Master Plan

Coordinating Agency: MTA

In Partnership With: Amtrak, NJ TRANSIT

Type: Improvement Benefit: Shared

Funding Status: Partially funded

General Project Information

Full Project Scope

This project will undertake a major reconstruction of Penn Station to relieve overcrowding, improve passenger flow, safety and security, rationalize station configuration and operation, increase revenue generation, improve the general passenger experience, unify the existing Penn Station with the Moynihan Train Hall and a future expansion of the station, and address deficiencies of building systems, platform and building egress, vertical circulation, lighting, finishes and amenities.

The first element of this program is MTA's East End Gateway and LIRR Concourse project, currently in construction, which will add a major new entrance at 33rd Street and 7th Avenue and widen and improve the LIRR 33rd Street Concourse along with associated building systems, lighting, finishes and LIRR station operation facilities. The next element, the Penn Station Reconstruction Master Plan, will extend the reconstruction begun by MTA under the East End Gateway and LIRR Concourse project to encompass the entire station, jointly with Amtrak and NJ TRANSIT.

The project includes state of good repair work on Platforms 7 and 8 and may include expansion of existing platforms 1 and 2 to allow longer trains to use the platforms.

Project Justification

Penn Station is currently serving three times the number of users it served in the 1960s when it was converted from a world-class station in a grand neo-classical building widely regarded as a civic treasure into two unimaginative basement levels under an office building and Madison Square Garden. Despite at improvements over the years, it is outdated and poorly configured, portions of it are highly congested, its finishes are worn, space planning is constrained by a forest of legacy and new structural members and many building systems are nearing the end of their useful lives. The station is badly in need of major investment to maintain and expand operations, renew its infrastructure, improve its revenue stream to support itself and re-establish itself as the premier rail transportation center in the New York Metropolitan region.

Total Project Cost

Total Project Cost TBD

Status of PBCA Agreement: In progress

Cost Derivation Methodology: The cost estimates for some elements were derived by a combination of internal MTA cost estimators and 3rd party consultant estimators, based on either 30% designs created between 2015 and 2020.

PBCA Notes: Tracks 17 – 21 are funded 100% by MTA, Tracks 13 – 16 are funded approximately 65% by MTA, and Tracks 1 – 12 are funded 0% by MTA based on usage.

Funding sources for entire project history Federal State Partnership for SOGR

\$17,506,577 FY19 Award for Penn Station Platform Improvements

MTA \$

\$608,463,577 Includes \$14,463,577 match for FY19 SOGR Award

Other Amtrak Sources

\$3,043,000 Match for FY19 SOGR Award

Project Schedule

| Phase | Cost Estimate | Schedule | FY21 | FY22 | FY23 | FY24 | FY25 | Notes |
|---|---------------|---------------------|------|------|------|------|------|-------|
| East End Gateway and LIRR Concourse Construction | TBD | Jun 2019 - Dec 2022 | | | | | | |
| Penn Station Master Plan Reconstruction | TBD | Aug 2023 - Aug 2028 | | | | | | |

Penn Station New York: Reconstruction Master Plan

Coordinating Agency: MTA

In Partnership With: Amtrak, NJ TRANSIT

Type: Improvement Benefit: Shared

Funding Status: Partially funded

One Year Information

FY21 Budget: TBD

FY21 Scope: Complete Construction of the new LIRR Entrance at 33rd Street.

FY21 Milestones:

- Start 33rd St Corridor Construction (Nov 2020)
 - Requires Amtrak executed "Permit to Enter"
 - Subject to Amtrak force account availability and provision of track outages
- Complete Construction of New Entrance (Dec 2020)

Five Year Information

FY21-25 Funding Available: TBD

 At this funding level, the following phases could be initiated or completed in FY21-25:
 Complete the LIRR Entrance at 33rd Street and reconstruction of the LIRR Concourse; complete the Master Plan study

FY21-25 Additional Funding Needed: TBD

 With additional funding, the following phases could be initiated or completed in FY21-25 (given resource/ workforce constraints and track outages): Environmental determination, 30% design, procurement and initiation and progression of the Penn Station Master Plan Reconstruction.

River-to-River Rail Resiliency Projects (R4)

Coordinating Agency: MTA In Partnership With: Amtrak

Type: Improvement
Funding Status: Fully funded

Benefit: Shared

General Project Information

Full Project Scope

This program will protect the East River Tunnels and the West Side Yard against flood hazards to ensure connectivity at New York Penn Station for Amtrak, LIRR, and NJ TRANSIT. The program consists of multiple elements, including West Side Yard perimeter protection and drainage improvements, hardening the Queens Portals of the East River Tunnels, resiliency improvements within the East River Tunnels, including the installation of permanent emergency generators, and waterproofing of the entrances and manhole/conduit points of entry to two ventilation facilities.

Note: Amtrak's portion of this project, which is funded by the FRA, can be found in Amtrak's capital renewal plan.

Project Justification This project will enhance weather resiliency.

Total Project Cost \$108,100,000

Status of PBCA Agreement: Completed

Cost Derivation Methodology: The cost estimates were derived by a 3rd party consultant estimator, based on a conceptual design in Oct 2013.

PBCA Notes: Improvements in East River Tunnels are funded 100% for Lines 3 and 4 and approximately 25% for Lines 1 and 2 based on overall usage by carrier.

Funding sources for entire project history

FTA Superstorm Sandy Grant \$80,036,167

\$80,036,167 FTA Sandy Grant for West Side Yard; FTA Sandy Grant for LIC Queens Portals; FTA Sandy Grant for ERT System Protection. Note: \$13,478,978 was flexed from the FTA to the FRA on

4/26/18.

MTA/Amtrak \$28,000,000

\$28,000,000 For West Side Yard. MTA expects the 25% match will be shared by MTA & Amtrak = \$10.6M For LIC Queens Portals.

MTA expects the 25% match will be shared by MTA & Amtrak.

= \$5.4M For ERT System Protection. MTA expects the 25%

match will be shared by MTA & Amtrak. = \$6.4 M

| Project Schedule | | | | | | | | |
|-------------------------------|---------------|---------------------|------|------|------|------|------|--|
| Phase | Cost Estimate | Schedule | FY21 | FY22 | FY23 | FY24 | FY25 | Notes |
| Feasibility/Conceptual Design | \$2,500,000 | Sep 2016 - Dec 2020 | | | | | | Conceptual Design period extended to include soil survey, profile and composition analysis |
| Construction | \$105,500,000 | Dec 2020 - Jun 2023 | | | | | | |

River-to-River Rail Resiliency Projects (R4)

Coordinating Agency: MTA In Partnership With: Amtrak

Type: Improvement Benefit: Shared

Funding Status: Fully funded

One Year Information

FY21 Budget: \$25,000,000

FY21 Scope: Construction start of the WSY and Queens North & South flood perimeter walls. Procurement of a Design-Builder for the Queens ERT Portals flood protection.

FY21 Milestones:

Not applicable

Five Year Information

FY21-25 Funding Available: \$108,100,000

 At this funding level, the following phases could be initiated or completed in FY21-25: Procure the Design-builder for the Queens Portal Flood mitigation and complete the work. Complete the WSY Flood Wall. Complete the Queens North & South perimeter flood walls.

FY21-25 Additional Funding Needed: \$0

 With additional funding, the following phases could be initiated or completed in FY21-25 (given resource/ workforce constraints and track outages): Not applicable

Gateway: Portal North Bridge

Coordinating Agency: NJ TRANSIT

In Partnership With: Amtrak, Port Authority of NY & NJ, Gateway Program Development Corporation, NJ Economic

Development Authority

Type: Major Backlog Benefit: Shared

Funding Status: Partially funded

General Project Information

Full Project Scope

This project would replace the century-old swing-span Portal Bridge over the Hackensack River with a new twotrack, fixed-span bridge, allowing a modest expansion of capacity. Amtrak and NJ TRANSIT have completed final design and environmental review. The project was accepted by the FTA into the "Engineering Phase" of its Capital Investment Grant - Core Capacity grant program in June 2020. Once complete, the new bridge will save upwards of \$1.3 million annually in reduced maintenance and operating costs due to the replacement of a swing bridge with a fixed bridge.

Project Justification

The existing Portal Bridge is a major bottleneck and source of delay of train traffic. It has limited vertical clearance and must routinely be opened for maritime traffic. The bridge is functionally obsolete and experiences frequent mechanical failures, resulting in a single point-of-failure on the NEC and substantial delays. The risk of continued and increasing unplanned outages due to malfunctioning of the obsolete bridge cannot be mitigated by maintenance.

Total Project \$1,803,000,000 Cost

Status of PBCA Agreement: In progress

Cost Derivation Methodology: The estimated cost of the Portal North Bridge (PNB) Project at \$1.803 billion is consistent with the September 2019 CIG submission to FTA. This higher cost incorporates new mandates such as 5% escalation per year, and using a "P65" probability of cost factor. The Project is at a 100% level of design completion as the design phase was generally completed in 2013, with certain updates, revisions and clarifications being incorporated over the past few years.

PBCA Notes: Not available

Funding sources for entire project history

| CIG | \$766,500,000 | FTA Core Capacity |
|-----|---------------|-------------------|

CMAQ CMAQ funding and FHWA Congestion Mitigation for \$57,063,562

Construction Phase 2

\$55,100,000 FY19 Award for Portal North Bridge Project Federal State Partnership for SOGR

NJ Economic Development Authority \$553,722,000

Bonds

NJ Turnpike Authority \$165,172,000

NJ Transportation Trust Fund \$26,116,566

NJ TRANSIT Match for CMAQ Funds \$14,265,890

Amtrak Escrow Account Contribution \$64,506,000

Match for FY19 SOGR Award **Amtrak Revenues** \$55,100,000

Amtrak Gateway Program Reserves \$45,869,000

Project Schedule Phase **Cost Estimate** Schedule FY21 FY22 FY23 FY24 FY25 Notes Construction - Phase 2 - Contract GC.02 \$1,803,000,000 Jul 2021 - Dec 2026 Per 2020 Financial

Gateway: Portal North Bridge

Coordinating Agency: NJ TRANSIT In Partnership With: Amtrak, Port Authority of NY & NJ, Gateway Program Development Corporation, NJ Economic

Development Authority

Type: Major Backlog Benefit: Shared

Funding Status: Partially funded

One Year Information

FY21 Budget: \$66,701,000

FY21 Scope: The Procurement Phase to secure the services of a Construction Contractor is slated to begin in October 2020. This phase will be supplemented with a Contractor/ DBE Outreach Event scheduled for January 2021. Bid opening is tentatively scheduled for March/April 2021, and that event would be followed by the issuance of Notice to Proceed to the winning bidder within Q4 FY21. Financially, the project's next Financial Plan is anticipated to be submitted to the FTA by the end of September 2020 and the execution of an FFGA with the FTA is contemplated to occur within the 1st or 2nd Quarters of FY21.

FY21 Milestones:

- Contractor / DBE Outreach Event (Jan 2021)
- Execution of FFGA (FY21 TBD)
- Contract Award (May 2021)
- NTP Issued (Jul 2021)

Five Year Information

FY21-25 Funding Available: \$1,803,000,000^A

At this funding level, the following phases could be initiated or completed in FY21-25: The Construction Phase, with an estimated 5.5 year duration, will be well underway during this FY period.

FY21-25 Additional Funding Needed: \$0

With additional funding, the following phases could be initiated or completed in FY21-25 (given resource/ workforce constraints and track outages): Not applicable

Notes: AFY21-25 Funding Available figure includes existing federal, local, and Amtrak funding sources in addition to the \$766.5M requested from the FTA's CIG program and is expected over the next 5 years per a pending full funding grant agreement (FFGA).

Delco Lead

Coordinating Agency: NJ TRANSIT

In Partnership With: Amtrak

Type: Improvement Benefit: Sole

Funding Status: Fully funded

General Project Information

Full Project Scope

This project will construct a safe haven storage facility on the NEC south of the New Brunswick station to protect rail rolling stock against damage resulting from a storm surge. A service and inspection facility that is part of the project will facilitate the rapid return of equipment to service following a storm event. This project is supported by FTA Emergency Relief Program funds. Phase I of the Delco Lead Project is the County Yard project which will expand the existing County Storage Yard from its current footprint to include an unused part of an adjacent rail freight yard. The Delco Lead project, with County Yard improvements, will provide safe storage capacity for up to 444 rail cars in the event of flooding at other locations.

Project Justification

The project will provide resilient storage for rail cars and service and inspection (S&I) capabilities to facilitate the rapid return to service of stored rolling stock equipment following an extreme weather event. The S&I Facility will be utilized for daily inspections and required equipment service at County Yard. Furthermore, the Delco Lead tracks would potentially be used in the future in conjunction with the proposed Mid-Line Loop and North Brunswick Station projects.

Total Project \$245,992,000 Cost Cost Derivation

\$245,992,000 Status of PBCA Agreement: Not applicable

Cost Derivation Methodology: The project is currently at a 60% level of design completion, but will soon be at 90%. The estimate was prepared by the Engineer-of-Record, Jacobs Engineering Group, during its preparation of the design plans in 2016.

PBCA Notes: Not applicable

Funding sources for entire project history FTA Formula Grants \$184,493,910 Multiple FTA Grants (7)

NJ Transportation Trust Fund \$63,551,000

| Project Schedule | | | | | | | | |
|------------------|---------------|---------------------|------|------|------|------|------|-------|
| Phase | Cost Estimate | Schedule | FY21 | FY22 | FY23 | FY24 | FY25 | Notes |
| PE/NEPA | \$1,500,000 | Oct 2014 - Feb 2016 | | | | | | |
| Final Design | \$16,568,000 | Mar 2016 - Sep 2020 | | | | | | |
| Construction | \$267,284,910 | Sep 2021 - May 2026 | | | | | | |

Delco Lead

Coordinating Agency: NJ TRANSIT In Partnership With: Amtrak

Type: Improvement Benefit: Sole

Funding Status: Fully funded

One Year Information

FY21 Budget: \$8,000,000

FY21 Scope: The Construction Contract is to be advertised in January 2021. The contract is expected to be awarded by NJ TRANSIT's Board of Directors in July 2021 and, Notice to Proceed is scheduled to be issued to the winning bidder in September 2021.

FY21 Milestones:

- Procurement (Jan 2021)
- Contract Award (Jul 2021)
- Notice to Proceed (Sep 2021)

Five Year Information

FY21-25 Funding Available: \$224,849,000

 At this funding level, the following phases could be initiated or completed in FY21-25:
 The Construction Phase will be in full operation through FFY '25

FY21-25 Additional Funding Needed: \$0

 With additional funding, the following phases could be initiated or completed in FY21-25 (given resource/ workforce constraints and track outages): Not applicable

Edison Station Improvements

Coordinating Agency: NJ TRANSIT

In Partnership With:

Type: Improvement Benefit: Sole

Funding Status: Fully funded

General Project Information

Full Project Scope This project would relocate an existing freight turn-out switch to a location north of Plainfield Avenue by Edison Station and then extend the existing outbound high-level platform by 425 feet for a total platform length of

approximately 1,020 feet. Additional funding is required for design and construction.

Project Justification The extended platform will result in smoother passenger boarding and de-boarding as well as shorter dwell

times.

Total Project \$22,220,000
Cost Cost Derivation

\$22,220,000 Status of PBCA Agreement: Not applicable

Cost Derivation Methodology: Due to the unavailability of funding, the project currently remains at a 0% - 5% level of design completion. The 2013 cost estimate was prepared by NJ TRANSIT's Project Management staff as a ball-park estimate, and is

based upon the scope of similar civil and railroad systems construction projects.

PBCA Notes: Not applicable

Funding sources for entire project history NJ Transportation Trust Fund \$395,000

| Project Schedule | | | | | | | | |
|-------------------------------|---------------|---------------------|------|------|------|------|------|---------------------------|
| Phase | Cost Estimate | Schedule | FY21 | FY22 | FY23 | FY24 | FY25 | Notes |
| Feasibility/Conceptual Design | \$167,455 | Apr 2006 - Jun 2008 | | | | | | |
| PE/NEPA | \$1,500,000 | Jan 2022 - Dec 2022 | | | | | | |
| Final Design | \$3,000,000 | Jan 2023 - Jun 2024 | | | | | | Dates and cost are TBD |
| Construction | \$17,552,545 | Jul 2024 - Jul 2026 | | | | | | |

Edison Station Improvements

Coordinating Agency: NJ TRANSIT

In Partnership With:

Type: Improvement Benefit: Sole

Funding Status: Fully funded

One Year Information

FY21 Budget: Not applicable

FY21 Scope: No activities planned for FY21

FY21 Milestones:

• Not applicable

Five Year Information

FY21-25 Funding Available: \$22,200,000

 At this funding level, the following phases could be initiated or completed in FY21-25:
 If funding is allocated in State FY '23, the design and construction phases would begin.

FY21-25 Additional Funding Needed: \$0

 With additional funding, the following phases could be initiated or completed in FY21-25 (given resource/ workforce constraints and track outages): Not applicable

Elizabeth Station Improvements

Coordinating Agency: NJ TRANSIT

In Partnership With:

Type: Improvement Benefit: Sole

Funding Status: Partially funded

General Project Information

Full Project Scope This project would reconstruct two side high-level concrete passenger platforms and two station buildings including new elevators, stairs, ticketing offices, operational office spaces, and retail spaces. Additional funding is

required for design and construction.

Project Justification NJ TRANSIT plans to reconstruct the Elizabeth, NJ commuter rail station in its entirety with needed upgrades to bring the station up to current ADA compliance standards. The station activities will also accommodate a proposed future fifth track along the NEC planned to be built by Amtrak. The upgraded rail station will also

provide longer platforms for NJ TRANSIT trains.

Total Project \$71,000,000
Cost Cost Derivation

571,000,000 Status of PBCA Agreement: Not applicable

Cost Derivation Methodology: This project is being advanced under a "Design/Build" concept. A 30% level design package was completed by NJ TRANSIT's internal staff in 2015. The contractor/engineering team will complete the design as well as

construct the project.

PBCA Notes: Not applicable

Funding sources for entire project history FTA Formula Grants \$29,950,000 FTA Grant Nos. NJ-90-0023 and NJ-2017-020-00

NJ Transportation Trust Fund \$4,489,000

| Project Schedule | | | | | | | | |
|------------------------|---------------|---------------------|------|------|------|------|------|--|
| Phase | Cost Estimate | Schedule | FY21 | FY22 | FY23 | FY24 | FY25 | Notes |
| 30% Preliminary Design | \$6,180,000 | Jun 2011 - Jun 2013 | | | | | | |
| PE/NEPA | \$730,000 | Jan 2012 - Jul 2013 | | | | | | |
| Final Design | \$7,000,000 | Jun 2018 - Dec 2020 | | | | | | Design/Build Contract. 100% Final Design |
| Construction | \$57,090,000 | Oct 2018 - Dec 2022 | | | | | | Design/Build Contract |

Elizabeth Station Improvements

Coordinating Agency: NJ TRANSIT

In Partnership With:

Type: Improvement Benefit: Sole

Funding Status: Partially funded

One Year Information

FY21 Budget: \$20,000,000

FY21 Scope: The full construction work as described above will be continuing throughout the FY '21 fiscal year.

FY21 Milestones:

• Achieve 50% Completion (Dec 2020)

Five Year Information

FY21-25 Funding Available: \$34,400,000

 At this funding level, the following phases could be initiated or completed in FY21-25: Not Applicable. All construction activities will be underway within the subject 5-year fiscal year period.

FY21-25 Additional Funding Needed: \$36,600,000

 With additional funding, the following phases could be initiated or completed in FY21-25 (given resource/ workforce constraints and track outages):
 All required funding is anticipated to be allocated. As a consequence, the full construction scope of work is expected to proceed unimpeded.

Gateway: NJ TRANSIT Storage Yard

Coordinating Agency: NJ TRANSIT

In Partnership With: Amtrak, Port Authority of NY & NJ,

Gateway Program Development Corporation

Type: Improvement Benefit: Shared

Funding Status: Unfunded

General Project Information

Full Project Scope This project would locate a new rail yard in New Jersey to support the capacity and service increase goals of the Gateway Program. Additional funding is needed for NEPA/PE, design and construction.

Project Justification A rail yard in New Jersey would provide the layover storage and maintenance facilities necessary to optimize the new capacity enabled by track and station expansion projects associated with the Gateway Program. Many of the existing NJ TRANSIT train storage or maintenance facilities have constraints that preclude further expansion and/or are located in outlying areas. However, the greatest need for increased train storage and maintenance capacity is in close proximity to terminal stations and major hubs such as Penn Station New York (PSNY), Hoboken,

Secaucus, and Newark Penn Station.

Total Project Cost

Total Project Total Project Cost TBD Status of PBCA Agreement: Not started

Cost Derivation Methodology: The project is in early stages of development, full cost information is not yet available.

PBCA Notes: Not available

Funding sources for entire project history NJ Transportation Trust Fund \$399,000

| Project Schedule | | | | | | | | |
|-------------------------------|---------------|---------------------|------|------|------|------|------|-------|
| Phase | Cost Estimate | Schedule | FY21 | FY22 | FY23 | FY24 | FY25 | Notes |
| Feasibility/Conceptual Design | \$399,000 | Jan 2019 - Sep 2020 | | | | | | |
| ROW | | Jan 2023 - Jan 2024 | | | | | | |

Gateway: NJ TRANSIT Storage Yard

Coordinating Agency: NJ TRANSIT In Partnership With: Amtrak, Port Authority of NY & NJ,

Gateway Program Development Corporation Type: Improvement **Benefit:** Shared

Funding Status: Unfunded

One Year Information

FY21 Budget: Not applicable

FY21 Scope: No activities planned for FY21

FY21 Milestones:

• Not applicable

Five Year Information

FY21-25 Funding Available: \$0

At this funding level, the following phases could be initiated or completed in FY21-25: Not applicable

FY21-25 Additional Funding Needed: \$150,000,000

With additional funding, the following phases could be initiated or completed in FY21-25 (given resource/ workforce constraints and track outages): Most of the design phase and ROW acquisition could take place through 2025 if funding was available.

Hunter Flyover

Coordinating Agency: NJ TRANSIT

In Partnership With: Amtrak

Type: Improvement Benefit: Shared

Funding Status: Partially funded

General Project Information

Full Project Scope This project would construct an elevated viaduct structure to allow for NJ TRANSIT's Newark-bound Raritan Valley Line trains to cross over and above the NEC tracks to merge with the NEC's eastbound local track in order to continue their movement towards Newark. Additional funding is required for design and construction.

Project Justification Currently, Newark-bound Raritan Valley Line trains must travel along the westbound local track or cross the NEC at grade to reach the eastbound local track. NJ TRANSIT identified the need for a flyover that would eliminate atgrade crossings, thereby reducing conflict between trains, increasing capacity for NJ TRANSIT and Amtrak, and enabling NJ TRANSIT to improve Raritan Line service.

Total Project \$257,000,000
Cost Cost Derivation

\$257,000,000 Status of PBCA Agreement: Not available

Cost Derivation Methodology: As planning activities are expected to begin on or about July 2020, the project is currently at a 0% level of design completion. The 2012 cost estimate was prepared by NJ TRANSIT's Project Management staff as a ball-park estimate, and is based upon the scope of similar civil and railroad systems construction projects.

PBCA Notes: Not available

Funding sources for entire project history NJ Transportation Trust Fund \$500,000

| Project Schedule | | | | | | | | |
|-------------------------------|---------------|---------------------|------|------|------|------|------|---------------------------|
| Phase | Cost Estimate | Schedule | FY21 | FY22 | FY23 | FY24 | FY25 | Notes |
| Feasibility/Conceptual Design | \$500,000 | Apr 2020 - Oct 2022 | | | | | | |
| PE/NEPA | \$5,500,000 | | | | | | | |
| Final Design | \$10,000,000 | | | | | | | Dates and cost are TBD |
| Construction | \$241,000,000 | | | | | | | |

Hunter Flyover

Coordinating Agency: NJ TRANSIT In Partnership With: Amtrak

Type: Improvement Benefit: Shared

Funding Status: Partially funded

One Year Information

FY21 Budget: Not applicable

FY21 Scope: The Planning and Study Phase of the Project is expected to get underway during FFY '21

FY21 Milestones:

Not applicable

Five Year Information

FY21-25 Funding Available: \$500,000

 At this funding level, the following phases could be initiated or completed in FY21-25: Only the Planning and Study Phase

FY21-25 Additional Funding Needed: \$256,500,000

 With additional funding, the following phases could be initiated or completed in FY21-25 (given resource/ workforce constraints and track outages):
 With additional funding the design phase could be completed, and the construction phase would be able to commence.

Jersey Avenue Station

Coordinating Agency: NJ TRANSIT

In Partnership With:

Type: Improvement Benefit: Sole

Funding Status: Unfunded

General Project Information

Full Project Scope This project would reconstruct the existing station including new eastbound and westbound platforms. These improvements would be complemented by the addition of a new commuter parking lot that would be connected to the station via a pedestrian overpass. This project is being coordinated with the construction of NJ TRANSIT's

Delco Lead Project. Additional funding is required for design and construction.

Project Justification The purpose of the Jersey Avenue Station improvements is to make this station ADA accessible by installing new high-level platforms and elevators.

Total Project \$75,000,000
Cost Cost Derivation

\$75,000,000 Status of PBCA Agreement: Not applicable

Cost Derivation Methodology: Due to the unavailability of funding, the project currently remains at a 0% level of design completion. The 2012 cost estimate was prepared by NJ TRANSIT's Project Management staff as a ball-park estimate, and is based upon the scope of similar civil and railroad systems construction projects.

PBCA Notes: Not applicable

Funding sources for entire project history Not available

| Project Schedule | | | | | | | | |
|-------------------------------|---------------|----------|------|------|------|------|------|--------------------|
| Phase | Cost Estimate | Schedule | FY21 | FY22 | FY23 | FY24 | FY25 | Notes |
| Feasibility/Conceptual Design | \$1,000,000 | | | | | | | |
| PE/NEPA | \$3,000,000 | | | | | | | Dates and cost are |
| Final Design | \$7,000,000 | | | | | | | TBD |
| Construction | \$64,000,000 | | | | | | | |

Jersey Avenue Station

Coordinating Agency: NJ TRANSIT

In Partnership With:

Type: Improvement Benefit: Sole

Funding Status: Unfunded

One Year Information

FY21 Budget: Not applicable

FY21 Scope: No activities planned for FY21

FY21 Milestones:

• Not applicable

Five Year Information

FY21-25 Funding Available: \$0

 At this funding level, the following phases could be initiated or completed in FY21-25: Not applicable

FY21-25 Additional Funding Needed: \$75,000,000

 With additional funding, the following phases could be initiated or completed in FY21-25 (given resource/ workforce constraints and track outages):
 Commence and complete the Design Phase and, start the Construction Phase.

Metuchen Station Improvements

Coordinating Agency: NJ TRANSIT

In Partnership With:

Type: Improvement Benefit: Sole

Funding Status: Unfunded

General Project Information

Full Project Scope

This project would extend the existing outbound high-level platform at Metuchen Station by 360 feet. Additional

funding is required for design and construction.

Project Justification The extended platform will result in smoother passenger boarding and de-boarding as well as shorter dwell

Total Project \$31,000,000 Cost

Status of PBCA Agreement: Not applicable

Cost Derivation Methodology: Due to the unavailability of funding, the project currently remains at a 0% level of design completion. The 2012 cost estimate was prepared by NJ TRANSIT's Project Management staff as a ball-park estimate, and is based upon the scope of similar civil and railroad systems construction projects.

PBCA Notes: Not applicable

Funding sources for entire project history

NJ Transportation Trust Fund \$198,000

| Project Schedule | | | | | | | | |
|-------------------------------|---------------|---------------------|------|------|------|------|------|---------------------------|
| Phase | Cost Estimate | Schedule | FY21 | FY22 | FY23 | FY24 | FY25 | Notes |
| Feasibility/Conceptual Design | \$148,588 | Nov 2013 - Nov 2014 | | | | | | |
| PE/NEPA | \$1,500,000 | | | | | | | |
| Final Design | \$5,000,000 | | | | | | | Dates and cost are TBD |
| Construction | \$63,351,412 | | | | | | | |

Metuchen Station Improvements

Coordinating Agency: NJ TRANSIT

In Partnership With:

Type: Improvement Benefit: Sole

Funding Status: Unfunded

One Year Information

FY21 Budget: Not applicable

FY21 Scope: No activities planned for FY21

FY21 Milestones:

• Not applicable

Five Year Information

FY21-25 Funding Available: \$0

 At this funding level, the following phases could be initiated or completed in FY21-25: Not applicable

FY21-25 Additional Funding Needed: \$63,500,000

 With additional funding, the following phases could be initiated or completed in FY21-25 (given resource/ workforce constraints and track outages):
 Begin and complete the design phase, and commence the Construction Phase of the Project

Midline Loop

Coordinating Agency: NJ TRANSIT

In Partnership With: Amtrak

Type: Improvement Benefit: Shared

Funding Status: Unfunded

General Project Information

Full Project Scope This project would construct a new above-grade connection between existing and planned train storage facilities and the NY-bound local track of the NEC. The crossover would eliminate at-grade movements that create conflicts between commuter and intercity trains. Preliminary engineering is currently underway. Additional

funding is required for final design and construction.

Project Justification The Mid-line Loop will eliminate at-grade movements that create conflicts between commuter and intercity trains. In doing so, this new infrastructure will open up capacity for all users while improving reliability for NJ TRANSIT services that today must wait for a slot to open before they can cross tracks to begin New York-bound service. The capacity created will help enable the New Jersey High-Speed Rail Program's goal of 160-mph speeds on Acela, as well as support future express service patterns planned by NJ TRANSIT.

Total Project Cost

\$350,000,000 Status of PBCA Agreement: Not started

Cost Derivation Methodology: Due to the unavailability of funding, the project is currently at a 0% level of design completion. The 2012 cost estimate was prepared by NJ TRANSIT's Project Management staff as a ball-park estimate, and is based upon the scope of similar civil and railroad systems construction projects.

PBCA Notes: Not available

Funding sources for entire project history NJ Transportation Trust Fund \$5,382,844

NJ TRANSIT \$111,000 Operating Funds

Project Schedule **Cost Estimate** Schedule FY21 FY22 FY23 FY24 FY25 Notes Phase \$5,493,844 Sep 2013 - Feb 2017 PE/NEPA \$44,539,000 Final Design Dates and cost are Construction \$299,967,156

Midline Loop

Coordinating Agency: NJ TRANSIT In Partnership With: Amtrak

Type: Improvement Benefit: Shared

Funding Status: Unfunded

One Year Information

FY21 Budget: Not applicable

FY21 Scope: No activities planned for FY21

FY21 Milestones:

• Not applicable

Five Year Information

FY21-25 Funding Available: \$0

 At this funding level, the following phases could be initiated or completed in FY21-25: Not applicable

FY21-25 Additional Funding Needed: \$344,506,156

 With additional funding, the following phases could be initiated or completed in FY21-25 (given resource/ workforce constraints and track outages):
 The additional funding would allow for the start and completion of the Design Phase, and the commencement of the Construction Phase.

New Brunswick Station Improvements

Coordinating Agency: NJ TRANSIT

In Partnership With: Amtrak

Type: Improvement Benefit: Shared

Funding Status: Fully funded

General Project Information

Full Project Scope

This project would extend the current eastbound platform at New Brunswick Station by approximately 230 feet. Additional funding is required to design and construct an extension of the westbound platform and upgrade customer amenities at the station. The station is slated to undergo significant rehabilitation of its exterior brick façade; installation of new lighting, windows, HVAC system, and escalator; and painting.

Project Justification This major commuter rail station on NJ TRANSIT's NEC Line is in need of repairs in order to lengthen the useful life of the facility and to contain the cost to maintain the station.

Total Project \$20,303,000 Cost

Status of PBCA Agreement: In progress

Cost Derivation Methodology: This is a multi-tiered project consisting of 8 different components. Each component was cost estimated by NJ TRANSIT staff or by a Task Order Consultant (TOC) under contract to NJ TRANSIT. And, each has a separate start and completion date for each phase of the Project; New Elevator Tower; Pedestrian Walkway Overpass; Elevator Rehabilitation; Escalator Replacement; Escalator Rehabilitation; NEC Eastbound Extension; Station Repairs and, Soft Costs. The total estimated cost is in 2017 dollars.

PBCA Notes: Not available

Funding sources for entire project history

\$21,348,000 **New Jersey**

| Project Schedule | | | | | | | | |
|-------------------------------|---------------|---------------------|------|------|------|------|------|-------|
| Phase | Cost Estimate | Schedule | FY21 | FY22 | FY23 | FY24 | FY25 | Notes |
| Feasibility/Conceptual Design | \$600,000 | May 2007 - May 2012 | | | | | | |
| Final Design | \$2,000,000 | Jun 2012 - May 2019 | | | | | | |
| Construction | \$18,748,000 | Sep 2010 - Jul 2022 | | | | | | |

New Brunswick Station Improvements

Coordinating Agency: NJ TRANSIT In Partnership With: Amtrak

Type: Improvement Benefit: Shared

Funding Status: Fully funded

One Year Information

FY21 Budget: \$21,348,000

FY21 Scope: Activities expected to continue during FY '21 includes either design or construction work on the Pedestrian Walkway Overpass; Elevator Rehabilitation; Escalator Replacement; NEC Eastbound Extension; Station Repairs and, Soft Costs.

FY21 Milestones:

- NTP Escalator Replacement (Nov 2020)
- Construction Complete Elevator Rehabilitation (Feb 2021)

Five Year Information

FY21-25 Funding Available: \$21,348,000

 At this funding level, the following phases could be initiated or completed in FY21-25: Completion of the Design and Construction Phases is expected to be completed within the FY '21 to FY '25 fiscal year period.

FY21-25 Additional Funding Needed: \$0

 With additional funding, the following phases could be initiated or completed in FY21-25 (given resource/ workforce constraints and track outages): Not applicable

Newark Penn Station: NJ TRANSIT Projects

Coordinating Agency: NJ TRANSIT In Partnership With: Amtrak

Type: Improvement Benefit: Shared

Funding Status: Partially funded

General Project Information

Full Project Scope

Newark (NJ) Penn Station was constructed in various stages during 1929-1937. This aging, historic station requires replacement and/or upgrades of numerous infrastructure components throughout the facility. These components include, but are not limited to: the rehabilitation of Platform D; new vertical circulation units (elevators, escalators, and staircases); roof replacement; restrooms upgrades; HVAC system improvements; replacement of Terrazzo flooring throughout the station; painting; LED lighting installations; waiting room bench repairs/refurbishment; bus passenger facilities refurbishment; and display board upgrades throughout the facility; as well as potential structural improvements to the facility.

Project Justification

Newark Penn Station is the most heavily utilized NJ TRANSIT owned facility. This multi-modal station is northern New Jersey's primary access point to Amtrak intercity services and the national rail network, while also serving as a critical hub for numerous NJ TRANSIT modes/routes and the PATH rapid transit system. A series of recent studies and analyses has resulted in a comprehensive program of proposed Newark Penn Station improvements. These improvements would provide an enhanced experience for customers and would allow the overall station facility to be brought up to a state of good repair. Among the improvements, the upgraded PA system, signage, Departure Vision boards, rail platforms, streetscape improvements, and bus passenger facilities areas would all benefit the majority of Newark Penn Station customers who transfer between multiple transportation services.

Total Project \$454,000,000 Cost

Status of PBCA Agreement: Not available

Cost Derivation Methodology: Cost estimates are from multiple previously completed studies and analyses, including: Amtrak's Newark Penn Station Train Shed Assessment Report (2018); Amtrak's Newark Penn Station Structural Condition and Movement Assessment (2020); NJ TRANSIT's Newark Penn Station Passenger Circulation Study (2017); and NJ TRANSIT's 5-Year Capital Plan (2020).

PBCA Notes: Not available

Funding sources for entire project

history

FY17-18 Award for Newark Penn Station Platform D Federal State Partnership for SOGR \$18,445,000

Improvements

\$5,905,000 Match for FY17-18 SOGR Award **NJ TRANSIT** Other Amtrak Sources \$2,000,000 Match for FY17-18 SOGR Award

| Project Schedule | | | | | | | | |
|------------------------------------|---------------|---------------------|------|------|------|------|------|------------------------------------|
| Phase | Cost Estimate | Schedule | FY21 | FY22 | FY23 | FY24 | FY25 | Notes |
| Design: Platform D | | Dec 2020 - Jan 2024 | | | | | | |
| Construction: Platform D | | Feb 2024 - Aug 2028 | | | | | | |
| Final Design: Station Improvements | | | | | | | | 6 |
| Construction: Station Improvements | | | | | | | | Cost estimate and schedule are TBD |

Newark Penn Station: NJ TRANSIT Projects

Coordinating Agency: NJ TRANSIT In Partnership With: Amtrak

Type: Improvement Benefit: Shared

Funding Status: Partially funded

One Year Information

FY21 Budget: Not applicable

FY21 Scope: Notice to proceed on design for Platform D and begin 30% design activities.

FY21 Milestones:

• NTP Design (Dec 2020)

Five Year Information

FY21-25 Funding Available: \$26,350,000

 At this funding level, the following phases could be initiated or completed in FY21-25:
 Complete design phase and begin construction on Platform D

FY21-25 Additional Funding Needed: Not available

 With additional funding, the following phases could be initiated or completed in FY21-25 (given resource/ workforce constraints and track outages): Not available

NJ TRANSITGRID

Coordinating Agency: NJ TRANSIT

In Partnership With: Amtrak

Type: Improvement Benefit: Shared

Funding Status: Fully funded

General Project Information

Full Project Scope

This project will create a microgrid power generation and distribution system as a backup to the regional power network, allowing transit systems to function during storms or other times when the centralized power grid is compromised. NJ TRANSITGRID will incorporate renewable energy, distribution generation, and other technologies to provide resilient power to key NJ TRANSIT stations, maintenance facilities, bus garages, and other buildings. The project will also provide resilient electric traction power to NJ TRANSIT trains on critical corridors, including portions of the NEC, to continue to operate even when the traditional power grid fails.

Project Justification

Superstorm Sandy highlighted the need for infrastructure improvements to increase the resilience of the region's transit system to withstand another major climatological event. NJ TRANSIT partnered with the U.S. Department of Energy and other agencies to evaluate opportunities to develop an independent power generating system to permit the operation of core train services in the event of power outages. This collaboration resulted in the NJ TRANSIT GRID Project with the intent on constructing a "Microgrid Electric Power Generating System" that will provide a resilient power source to energize portions of the NEC, NJ TRANSIT's Morris & Essex rail line, and the Hudson-Bergen Light Rail. The completion of this project will also provide resilient power at selected rail stations and bus maintenance facilities.

Total Project \$577,353,000

Status of PBCA Agreement: In progress

Cost

Cost Derivation Methodology: The project is currently at a 20% level of design completion. The 2016 cost estimate was prepared by the Engineers-of-Record, Jacobs Engineering Group and AECOM.

PBCA Notes: Not available

Funding sources for entire project

history

FTA Formula Grants \$409,764,814 Two FTA Section 5324 Grants

NJ Transportation Trust Fund \$100,252,000

Other \$67,336,186

\$21,000,000 Sandy Recovery Funds for Substation 41 Other Federal Discretionary

\$36,408,410 FY19 Award for Reconstruction of Substation 41 Federal State Partnership for SOGR

\$15,603,604 Match for FY19 SOGR Award **New Jersey**

Project Schedule Cost Estimate Schedule FY21 FY22 FY23 FY24 FY25 Notes Phase PE/NEPA \$4,547,000 Jan 2016 - Jul 2019 \$23,000,000 Feb 2016 - Jun 2020 Final Design \$549,806,000 Nov 2020 - Feb 2025 Construction \$7,400,000 Substation 41: Final Design Mar 2021 - Sep 2021 \$600,000 Sep 2021 - Dec 2022 Substation 41: NEPA Update Substation 41: Construction \$65.010.000 May 2023 - Apr 2025

NJ TRANSITGRID

Coordinating Agency: NJ TRANSIT In Partnership With: Amtrak

Type: Improvement Benefit: Shared

Funding Status: Fully funded

One Year Information

FY21 Budget: \$76,394,000

FY21 Scope: The contract for the Distributed Generation (DG) contract is expected to receive approval from NJ TRANSIT's Board of Directors. The design of the Microgrid Central Facility (MCF) is expected to continue until reaching 100% complete.

FY21 Milestones:

- Construction Start DG (Nov 2020)
- Complete Design MCF (Dec 2020)
- NTP Issued DG (Jan 2021)

Five Year Information

FY21-25 Funding Available: \$547,268,000

 At this funding level, the following phases could be initiated or completed in FY21-25: The Design and Construction Phase activities are expected to continue throughout the FY '21 to FY '25 fiscal year period.

FY21-25 Additional Funding Needed: \$0

 With additional funding, the following phases could be initiated or completed in FY21-25 (given resource/ workforce constraints and track outages): Not applicable

North Elizabeth Station Improvements

Coordinating Agency: NJ TRANSIT

In Partnership With:

Type: Improvement Benefit: Sole

Funding Status: Unfunded

General Project Information

Full Project Scope This project would rehabilitate the existing high-level concrete platform and replace the tactile warning edge material on both the eastbound and westbound platforms at North Elizabeth Station. Additional funding is

required for construction.

Project Justification An inspection indicated that there is advanced deterioration of the expansion joints, rub rail, and the concrete

deck on both the eastbound and westbound high-level platforms.

Total Project \$998,000 Cost Cost Poriu

\$998,000 Status of PBCA Agreement: Not applicable

Cost Derivation Methodology: The project is currently at a 100% level of design completion. The 2018 cost estimate was

prepared by NJ TRANSIT's Project Management staff.

PBCA Notes: Not applicable

Funding sources for entire project history

NJ TRANSIT \$281,000

Project Schedule

| Phase | Cost Estimate | Schedule | FY21 | FY22 | FY23 | FY24 | FY25 | Notes |
|--------------|---------------|---------------------|------|------|------|------|------|-------------------|
| Final Design | \$281,000 | Nov 2010 - Oct 2011 | | | | | | |
| Construction | \$717,000 | | | | | | | Date and cost TBD |

North Elizabeth Station Improvements

Coordinating Agency: NJ TRANSIT

In Partnership With:

Type: Improvement Benefit: Sole

Funding Status: Unfunded

One Year Information

FY21 Budget: Not applicable

FY21 Scope: No activities planned for FY21

FY21 Milestones:

• Not applicable

Five Year Information

FY21-25 Funding Available: \$0

 At this funding level, the following phases could be initiated or completed in FY21-25: Not applicable

FY21-25 Additional Funding Needed: \$717,000

 With additional funding, the following phases could be initiated or completed in FY21-25 (given resource/ workforce constraints and track outages):
 Once funding is allocated, the Construction Phase of the project could begin.

Penn Station New York: NJ TRANSIT Projects

Coordinating Agency: NJ TRANSIT In Partnership With: Amtrak

Type: Improvement Benefit: Shared

Funding Status: Partially funded

General Project Information

Full Project Scope

This project would make much needed improvements to Penn Station New York. Among the projects being advanced are extending the existing Central Concourse to allow for more vertical access to existing train platforms, improving the existing Hilton Corridor so it better connects between vertical access points to platforms, and improving signage and wayfinding to facilitate the safe and efficient movement of passengers and visitors. While some funding is programmed for this work, additional funding is needed to make all the necessary improvements. This is an enabling project for Major Backlog project Gateway: Penn Station Expansion.

Project Justification

Construction of the multiple planned improvement projects at Penn Station New York will primarily be targeted on improving commuter safety and convenience. These projects will address serious vertical access and egress issues that currently exist between platforms and the various other levels of the station in an effort to increase capacity and improve the passenger experience. This project creates the connection between existing Penn Station and Penn Station Expansion.

Total Project \$75,000,000 Cost

Status of PBCA Agreement: In progress

Cost Derivation Methodology: The repairs proposed to be undertaken for Penn Station New York currently include multiple projects, including Refurbishing and Expanding the Hilton Corridor; a Unified Signage Program, and; Relocation of the 7th Avenue Artwork. As each project has a different start and completion time, the design completion levels range from 0% to 100%. The 2018 cost estimate was prepared by NJ TRANSIT's Project Management staff.

PBCA Notes: Not available

Funding sources for entire project history

FTA Formula Grants \$11,018,000

| Project Schedule | | | | | | | | |
|-------------------------------|---------------|---------------------|------|------|------|------|------|--------------------|
| Phase | Cost Estimate | Schedule | FY21 | FY22 | FY23 | FY24 | FY25 | Notes |
| Feasibility/Conceptual Design | \$441,000 | Nov 2015 - Aug 2016 | | | | | | |
| Final Design | \$10,577,000 | Sep 2016 - Aug 2018 | | | | | | Dates and cost are |
| Construction | \$63,982,000 | Start Mar 2021 | | | | | | TBD |

Penn Station New York: NJ TRANSIT Projects

Coordinating Agency: NJ TRANSIT In Partnership With: Amtrak

Type: Improvement Benefit: Shared

Funding Status: Partially funded

One Year Information

FY21 Budget: \$10,028,000

FY21 Scope: The removal of the Transit Art is expected to get underway. Some work on the Hilton Passageway is expected to begin during the fiscal year.

FY21 Milestones:

- NTP Transit Arts Removal (Mar 2021)
- NTP Hilton Passageway Project (Mar 2021)

Five Year Information

FY21-25 Funding Available: \$10,028,000

 At this funding level, the following phases could be initiated or completed in FY21-25:
 Completion of 2 of the projects would be achieved.
 Currently the Unified Signage Project would not be able to proceed.

FY21-25 Additional Funding Needed: \$65,000,000

 With additional funding, the following phases could be initiated or completed in FY21-25 (given resource/ workforce constraints and track outages):
 With additional funding construction activities could commence throughout the station.

Princeton Junction Station Improvements

Coordinating Agency: NJ TRANSIT

In Partnership With: Amtrak

Type: Improvement Benefit: Shared

Funding Status: Fully funded

General Project Information

Full Project Scope This project will install a tactile edge panel at each of the three platforms where passengers load onto trains bound for Trenton and Newark as well as the local Dinky to Princeton. Interim repairs to the platforms will also be

undertaken as needed.

Project Justification An inspection indicated that there is advanced deterioration of the tactile warning surface in addition to the three platforms themselves. This work will bring the station up to a state of good repair for the benefit of the stations

users.

Total Project \$747,000 Cost Cost Deriv

\$747,000 Status of PBCA Agreement: In progress

Cost Derivation Methodology: The project is currently at a 100% level of design completion. The 2018 cost estimate was

prepared by NJ TRANSIT's Project Management staff.

PBCA Notes: Not available

Funding sources for entire project history NJ Transportation Trust Fund \$747,000

| Project Schedule | | | | | | | | |
|------------------|---------------|---------------------|------|------|------|------|------|-------|
| Phase | Cost Estimate | Schedule | FY21 | FY22 | FY23 | FY24 | FY25 | Notes |
| Final Design | \$100,000 | Jul 2011 - Oct 2011 | | | | | | |
| Construction | \$647,000 | Jul 2020 - Mar 2021 | | | | | | |

Princeton Junction Station Improvements

Coordinating Agency: NJ TRANSIT In Partnership With: Amtrak

Type: Improvement Benefit: Shared

Funding Status: Fully funded

One Year Information

FY21 Budget: \$747,000

FY21 Scope: Repair of the platform would begin and be completed.

FY21 Milestones:

• Not applicable

Five Year Information

FY21-25 Funding Available: \$747,000

 At this funding level, the following phases could be initiated or completed in FY21-25: Completion of the Construction Phase

FY21-25 Additional Funding Needed: \$0

 With additional funding, the following phases could be initiated or completed in FY21-25 (given resource/ workforce constraints and track outages): Not applicable

Trenton Transit Center Improvements

Coordinating Agency: NJ TRANSIT In Partnership With: Amtrak

Type: Improvement Benefit: Shared

Funding Status: Unfunded

General Project Information

Full Project Scope

Trenton Transit Center is a critical intermodal facility for New Jersey's capital city and the central New Jersey region. Ten different Amtrak intercity routes serve the Trenton Transit Center, along with NJ TRANSIT's Northeast Corridor (NEC) Line and the Southeastern Pennsylvania Transportation Authority's (SEPTA) Trenton Line commuter rail services. The Trenton Transit Center also provides connections to/from NJ TRANSIT's RiverLINE light rail service, 12 intrastate bus routes, one interstate Philadelphia-bound bus route, and one SEPTA bus route. Recent analyses have resulted in a multifaceted improvement program proposed for Trenton Transit Center. The proposed work includes, but is not limited to: constructing a new high-level platform (replacing an existing low-level platform) to better accommodate increased high speed and intercity rail service; reconstructing existing island platform edges; removing wooden platform components and replacing them with concrete; replacing overhead canopies that have reached the end of useful life; modernization of escalators and elevators; and installing improved drainage systems. The canopy enhancements will incorporate energy-efficient LED lighting, new variable message sign boards, and a new public announcement system with enhanced speakers.

Project Justification

Trenton Transit Center is a high traffic and high-profile station in New Jersey's capital city that is utilized by Amtrak, NJ TRANSIT and SEPTA customers. Platform and canopy improvements would reduce maintenance frequency and allow for more efficient and safe boarding for station customers. Modernized escalators and elevators will result in improved vertical circulation and lower maintenance costs. Enhanced communication systems and lighting will bring added comfort to the customer experience and improved passenger safety throughout the station.

Total Project \$49,000,000 Cost Cost Desiration

\$49,000,000 Status of PBCA Agreement: Not available

Cost Derivation Methodology: New analyses for various infrastructure components at the Trenton Transit Center were conducted as part of NJ TRANSIT's recently completed 5-Year Capital Plan effort

PBCA Notes: Not available

Funding sources for entire project history Not available

| Project Schedule | | | | | | | | |
|------------------|---------------|----------|------|------|------|------|------|-------------------|
| Phase | Cost Estimate | Schedule | FY21 | FY22 | FY23 | FY24 | FY25 | Notes |
| Final Design | | | | | | | | Cost estimate and |
| Construction | | | | | | | | schedule are TBD |

Trenton Transit Center Improvements

Coordinating Agency: NJ TRANSIT In Partnership With: Amtrak

Type: Improvement Benefit: Shared

Funding Status: Unfunded

One Year Information

FY21 Budget: Not applicable

FY21 Scope: No activities planned for FY21

FY21 Milestones:

Not applicable

Five Year Information

FY21-25 Funding Available: \$0

 At this funding level, the following phases could be initiated or completed in FY21-25: Not available

FY21-25 Additional Funding Needed: \$23,690,000

 With additional funding, the following phases could be initiated or completed in FY21-25 (given resource/ workforce constraints and track outages):
 With \$23.69MM, a series of improvements could be completed that includes canopy and platform rehab, elevator & escalator improvements, and replacement of a low-level platform with a new high-level platform.

Harrisburg Line Interlocking Improvements: Paoli

Coordinating Agency: Pennsylvania DOT In Partnership With: Amtrak, SEPTA

Type: Improvement Benefit: Shared

Funding Status: Unfunded

General Project Information

Full Project Scope

Recognizing that the interlockings on Amtrak's Keystone Corridor and SEPTA's Paoli-Thorndale Regional Rail Line have far exceeded their useful life and are functionally obsolete, PennDOT, in coordination with SEPTA and Amtrak, advanced a comprehensive conceptual design effort to evaluate and reconfigure the system of interlockings along the Line. The purpose of the conceptual design was to determine how to address the infrastructure condition and functionality to achieve both a state of good repair and optimal service performance on the highly utilized segment of the Keystone Corridor. Through an advanced conceptual design effort, which was last updated in 2015, PennDOT, Amtrak and SEPTA agreed that the following infrastructure replacements or reconfiguration would best support current and future growth along the corridor, as described below. Following the conceptual design phase, PennDOT led preliminary engineering of all interlockings in coordination with Amtrak and SEPTA. Additional funding is needed to advance these critical infrastructure projects to construction. Paoli Interlocking: Modernize and reconfigure. Preliminary engineering complete.

Project Justification

This project is a state of good repair initiative that will improve operational efficiencies by replacing or reconfiguring the functionally obsolete interlockings on Amtrak's Keystone Corridor and SEPTA's Paoli-Thorndale Line. Having far exceeded their useful, the interlockings currently in operation are outdated, which prohibits the most efficient and timely use of the interlocking and challenges reliability. The current interlocking configuration is no longer able to effectively support the ridership demands on the Line. SEPTA's Paoli-Thorndale Line is the highest ridership line on SEPTA's Regional Rail Network and provides over 7.9 million trips annually. Ridership has continually increased and trains are frequently operating at capacity or over capacity. To support existing and future ridership growth, SEPTA must enhance service. SEPTA's ability to enhance or alter service is stymied by the limitations of the existing interlockings. In order to address the ridership demand faced by both SEPTA and Amtrak, new interlockings are needed.

Total Project Cost

\$84,187,943

Status of PBCA Agreement: Not available

Cost Derivation Methodology: The cost estimate was developed based on the 30% design submission submitted in 2014. The budget amount is subject to change based on timing and Amtrak's final budget for support costs.

PBCA Notes: Not available

Funding sources for entire project history FRA ARRA Grant

\$1,159,149

Pennsylvania \$128,794

| Project Schedule | | | | | | | | |
|------------------|---------------|---------------------|------|------|------|------|------|-------|
| Phase | Cost Estimate | Schedule | FY21 | FY22 | FY23 | FY24 | FY25 | Notes |
| PE/NEPA | \$1,287,943 | | | | | | | |
| Final Design | \$13,800,000 | Jan 2025 - Jan 2027 | | | | | | |
| Construction | \$69,100,000 | | | | | | | |

Harrisburg Line Interlocking Improvements: Paoli

Coordinating Agency: Pennsylvania DOT In Partnership With: Amtrak, SEPTA

Type: Improvement Benefit: Shared

Funding Status: Unfunded

One Year Information

FY21 Budget: Not applicable

FY21 Scope: No activities planned for FY21

FY21 Milestones:

• Not applicable

Five Year Information

FY21-25 Funding Available: \$0

 At this funding level, the following phases could be initiated or completed in FY21-25: Not applicable

FY21-25 Additional Funding Needed: \$0

 With additional funding, the following phases could be initiated or completed in FY21-25 (given resource/ workforce constraints and track outages):
 Amtrak resources are not available

Harrisburg Line Interlocking Improvements: Potts

Coordinating Agency: Pennsylvania DOT In Partnership With: Amtrak, SEPTA

Type: Improvement Benefit: Shared

Funding Status: Unfunded

General Project Information

Full Project Scope

Recognizing that the interlockings on Amtrak's Keystone Corridor and SEPTA's Paoli-Thorndale Regional Rail Line have far exceeded their useful life and are functionally obsolete, PennDOT, in coordination with SEPTA and Amtrak, advanced a comprehensive conceptual design effort to evaluate and reconfigure the system of interlockings along the Line. The purpose of the conceptual design was to determine how to address the infrastructure condition and functionality to achieve both a state of good repair and optimal service performance on the highly utilized segment of the Keystone Corridor. Through an advanced conceptual design effort, which was last updated in 2015, PennDOT, Amtrak and SEPTA agreed that the following infrastructure replacements or reconfiguration would best support current and future growth along the corridor, as described below. Following the conceptual design phase, PennDOT led preliminary engineering of all interlockings and final design of Zoo Interlocking in coordination with Amtrak and SEPTA. Additional funding is needed to advance these critical infrastructure projects to construction. Potts Interlocking: New interlocking. Preliminary engineering complete

Project Justification

This project is a state of good repair initiative that will improve operational efficiencies by replacing or reconfiguring the functionally obsolete interlockings on Amtrak's Keystone Corridor and SEPTA's Paoli-Thorndale Line. Having far exceeded their useful, the interlockings currently in operation are outdated, which prohibits the most efficient and timely use of the interlocking and challenges reliability. The current interlocking configuration is no longer able to effectively support the ridership demands on the Line. SEPTA's Paoli-Thorndale Line is the highest ridership line on SEPTA's Regional Rail Network and provides over 7.9 million trips annually. Ridership has continually increased and trains are frequently operating at capacity or over capacity. To support existing and future ridership growth, SEPTA must enhance service. SEPTA's ability to enhance or alter service is stymied by the limitations of the existing interlockings. In order to address the ridership demand faced by both SEPTA and Amtrak, new interlockings are needed

Total Project Cost

\$30,346,286

Status of PBCA Agreement: Not available

Cost Derivation Methodology: The cost estimate was developed based on the 30% design submission submitted in 2014. The budget amount is subject to change based on timing and Amtrak's final budget for support costs

PBCA Notes: Not available

Funding sources for entire project history FRA ARRA Grant \$761,657

Pennsylvania \$84,629

| Project Schedule | | | | | | | | |
|-------------------------------|---------------|---------------------|------|------|------|------|------|-------|
| Phase | Cost Estimate | Schedule | FY21 | FY22 | FY23 | FY24 | FY25 | Notes |
| Feasibility/Conceptual Design | \$846,286 | | | | | | | |
| PE/NEPA | \$1,500,000 | Jan 2012 - Jun 2014 | | | | | | |
| Final Design | \$4,600,000 | Oct 2025 - Jun 2027 | | | | | | |
| Construction | \$23,400,000 | | | | | | | |

Harrisburg Line Interlocking Improvements: Potts

Coordinating Agency: Pennsylvania DOT In Partnership With: Amtrak, SEPTA

Type: Improvement Benefit: Shared

Funding Status: Unfunded

One Year Information

FY21 Budget: Not applicable

FY21 Scope: No activities planned for FY21

FY21 Milestones:

• Not applicable

Five Year Information

FY21-25 Funding Available: \$0

 At this funding level, the following phases could be initiated or completed in FY21-25: Not applicable

FY21-25 Additional Funding Needed: \$4,600,000

 With additional funding, the following phases could be initiated or completed in FY21-25 (given resource/ workforce constraints and track outages):
 Amtrak resources are not available

Harrisburg Line Interlocking Improvements: Zoo

Coordinating Agency: Pennsylvania DOT In Partnership With: Amtrak, SEPTA

Type: Improvement Benefit: Shared

Funding Status: Partially funded

General Project Information

Full Project Scope

Recognizing that the interlockings on Amtrak's Keystone Corridor and SEPTA's Paoli-Thorndale Regional Rail Line have far exceeded their useful life and are functionally obsolete, PennDOT, in coordination with SEPTA and Amtrak, advanced a comprehensive conceptual design effort to evaluate and reconfigure the system of interlockings along the Line. The purpose of the conceptual design was to determine how to address the infrastructure condition and functionality to achieve both a state of good repair and optimal service performance on the highly utilized segment of the Keystone Corridor. Through an advanced conceptual design effort, which was last updated in 2015, PennDOT, Amtrak and SEPTA agreed that the following infrastructure replacements or reconfiguration would best support current and future growth along the corridor, as described below. Following the conceptual design phase, PennDOT led preliminary engineering of all interlockings and final design of Zoo Interlocking in coordination with Amtrak and SEPTA. The total project cost for Zoo Interlocking is an estimated \$119.5M. Given the importance of this project, PennDOT has worked with Amtrak and SEPTA to identify an early action scope of work for completing the Zoo Interlocking state of good repair improvements. The Project will first include the replacement of two stone masonry retaining walls, totaling 1,400 feet of new infrastructure. The current retaining walls are listing or leaning significantly and at risk of failure that could cause damage to track, signal, and electrification infrastructure and destabilize the slope. The first phase of track work will modernize the Track 2 through freight track, including the replacement of wooden ties with concrete ties and continuous welded rail. The second phase of the Project will require track reconfiguration and state of good repair updates on the western end of the ZOO Interlocking, including the construction of new concrete tie tracks, the removal of one turnout and 500 feet of existing track, and various signal and OCS improvements to create a through movement for westbound trains. The retaining wall construction and first and second phase of track work can begin in the early calendar year 2020 and can be fully completed by 2024. These projects have the potential to save 45 - 70 seconds per train. The cost of this early action scope of work is \$55.2M.

Project Justification

This project is a state of good repair initiative that will improve operational efficiencies increase train speed and capacity and decrease travel time, by replacing or reconfiguring the functionally obsolete interlockings on Amtrak's Keystone Corridor and SEPTA's Paoli-Thorndale Line. Having far exceeded their useful, the interlockings currently in operation are outdated, which prohibits the most efficient and timely use of the interlocking and challenges reliability. The current interlocking configuration is no longer able to effectively support the ridership demands on the Line. Including SEPTA and Amtrak service, over 8 million passenger pass through Zoo Interlocking annually. Ridership has continually increased and trains are frequently operating at capacity or over capacity. SEPTA and Amtrak have limited ability to enhance or alter service because of the limitations of Zoo Interlocking.

Total Project Cost

\$120,831,526 Status of PBCA Agreement: Not available

Cost Derivation Methodology: The cost estimate was developed based on the 90% design submission. The budget amount is subject to change based on timing and Amtrak's final budget for support costs

PBCA Notes: Not available

Funding sources for entire project history FRA ARRA Grant \$1,198,374

Federal State Partnership for SOGR \$15,140,236 FY17-18 Award for Keystone Corridor Zoo Interlocking State

of Good Repair Improvements Project

PennDOT \$11,040,000 Match for FY17-18 SOGR Award

FTA Formula Grants \$29,019,764 FTA Section 5337 Funds \$16,560,000

| Project Schedule | | | | | | | | |
|------------------|---------------|---------------------|------|------|------|------|------|-------|
| Phase | Cost Estimate | Schedule | FY21 | FY22 | FY23 | FY24 | FY25 | Notes |
| PE/NEPA | \$1,331,526 | | | | | | | |
| Final Design | \$20,000,000 | Jan 2020 - Jan 2024 | | | | | | |
| Construction | \$99,500,000 | Start Aug 2021 | | | | | | |

Harrisburg Line Interlocking Improvements: Zoo

Coordinating Agency: Pennsylvania DOT In Partnership With: Amtrak, SEPTA

Type: Improvement Benefit: Shared

Funding Status: Partially funded

One Year Information

FY21 Budget: \$2,000,000

FY21 Scope: Phase 1 final design will be completed in FY 2021. This design will address reconstruction of retaining walls in the area of 40th Street, Philadelphia and track reconstruction adjacent to the wall.

FY21 Milestones:

• 100% final design (Sep 2021)

Five Year Information

FY21-25 Funding Available: \$56,531,526

 At this funding level, the following phases could be initiated or completed in FY21-25: Reconstruction of retaining walls in the area of 40th Street, Philadelphia and track reconstruction adjacent to the wall.

FY21-25 Additional Funding Needed: \$7,500,000

 With additional funding, the following phases could be initiated or completed in FY21-25 (given resource/ workforce constraints and track outages): Final Design of Phase 2 work.

Harrisburg Line Station Improvements: Coatesville

Coordinating Agency: Pennsylvania DOT

In Partnership With: Amtrak, Federal Transit Administration

Type: Improvement Benefit: Shared

Funding Status: Fully funded

General Project Information

Full Project Scope This project will eventually modernize the Amtrak station at Coatesville, along the Harrisburg Line. PennDOT is leading construction. The new station will provide ADA access with high-level boarding platforms, improved/expanded parking, and multimodal connections. This project will improve the passenger experience and lead to

community and economic development.

Project Justification These improvements will provide ADA access with high-level boarding platforms and improved parking.

Total Project Cost

\$65,000,000 Status of PBCA Agreement: Not available

Cost Derivation Methodology: The cost estimate was developed based on the 90% design submission submitted in 2018. The

budget amount is subject to change based on timing and Amtrak's final budget for support costs

PBCA Notes: Not available

Pennsylvania

Funding sources for entire project history FTA Formula Grants \$48,000,000 FTA Section 5307 and Section 5337 grants

\$17,000,000

| Project Schedule | | | | | | | | |
|------------------|---------------|---------------------|------|------|------|------|------|-------|
| Phase | Cost Estimate | Schedule | FY21 | FY22 | FY23 | FY24 | FY25 | Notes |
| PE/NEPA | \$2,000,000 | Jan 2013 - Sep 2014 | | | | | | |
| Final Design | \$5,000,000 | Oct 2015 - Oct 2020 | | | | | | |
| Construction | \$60,000,000 | Oct 2020 - Oct 2023 | | | | | | |

Harrisburg Line Station Improvements: Coatesville

Coordinating Agency: Pennsylvania DOT

Type: Improvement Benefit: Shared

In Partnership With: Amtrak, Federal Transit Administration

Funding Status: Fully funded

One Year Information

FY21 Budget: \$15,000,000

FY21 Scope: Sheet piling on the south side to support the tracks. Caissons and retaining walls on the south side to support the high level platforms. Construction of the south elevator and stair tower.

FY21 Milestones:

Start physical work (Feb 2021)

Five Year Information

FY21-25 Funding Available: \$55,000,000

 At this funding level, the following phases could be initiated or completed in FY21-25: Project to be completed in Dec 2023

FY21-25 Additional Funding Needed: \$0

Harrisburg Line Station Improvements: Downingtown

Coordinating Agency: Pennsylvania DOT In Partnership With: Amtrak, SEPTA, Federal Transit

Administration

Type: Improvement Funding Status: Partially funded

Benefit: Shared

General Project Information

Full Project Scope

This project will eventually modernize the Amtrak station at Downingtown, along the Harrisburg Line. PennDOT is leading construction. The new station will provide ADA access with high-level boarding platforms, improved/ expanded parking, and multimodal connections. This project will improve the passenger experience and lead to community and economic development. To facilitate the construction of the new station with high level platforms, a new Amtrak overhead bridge over US 322 will need to be built prior to constructing the station facility. The new bridge will allow pedestrian access between east bound and west bound rail travel.

Project Justification These improvements will provide ADA access with high-level boarding platforms and improved parking.

Total Project

Cost

\$115,500,000 Status of PBCA Agreement: Not available

Cost Derivation Methodology: The cost estimate was developed based on conceptual estimates in 2018.

Pennsylvania

PBCA Notes: Not available

Funding sources for entire project

history

FTA Formula Grants \$16,348,952

\$4,087,238 State match to FTA Grant

| Project Schedule | | | | | | | | |
|------------------|---------------|---------------------|------|------|------|------|------|-------|
| Phase | Cost Estimate | Schedule | FY21 | FY22 | FY23 | FY24 | FY25 | Notes |
| PE/NEPA | \$1,000,000 | Feb 2019 - Jul 2021 | | | | | | |
| Final Design | \$9,500,000 | Aug 2021 - Dec 2022 | | | | | | |
| Construction | \$105,000,000 | Start Jan 2023 | | | | | | |

Harrisburg Line Station Improvements: Downingtown

Coordinating Agency: Pennsylvania DOT In Partnership With: Amtrak, SEPTA, Federal Transit

Administration

Type: Improvement Funding Status: Partially funded

Benefit: Shared

One Year Information

FY21 Budget: \$2,500,000

FY21 Scope: Final design of building demolition in the north east quadrant. Preliminary engineering of the bridge replacement.

FY21 Milestones:

• 100% building Demo (Jan 2021)

Five Year Information

FY21-25 Funding Available: \$20,436,190

At this funding level, the following phases could be initiated or completed in FY21-25: Complete building demo in north east quadrant. Complete final design of Amtrak overhead bridge. Initiate construction of Amtrak overhead bridge. Initiate final design of station facility.

FY21-25 Additional Funding Needed: \$8,000,000

With additional funding, the following phases could be initiated or completed in FY21-25 (given resource/ workforce constraints and track outages): Amtrak resources are not available

Notes: Additional funding, including track outages, will be needed to complete the construction of the entire project.

Harrisburg Line Station Improvements: Lancaster

Coordinating Agency: Pennsylvania DOT

In Partnership With: Amtrak, Federal Transit Administration

Type: Improvement Benefit: Shared

Funding Status: Partially funded

General Project Information

Full Project Scope Lancaster is the second busiest station on the Keystone Corridor. The biggest constraint to additional rail travel is the lack of parking at the station. This project will add approximately 200 additional parking stalls on the north side of the tracks. Station access will be provided by an elevator and stair tower along with a concourse

extension.

Project Justification Lancaster is the second busiest station on the Keystone Corridor. The lack of available parking restricts people

from using rail travel. The additional parking will generate more rail travelers.

Total Project Cost

Total Project \$16,000,000 Status of PBCA Agreement: Not available

Cost Derivation Methodology: The cost estimate was developed based on conceptual data in 2020. The budget amount is

subject to change based on timing and Amtrak's support costs.

PBCA Notes: Not available

Funding sources for entire project history FTA Formula Grants \$1,600,000 FTA Section 5307 and Section 5337 grant

Pennsylvania \$400,000

| Project Schedule | | | | | | | | |
|------------------|---------------|---------------------|------|------|------|------|------|-------|
| Phase | Cost Estimate | Schedule | FY21 | FY22 | FY23 | FY24 | FY25 | Notes |
| PE/NEPA | \$1,200,000 | May 2020 - Sep 2020 | | | | | | |
| Final Design | \$2,000,000 | Oct 2020 - May 2021 | | | | | | |
| Construction | \$12,800,000 | Sep 2021 - Nov 2022 | | | | | | |

Harrisburg Line Station Improvements: Lancaster

Coordinating Agency: Pennsylvania DOT

In Partnership With: Amtrak, Federal Transit Administration
Type: Improvement
Benefit: Shared

Funding Status: Partially funded

One Year Information

FY21 Budget: \$2,000,000

FY21 Scope: Completion of final design for the project

FY21 Milestones:

• Design completion (May 2021)

Five Year Information

FY21-25 Funding Available: \$2,000,000

 At this funding level, the following phases could be initiated or completed in FY21-25: Complete Design

FY21-25 Additional Funding Needed: \$14,000,000

Harrisburg Line Station Improvements: Middletown

Coordinating Agency: Pennsylvania DOT

In Partnership With: Amtrak, Federal Transit Administration

Type: Improvement Benefit: Shared

Funding Status: Fully funded

General Project Information

Full Project Scope This project will eventually modernize the Amtrak station at Middletown, along the Harrisburg Line. PennDOT is leading construction. The new station will provide ADA access with high-level boarding platforms, improved/expanded parking, and multimodal connections. This project will improve the passenger experience and lead to

community and economic development.

Project Justification These improvements will provide ADA access with high-level boarding platforms and improved parking.

Total Project Cost \$44,000,000 Status of PBCA Agreement: Not available

Cost Derivation Methodology: The cost estimate was developed based on the actual bid prices in 2020. The budget amount is subject to change based on timing and Amtrak's final budget for support costs.

PBCA Notes: Not available

Pennsylvania

Funding sources for entire project history FTA Formula Grants \$34,500,000 FTA Section 5307 and Section 5337 grants

\$9,500,000 State match to FTA Grant

| Project Schedule | | | | | | | | |
|------------------|---------------|---------------------|------|------|------|------|------|-------|
| Phase | Cost Estimate | Schedule | FY21 | FY22 | FY23 | FY24 | FY25 | Notes |
| PE/NEPA | \$3,000,000 | Jan 2014 - Sep 2015 | | | | | | |
| Final Design | \$5,000,000 | Oct 2015 - Dec 2019 | | | | | | |
| Construction | \$36,000,000 | Sep 2018 - Sep 2021 | | | | | | |

Harrisburg Line Station Improvements: Middletown

Coordinating Agency: Pennsylvania DOT

In Partnership With: Amtrak, Federal Transit Administration
Type: Improvement
Benefit: Shared

Funding Status: Fully funded

One Year Information

FY21 Budget: \$10,000,000

FY21 Scope: Completion of Station Construction

FY21 Milestones:

• Construction completion (Sep 2021)

Five Year Information

FY21-25 Funding Available: \$10,000,000

 At this funding level, the following phases could be initiated or completed in FY21-25: Project completion

FY21-25 Additional Funding Needed: \$0

Harrisburg Line Station Improvements: Parkesburg

Coordinating Agency: Pennsylvania DOT

In Partnership With: Amtrak, Federal Transit Administration

Type: Improvement Benefit: Shared

Funding Status: Partially funded

General Project Information

Full Project Scope This project will eventually modernize the Amtrak station at Parkesburg, along the Harrisburg Line. PennDOT is leading construction. The new station will provide ADA access with high-level boarding platforms, improved/expanded parking, and multimodal connections. This project will improve the passenger experience and lead to

community and economic development.

Project

These improvements will provide ADA access with high-level boarding platforms and improved parking.

Justification

\$49,000,000 Status of PBCA Agreement: Not available

Total Project Cost

Cost Derivation Methodology: The cost estimate was developed based on conceptual estimates in 2018.

PBCA Notes: Not available

Funding sources for entire project history FTA Formula Grants \$2,800,000 Pennsylvania \$700,000

| Project Schedule | | | | | | | | |
|------------------|---------------|---------------------|------|------|------|------|------|-------|
| Phase | Cost Estimate | Schedule | FY21 | FY22 | FY23 | FY24 | FY25 | Notes |
| PE/NEPA | \$1,500,000 | Oct 2020 - Apr 2022 | | | | | | |
| Final Design | \$2,500,000 | May 2022 - Dec 2023 | | | | | | |
| Construction | \$45,000,000 | Start Mar 2024 | | | | | | |

Harrisburg Line Station Improvements: Parkesburg

Coordinating Agency: Pennsylvania DOT

In Partnership With: Amtrak, Federal Transit Administration

Type: Improvement Benefit: Shared

Funding Status: Partially funded

One Year Information

FY21 Budget: \$500,000

FY21 Scope: Preliminary engineering and NEPA

FY21 Milestones:

• Preliminary Engineering and NEPA (Jun 2021)

Five Year Information

FY21-25 Funding Available: \$3,500,000

 At this funding level, the following phases could be initiated or completed in FY21-25: Preliminary engineering and NEPA

FY21-25 Additional Funding Needed: \$24,000,000

 With additional funding, the following phases could be initiated or completed in FY21-25 (given resource/ workforce constraints and track outages):
 With funding, preliminary and final design should be accomplished along with one year of construction activities.

Pawtucket/Central Falls Station

Coordinating Agency: Rhode Island DOT

In Partnership With: MBTA

Type: Improvement Benefit: Sole

Funding Status: Fully funded

General Project Information

Full Project Scope

This project will build a new infill commuter rail station along MBTA's Providence Line in Pawtucket, RI with an anticipated opening in 2022. The scope includes station platforms, a pedestrian overpass, and associated

pedestrian access points. The project was the recipient of a 2016 USDOT TIGER Award.

Project Justification The new Pawtucket/Central Falls Station will provide Rhode Island's densest urban communities located between Providence and Attleboro with access to commuter rail service. This station will provide relief to overcrowded stations in Providence and South Attleboro, while attracting new riders from adjacent residential redevelopment areas that would take advantage of proximity to transit for access to jobs, educational opportunities, and medical

options in Boston and Providence.

Total Project \$50,910,000 Cost

Status of PBCA Agreement: Not applicable

Cost Derivation Methodology: The estimate is based on actual contracted dollars from October 2018, estimated RIDOT soft

costs, and Amtrak force account estimates for a main line station stop.

PBCA Notes: Not applicable

Funding sources

CMAQ \$5,580,000

FTA Formula Grants

\$18,000,000 FTA 5307

for entire project history

TIGER \$13,100,000 Rhode Island \$11,230,000

Local funding \$3,000,000 Municipal

| Project Schedule | | | | | | | | |
|-------------------------------|---------------|---------------------|------|------|------|------|------|-------|
| Phase | Cost Estimate | Schedule | FY21 | FY22 | FY23 | FY24 | FY25 | Notes |
| Feasibility/Conceptual Design | | End Jun 2007 | | | | | | |
| PE/NEPA | | End Jan 2018 | | | | | | |
| Final Design | \$7,500,000 | Nov 2018 - Feb 2021 | | | | | | |
| Construction | \$43,410,000 | Apr 2019 - Jul 2022 | | | | | | |

Pawtucket/Central Falls Station

Coordinating Agency: Rhode Island DOT

In Partnership With: MBTA

Type: Improvement Benefit: Sole

Funding Status: Fully funded

One Year Information

FY21 Budget: \$18,500,000

FY21 Scope: The Project is a design / build format and will complete design and environmental permitting. Construction of Station will continue with completion of retaining walls, relocation of the freight rail track, completion of both northbound and southbound platform foundations, and related signal work.

FY21 Milestones:

- Complete environmental permitting (Dec 2020)
- Complete retaining wall construction (Dec 2020)
- Complete 100% design (Feb 2021)
- Relocate freight rail track (Feb 2021)
- Complete southbound platform foundation (May 2021)
- Complete northbound platform foundation (Jun 2021)
- Relocate utilities (Jun 2021)

Notes: Final design shall complete with environmental permits granted. Station construction continues with sitework and retaining walls to increase area needed for station; construction of platform foundations with preparation for actual platform surface installation; and continuing Amtrak work related to signals, communication, and power systems.

Five Year Information

FY21-25 Funding Available: \$34,910,000

At this funding level, the following phases could be initiated or completed in FY21-25: The project is scheduled to complete in summer FY22. FY22 includes completion of platforms and passenger access points including the elevator, stairs and ramps. FY22 also includes installation of the pedestrian bridge, wayfinding, mechanical, electrical and plumbing systems and associated finishes throughout the project. MBTA begins commission testing prior to revenue start date.

FY21-25 Additional Funding Needed: \$0

Providence Station Improvements

Coordinating Agency: Rhode Island DOT

In Partnership With: Amtrak

Type: Improvement Benefit: Shared

Funding Status: Fully funded

General Project Information

Full Project Scope

This project would construct interior layout changes, emergency platform egress, and pedestrian access improvements to Providence Station. The PE/NEPA phase included a full assessment of the station's condition, development of short- and long-term improvements for both the station's interior and exterior, 30 percent design for recommended short-term improvements, and an environmental review on the preferred alternative. Long-term actions could include connections to adjacent retail centers, enhance bus/ intermodal connections, increased parking, and station expansion. RIDOT is pursuing a separate project to develop a transit hub adjacent and connected to Providence Station.

Project Justification

Providence Station was relocated in downtown Providence in the 1980s. The current station is in need of reprogramming of interior space to better reflect the needs of today's travelers. The relocation also created a need for new intermodal connections to ensure that passengers can seamlessly travel to Providence Station for destinations along the Corridor, including Boston, MA. Numerous companies in Boston have also decided to locate additional offices in Providence, thereby increasing the importance for service between the two cities.

Total Project \$28,750,000
Cost Cost Desiration

\$28,750,000 Status of PBCA Agreement: Not available

Cost Derivation Methodology: The cost estimate is based on 2017 30% design plans and is in 2017 dollars.

PBCA Notes: Not available

Funding sources for entire project history ARRA/HSIPR \$3,000,000

Federal State Partnership for SOGR \$12,500,000 FY17-18 Award for Providence Station State of Good Repair

and Capacity Project

RIDOT \$750,000 State match for ARRA/HSIPR

RIDOT \$5,250,000 Match for FY17-18 SOGR Award

Other Amtrak Sources \$7,250,000 Match for FY17-18 SOGR Award

Project Schedule Cost Estimate Schedule FY21 FY22 FY23 FY24 FY25 Notes PE/NEPA \$3,750,000 Sep 2011 - Dec 2017 Final Design \$2,000,000 Sep 2020 - Dec 2020 Feb 2021 - Jul 2022 Construction \$23,000,000

Providence Station Improvements

Coordinating Agency: Rhode Island DOT

In Partnership With: Amtrak

Type: Improvement Benefit: Shared

Funding Status: Fully funded

One Year Information

FY21 Budget: \$14,000,000

FY21 Scope: FD consultant will be given NTP in FY 21 and FD will be completed in the same year. A contractor will be given NTP and construction will begin.

FY21 Milestones:

- Complete FD (Feb 2021)
- Procure contractor (Feb 2021)
- Procure long lead items (Apr 2021)
- Begin construction (Apr 2021)

Five Year Information

FY21-25 Funding Available: \$25,000,000

At this funding level, the following phases could be initiated or completed in FY21-25: FD and construction

FY21-25 Additional Funding Needed: \$0

Warwick/T.F. Green Airport Station

Coordinating Agency: Rhode Island DOT

In Partnership With: Amtrak

Type: Improvement Benefit: Shared

Funding Status: Partially funded

General Project Information

Full Project Scope This project would expand Warwick/T.F. Green Airport rail station which opened in 2010. In that project, the Rhode Island Airport Corporation constructed a station house and a single high-level platform to support the introduction of MBTA commuter rail services to the Airport and to new communities south of Providence. For this project, RIDOT and Amtrak have proposed expanding the station with additional track and platform capacity to

accommodate intercity rail.

Project Justification This project would enable the introduction of Amtrak service at Warwick/T.F. Green Airport rail station.

Total Project Cost \$184,400,000 Status of PBCA Agreement: Not available

Cost Derivation Methodology: In June 2020 Amtrak and RIDOT completed a conceptual design study that included cost

estimates for multiple scenarios. The \$180M scenario is a potential alternative (Alternative 4, track lowering).

PBCA Notes: Not available

Funding sources for entire

CRISI \$2,800,000

Other Federal Discretionary \$720,000 FHWA section 5303/5304 and SPR

Rhode Island \$880,000 20% match to federal funds

project history

| Project Schedule | | | | | | | | |
|-------------------|---------------|---------------------|------|------|------|------|------|-------------------|
| Phase | Cost Estimate | Schedule | FY21 | FY22 | FY23 | FY24 | FY25 | Notes |
| Feasibility Study | \$500,000 | Sep 2016 - Apr 2017 | | | | | | FRA study |
| Engineering Study | \$400,000 | Oct 2018 - Jun 2020 | | | | | | Conceptual design |
| PE/NEPA | \$3,500,000 | Oct 2020 - Dec 2021 | | | | | | |

Warwick/T.F. Green Airport Station

Coordinating Agency: Rhode Island DOT

In Partnership With: Amtrak

Type: Improvement Benefit: Shared

Funding Status: Partially funded

One Year Information

FY21 Budget: \$3,000,000

FY21 Scope: Utilizing funding from a FRA CRISI grant, RIDOT will issue NTP to a consultant for PE/NEPA. It is expected NEPA will be completed during FY21, while the 30% plans will be completed shortly into FY22.

FY21 Milestones:

- NTP to be issued (Oct 2020)
- Complete NEPA (Sep 2021)

Five Year Information

FY21-25 Funding Available: \$3,500,000

 At this funding level, the following phases could be initiated or completed in FY21-25: PE and NEPA completed

FY21-25 Additional Funding Needed: \$180,000,000

 With additional funding, the following phases could be initiated or completed in FY21-25 (given resource/ workforce constraints and track outages):
 Full construction; value shown in 2020 dollars

30th Street West Catenary Replacement

Coordinating Agency: SEPTA

In Partnership With:

Type: Improvement
Funding Status: Fully funded

Benefit: Sole

General Project Information

Full Project Scope This project will replace and modernize the SEPTA overhead catenary system from 30th Street Station westbound to K and Zoo Interlockings, an area that includes SEPTA's Powelton Yard. Work also includes repairs to aging

catenary support structures, foundations, retaining walls, tunnels, and site drainage.

Project Justification The project will rehabilitate assets beyond their useful life and improve system reliability.

Total Project

Cost

\$77,000,000 Status of PBCA Agreement: Not applicable

Cost Derivation Methodology: The cost estimate was developed during the scoping phase of the project. The project design is currently 96% complete.

PBCA Notes: Not applicable

Funding sources for entire project history

Pennsylvania \$74,516,750

Local funding \$2,483,250

| Project Schedule | | | | | | | | | |
|------------------|---------------|---------------------|---|-----|------|------|------|------|--|
| Phase | Cost Estimate | Schedule | F | Y21 | FY22 | FY23 | FY24 | FY25 | Notes |
| Final Design | \$6,864,620 | Feb 2015 - Dec 2020 | | | | | | | |
| Construction | \$70,135,380 | Jun 2021 - Jun 2025 | | | | | | | Funding is programmed in FFY21-25 but not fully obligated |

30th Street West Catenary Replacement

Coordinating Agency: SEPTA

In Partnership With:

Type: Improvement Benefit: Sole

Funding Status: Fully funded

One Year Information

FY21 Budget: \$2,236,845

FY21 Scope: SEPTA forces and contractors are expected to initiate construction in the Spring of 2021.

FY21 Milestones:

- Design Complete (Dec 2020)
- Issue NTP (Jun 2021)

Five Year Information

FY21-25 Funding Available: \$71,388,589

 At this funding level, the following phases could be initiated or completed in FY21-25: This project will be completed in FY 2021-2025.

FY21-25 Additional Funding Needed: \$0

Ardmore Transportation Center: Phase 1 ADA Improvements

Coordinating Agency: SEPTA

In Partnership With: Amtrak, Pennsylvania DOT Type: Improvement **Benefit: Shared**

Funding Status: Fully funded

General Project Information

Full Project Scope

This project will make ADA improvements to Ardmore Station on SEPTA's Paoli-Thorndale Regional Rail Line and Amtrak's Keystone Corridor to make the station fully ADA compliant. The project includes a new station building, high-level platforms, modifications to the existing pedestrian tunnel, elevators and accessible pathways, new canopies and passenger shelters, site and circulation improvements, and installing foundations for a future

parking garage.

Project Justification

The project will make the station fully accessible as well as improve the customer experience and bring the station into a state of good repair.

Total Project \$53,601,817

Status of PBCA Agreement: Completed

Cost

Cost Derivation Methodology: The project cost was updates in 2019 with the award of the construction contracts and is a

current project budget.

PBCA Notes: Not available

Funding sources for entire project

history

FTA Formula Grants \$31,846,090

Other Federal Discretionary \$5,830,670 FTA Earmark

Pennsylvania \$4,910,860 Local funding \$191,564

Other state/local/agency \$3,500,000 RCAP

Other Amtrak Sources \$7,322,533

| Project Schedule | | | | | | | | |
|------------------|---------------|---------------------|------|------|------|------|------|---|
| Phase | Cost Estimate | Schedule | FY21 | FY22 | FY23 | FY24 | FY25 | Notes |
| Final Design | \$4,657,660 | Apr 2009 - Dec 2016 | | | | | | |
| Construction | \$48,942,340 | Aug 2019 - Oct 2022 | | | | | | Construction funding is fully programmed and partially obligated. |

Ardmore Transportation Center: Phase 1 ADA Improvements

Coordinating Agency: SEPTA

In Partnership With: Amtrak, Pennsylvania DOT

Type: Improvement

Benefit: Shared

Funding Status: Fully funded

One Year Information

FY21 Budget: \$12,580,000

FY21 Scope: The FY21 project scope is to continue construction, which is expected to be completed in FY2023.

FY21 Milestones:

Not applicable

Five Year Information

FY21-25 Funding Available: \$46,791,706

 At this funding level, the following phases could be initiated or completed in FY21-25: This project will be completed in FY 2021-2025.

FY21-25 Additional Funding Needed: \$0

Exton Station: Phase 2 Multimodal Improvements

Coordinating Agency: SEPTA

In Partnership With: Amtrak, Pennsylvania DOT

Type: Improvement

Benefit: Shared

Funding Status: Unfunded

General Project Information

Full Project Scope The project includes the construction of a circulation bus loop with shelters and a fully accessible, expanded parking with pathways to the station.

Project Justification

The project will promote multimodal connections by adding parking to the station, which is currently at capacity, and providing seamless access to the station for transit buses and circulator shuttles.

Total Project \$39,500,000

\$39,500,000 Status of PBCA Agreement: Not started

Cost

Cost Derivation Methodology: The cost estimate was developed during the scoping phase in 2010.

PBCA Notes: Not available

Funding sources for entire project history Not available

| Project Schedule | | | | | | | | |
|------------------|---------------|---------------------|------|------|------|------|------|---|
| Phase | Cost Estimate | Schedule | FY21 | FY22 | FY23 | FY24 | FY25 | Notes |
| PE/NEPA | | Start Oct 2020 | | | | | | |
| Final Design | \$4,026,500 | End Mar 2022 | | | | | | Project schedule |
| Construction | \$35,473,500 | Jul 2022 - Jun 2025 | | | | | | assumes funding is identified in FY21-25. Currently no funding is programmed for this project in the FY21-25. |

Exton Station: Phase 2 Multimodal Improvements

Coordinating Agency: SEPTA

In Partnership With: Amtrak, Pennsylvania DOT Type: Improvement Benefit: Shared

Funding Status: Unfunded

One Year Information

FY21 Budget: Not applicable

FY21 Scope: No activities planned for FY21

FY21 Milestones:

• Not applicable

Five Year Information

FY21-25 Funding Available: \$0

At this funding level, the following phases could be initiated or completed in FY21-25: Not applicable

FY21-25 Additional Funding Needed: \$39,500,000

With additional funding, the following phases could be initiated or completed in FY21-25 (given resource/ workforce constraints and track outages): If funding is made available in FY 2021-2025 then the project can be designed and constructed.

Frazer Rail Shop and Yard Upgrade

Coordinating Agency: SEPTA

In Partnership With:

Type: Improvement Benefit: Sole

Funding Status: Fully funded

General Project Information

Full Project Scope

This project will make significant renovations and expand the Frazer Rail Shop and Yard facilities. SEPTA recently acquired new locomotives and is in the process of procuring a fleet of multi-level cars for the Regional Rail System and needs to accommodate the increased fleet size. The initial phase will include significant earthwork and stormwater improvements at the 40-acre site to create space for additional yard tracks. Additional phases of work will include extending three existing storage tracks and adding three new storage tracks; major upgrades to the repair shop and equipment, including the wheel truing machine and drop table; construction of a shop extension, new cleaning track, vehicle washer building, and yardmaster building; and utility upgrades. Also, the roof will be upgraded and mechanical equipment and electrical connections will be replaced.

Project Justification

The project will allow for the storage and maintenance of SEPTA's new rolling stock to accommodate Southeastern Pennsylvania's increasing demand for regional rail service, which has been consistently growing over the last decade.

Total Project \$139,000,000 Cost

Status of PBCA Agreement: Not applicable

Cost Derivation Methodology: The project budget is based on the completion of design and construction for Phase 1, substantial completion of design and construction for Phase 2 and 30% design submission of Phase 3.

PBCA Notes: Not applicable

Funding sources for entire project history

Pennsylvania \$134,517,250

Local funding \$4,482,750

| Project Schedule | | | | | | | | |
|------------------|---------------|---------------------|------|------|------|------|------|---|
| Phase | Cost Estimate | Schedule | FY21 | FY22 | FY23 | FY24 | FY25 | Notes |
| Final Design | \$13,894,291 | Jan 2015 - Mar 2021 | | | | | | |
| Construction | \$125,105,709 | Mar 2016 - Sep 2022 | | | | | | FFY21-25 funding is programmed but not fully obligated. |

Frazer Rail Shop and Yard Upgrade

Coordinating Agency: SEPTA

In Partnership With:

Type: Improvement Benefit: Sole

Funding Status: Fully funded

One Year Information

FY21 Budget: \$1,844,592

FY21 Scope: The FY21 project scope includes substantial completion of Package 1, closeout of Package 2 and the start of Package 3 construction.

FY21 Milestones:

- Package 2 Closeout (Oct 2020)
- Package 1 Substantial Completion (Dec 2020)
- Package 3 Bid Cycle Start (Jun 2021)

Five Year Information

FY21-25 Funding Available: \$62,019,535

At this funding level, the following phases could be initiated or completed in FY21-25: This project will be completed in FY 2021-2025.

FY21-25 Additional Funding Needed: \$0

With additional funding, the following phases could be initiated or completed in FY21-25 (given resource/ workforce constraints and track outages): Not applicable

Notes: SEPTA may re-evaluate the scope of this project based on funding availability. Project schedule and one year budget amount is subject to change.

Harrisburg Line Signal Upgrade: Zoo to Paoli

Coordinating Agency: SEPTA

In Partnership With: Amtrak, Pennsylvania DOT Type: Improvement Benefit: Shared

Funding Status: Unfunded

General Project Information

Full Project Scope

This project will replace the outdated and functionally obsolete, single-direction, signal system on Amtrak's Keystone Line through a coordinated, multi-phased improvement program. Ultimately, this project will provide for implementation of bi-directional signaling (Rule 261 or 562 depending on the location) from Zoo Interlocking to State Interlocking. Amtrak is in the final states of completing the installation of bi-directional signaling from Park Interlocking to Paoli Interlocking. The Zoo to Paoli Signal Upgrade project will continue the installation of bi-directional signals east from Paoli and provides benefits to SEPTA's Paoli-Thorndale Regional Rail service as well as Amtrak's Keystone service. PennDOT, in coordination with Amtrak and SEPTA, has completed or initiated design on the signal system from Zoo to Paoli. The cost to complete this entire project is \$50 million, which includes finalizing design and construction. SEPTA, Amtrak, and PennDOT have partnered to identify Paoli to Overbrook as the next segment of signaling to be upgraded. The Paoli to Overbook segment will cost approximately \$21.9 million to complete.

Project Justification

The project will rehabilitate infrastructure that is beyond its useful life and functionally obsolete. Completion of this project will allow Amtrak to retire the manned signal towers currently in use on the line and will provide significant operational enhancements.

Total Project \$50,000,000 Cost

Status of PBCA Agreement: Not available

Cost Derivation Methodology: The project cost estimate was developed based on conceptual design and general cost estimating principals for signal work.

PBCA Notes: Not available

Funding sources for entire project history

Not available

| Project Schedule | | | | | | | | |
|-------------------|---------------|---------------------|------|------|------|------|------|---|
| Phase | Cost Estimate | Schedule | FY21 | FY22 | FY23 | FY24 | FY25 | Notes |
| NEPA/Final Design | \$1,400,000 | Nov 2020 - Jun 2021 | | | | | | Project schedule |
| Construction | \$20,510,000 | Oct 2021 - Oct 2024 | | | | | | assumes funding is identified in FY21-25. Currently no funding is programmed for this project in the FY21-25. |

Harrisburg Line Signal Upgrade: Zoo to Paoli

Coordinating Agency: SEPTA

In Partnership With: Amtrak, Pennsylvania DOT

Type: Improvement

Benefit: Shared

Funding Status: Unfunded

One Year Information

FY21 Budget: Not applicable

FY21 Scope: No activities planned for FY21

FY21 Milestones:

• Not applicable

Five Year Information

FY21-25 Funding Available: \$0

 At this funding level, the following phases could be initiated or completed in FY21-25: Not applicable

FY21-25 Additional Funding Needed: \$50,000,000

With additional funding, the following phases could be initiated or completed in FY21-25 (given resource/ workforce constraints and track outages): If funding and Amtrak forces are available in FY21-25, then construction can be completed.

Notes : Project schedule assumes funding is identified in FY21-25.

Harrisburg Line Track 2 Restoration: Paoli to Frazer

Coordinating Agency: SEPTA

In Partnership With: Amtrak, Pennsylvania DOT

Type: Improvement

Benefit: Shared

Funding Status: Unfunded

General Project Information

Full Project Scope This project would reinstall a third track on the 4-mile segment from Paoli to Frazer. In addition to the track work, the project will include overhead contact system (OCS), signal, interlocking modifications, and right-of-way work all of which is needed to operate on the new track. All work will occur in the existing right-of-way. This project is

an estimated \$50 million unfunded need.

Project Justification

Cost

The project will improve operational efficiency.

Total Project

\$50,000,000 Status of PBCA Agreement: Not started

Cost Derivation Methodology: The project cost estimate was developed based on conceptual design and general cost estimating principals for track, catenary and signal work.

PBCA Notes: Not available

Funding sources for entire project history Not available

| Project Schedule | | | | | | | | |
|------------------|---------------|---------------------|------|------|------|------|------|--|
| Phase | Cost Estimate | Schedule | FY21 | FY22 | FY23 | FY24 | FY25 | Notes |
| PE/NEPA | \$2,000,000 | Jan 2021 - Dec 2021 | | | | | | Project schedule |
| Final Design | \$3,000,000 | Jan 2022 - Oct 2022 | | | | | | assumes funding is identified in |
| Construction | \$45,000,000 | Mar 2023 - Mar 2025 | | | | | | FY21-25 and Amtrak forces are available for design and construction. Currently no funding is programmed for this project in the FY21-25 and Amtrak has not committed forces for this project. |

Harrisburg Line Track 2 Restoration: Paoli to Frazer

Coordinating Agency: SEPTA

In Partnership With: Amtrak, Pennsylvania DOT

Type: Improvement

Benefit: Shared

Funding Status: Unfunded

One Year Information

FY21 Budget: Not applicable

FY21 Scope: No activities planned for FY21

FY21 Milestones:

• Not applicable

Five Year Information

FY21-25 Funding Available: \$0

 At this funding level, the following phases could be initiated or completed in FY21-25: Not applicable

FY21-25 Additional Funding Needed: \$50,000,000

 With additional funding, the following phases could be initiated or completed in FY21-25 (given resource/ workforce constraints and track outages):
 If funding is made available in FY 2021-2025 then the project can be designed and constructed.

Harrisburg Line Track 2 Upgrade: Glen to Thorn (MP 25.3 to 35.0)

Coordinating Agency: SEPTA

In Partnership With: Amtrak, Pennsylvania DOT

Type: Improvement

Benefit: Shared

Funding Status: Fully funded

General Project Information

Full Project Scope This project will rehabilitate and upgrade Track 2 from Glen to Thorn Interlocking in Chester County, PA, on the Amtrak-owned Harrisburg Line. The project will upgrade 10 miles of track to FRA Class 3 standards (60 mph) and upgrade the signal system to Rule 562. The corridor services Amtrak's Keystone and Pennsylvanian services, SEPTA's Paoli-Thorndale service, and freight operations. The project will eliminate a choke point, enhancing rail

capacity and reliability while also improving operational safety and flexibility.

Project Justification The upgrade of Track 2 will reduce congestion on the corridor. SEPTA is in the process of expanding its Frazer Yard to accommodate additional trains, which will increase rail traffic on the heavily used corridor. Upgrading the track will return it to a state of good repair and allow for faster deadhead moves between Frazer and Thorndale

thereby reducing the number of trains using revenue tracks.

Total Project Cost

Total Project \$16,675,000 Status of PBCA Agreement: Not started

Cost Derivation Methodology: The project cost estimate was developed based on conceptual design and general cost

estimating principals for track, catenary and signal work.

PBCA Notes: Not available

Funding Federal State Partnership for SOGR

\$8,337,500 FY19 Award for Harrisburg Line Capacity Improvements

sources for entire project

history

PennDOT \$2,000,000 Match for FY19 SOGR Award

SEPTA \$5,937,500 Match for FY19 SOGR Award

Other Amtrak Sources \$400,000 Match for FY19 SOGR Award

| Project Schedule | | | | | | | | |
|------------------|---------------|---------------------|------|------|------|------|------|-------|
| Phase | Cost Estimate | Schedule | FY21 | FY22 | FY23 | FY24 | FY25 | Notes |
| Construction | \$16,675,000 | Jan 2021 - Jun 2022 | | | | | | |

Harrisburg Line Track 2 Upgrade: Glen to Thorn (MP 25.3 to 35.0)

Coordinating Agency: SEPTA

In Partnership With: Amtrak, Pennsylvania DOT

Type: Improvement

Benefit: Shared

Funding Status: Fully funded

One Year Information

FY21 Budget: \$4,670,000

FY21 Scope: Complete FRA grant agreement, SEPTA-Amtrak project agreement, and initiate construction

FY21 Milestones:

• Initiate Construction (Feb 2021)

Five Year Information

FY21-25 Funding Available: \$16,675,000

 At this funding level, the following phases could be initiated or completed in FY21-25:
 The project will be designed and constructed.

FY21-25 Additional Funding Needed: \$0

Malvern Station: ADA Improvements

Coordinating Agency: SEPTA

In Partnership With:

Type: Improvement Funding Status: Unfunded

Benefit: Sole

General Project Information

Full Project Scope Design and construction of high-level platforms and accessibility improvements at Malvern Station on SEPTA's Paoli-Thorndale Regional Rail Line. This station will receive new full length high-level platforms; new passenger shelters; accessible pathways, bike facilities; additional new signage and lighting; stormwater management

systems and landscaping.

Project Justification The addition of high-level platforms will improve accessibility at Malvern Station.

Total Project Cost \$15,260,000 Status of PBCA Agreement: Not applicable

Cost Derivation Methodology: The project cost estimate was developed based on conceptual design and general cost estimating principals for high-level platforms and accessibility improvements.

estimating principals for high-level platforms and accessibility imp

PBCA Notes: Not applicable

Not available

Funding sources for entire project history

Project Schedule Phase **Cost Estimate** Schedule FY21 FY22 FY23 FY24 FY25 Notes PE/NEPA \$860,000 Mar 2022 - Dec 2022 Funding is programmed in Final Design \$745,000 Dec 2022 - Jul 2023 FY26 but could be completed earlier if Jan 2024 - Jun 2026 \$13,655,000 Construction funding is identified.

Malvern Station: ADA Improvements

Coordinating Agency: SEPTA

In Partnership With:

Type: Improvement Benefit: Sole

Funding Status: Unfunded

One Year Information

FY21 Budget: Not applicable

FY21 Scope: No activities planned for FY21

FY21 Milestones:

Not applicable

Five Year Information

FY21-25 Funding Available: \$0

At this funding level, the following phases could be initiated or completed in FY21-25: Not applicable

FY21-25 Additional Funding Needed: \$15,260,000

With additional funding, the following phases could be initiated or completed in FY21-25 (given resource/ workforce constraints and track outages): If SEPTA has programmed funding for this project in FY2026 and Amtrak forces are available in FY 2021-2025 then the project can be designed and construction can be initiated.

Paoli Transportation Center: Phase 2 Station & Intermodal **Improvements**

Coordinating Agency: SEPTA

In Partnership With: Amtrak, Pennsylvania DOT Type: Improvement Benefit: Shared

Funding Status: Unfunded

General Project Information

Full Project Scope

This project provides for the engineering and construction of a new multimodal transportation center in Paoli, Chester County. The new facility is located on SEPTA's Paoli/Thorndale Regional Rail Line and Amtrak's Harrisburg Line. Connecting services include Bus Routes 92, 106, 204, and 206. SEPTA partnered with PennDOT and Amtrak to advance this project. The project will be advanced in two phases. Phase 1, completed in September 2019, made the existing station ADA accessible. This phase included construction of a pedestrian overpass with elevators linking inbound and outbound station parking lots as well as a new full length high-level center platform. The outbound parking areas were reconfigured and pedestrian sidewalks and crosswalks, provided throughout the station area. A companion PennDOT project will consist of the extension of Darby Road over the railroad, including a new bridge connecting to the station, and the removal of the North Valley Road bridge. The companion project must be completed prior to Phase 2 construction. Phase 2 includes an intermodal station complex complete with an additional high-level platform on the outbound side, passenger amenities, enhanced bus facilities, and a commuter parking garage.

Project Justification The project will improve accessibility, passenger amenities and intermodal connections. In addition, the new parking garage will provide opportunities for more passengers to access SEPTA and Amtrak service.

Total Project \$51,200,000 Cost

Status of PBCA Agreement: Not started

Cost Derivation Methodology: The project cost estimate was developed based on conceptual design and general cost

estimating principals.

PBCA Notes: Not available

Funding sources for entire project

history

Not available

| Project Schedule | | | | | | | | | |
|------------------|---------------|---------------------|------|------|------|------|------|---|--|
| Phase | Cost Estimate | Schedule | FY21 | FY22 | FY23 | FY24 | FY25 | Notes | |
| PE/NEPA | \$2,750,000 | Jan 2024 - Dec 2024 | | | | | | Project schedule | |
| Final Design | \$2,250,000 | Jan 2025 - Dec 2025 | | | | | | assumes funding is identified in FY21-25. | |
| Construction | \$46,200,000 | Jun 2026 - Dec 2028 | | | | | | Currently no funding is programmed for this project in the FY21-25. | |

Paoli Transportation Center: Phase 2 Station & Intermodal **Improvements**

One Year Information

FY21 Budget: Not applicable

FY21 Scope: No activities planned for FY21

FY21 Milestones:

Not applicable

Coordinating Agency: SEPTA

In Partnership With: Amtrak, Pennsylvania DOT Type: Improvement Benefit: Shared

Funding Status: Unfunded

Five Year Information

FY21-25 Funding Available: \$0

At this funding level, the following phases could be initiated or completed in FY21-25: Not applicable

FY21-25 Additional Funding Needed: \$51,200,000

With additional funding, the following phases could be initiated or completed in FY21-25 (given resource/ workforce constraints and track outages): If funding and Amtrak forces are available in FY 2021-2025 then the project can be designed and construction can be planned.

Southwest Connection Improvement Project

Coordinating Agency: SEPTA In Partnership With: Amtrak

Type: Improvement
Funding Status: Fully funded

Status of PBCA Agreement: Not applicable

Benefit: Shared

General Project Information

Full Project Scope Reconfiguration and rebuilding of Regional Rail signals, track, catenary, and interlockings from 30th Street Station to Phil Interlocking (in University City). Work includes new track special work, Overhead Contact Systems (OCS), and switch and lock mechanisms, as well as the addition of new Positive Train Control (PTC) systems. The existing signal block layout will be modified. Design and construction will progress in phases with construction outages scheduled for the summer of 2018, 2019 and 2020. As part of the project, SEPTA will assume maintenance responsibility for Amtrak's tracks on a segment where SEPTA is the sole operator. This project includes Civic

Interlocking.

Project Justification The project will repair assets that are beyond their useful life and improve system reliability.

Total Project Cost

\$70,990,000

Cost Derivation Methodology: The project cost estimate was increased due to costs incurred during the 2018 outage and

construction.

PBCA Notes: Not applicable

Funding sources

Pennsylvania \$68,700,573 Funding is programmed in FFY 2021-2025 but not fully

obligated.

for entire project history

Local funding \$2,289,427

| Project Schedule | | | | | | | | |
|------------------|---------------|---------------------|------|------|------|------|------|---|
| Phase | Cost Estimate | Schedule | FY21 | FY22 | FY23 | FY24 | FY25 | Notes |
| Final Design | \$9,663,483 | Oct 2014 - Aug 2020 | | | | | | |
| Construction | \$61,326,517 | May 2017 - Mar 2021 | | | | | | Funding is programmed in FFY21-25 but not fully obligated. |

Southwest Connection Improvement Project

Coordinating Agency: SEPTA In Partnership With: Amtrak

Type: Improvement Benefit: Shared

Funding Status: Fully funded

One Year Information

FY21 Budget: \$6,270,798

FY21 Scope: The FY21 project scope is to continue construction to be completed in FY22.

FY21 Milestones:

Not applicable

Five Year Information

FY21-25 Funding Available: \$34,124,672

 At this funding level, the following phases could be initiated or completed in FY21-25:
 The project will be completed in FY 2021-2025.

FY21-25 Additional Funding Needed: \$0

Villanova Station: Phase 2 ADA Improvements

Coordinating Agency: SEPTA

In Partnership With:

Type: Improvement

Funding Status: Unfunded

Benefit: Sole

General Project Information

Full Project Scope This project will modernize Villanova Station on SEPTA's Paoli-Thorndale Regional Rail Line. Work includes high-level platforms, canopies, and an improved station building. SEPTA currently leases this station from Amtrak.

Project Justification

The project will make the station fully accessible as well as improve the customer experience and bring the station

into a state of good repair.

Total Project \$10,450,000 Cost Cost Derivation

\$10,450,000 Status of PBCA Agreement: Not applicable

Cost Derivation Methodology: The cost estimate was developed based on substantial completion of Phase 1 construction and 90% design submission of Phase 2.

PBCA Notes: Not applicable

Funding sources for entire project history Pennsylvania \$10,450,000

| Project Schedule | | | | | | | | |
|------------------|---------------|---------------------|------|------|------|------|------|--|
| Phase | Cost Estimate | Schedule | FY21 | FY22 | FY23 | FY24 | FY25 | Notes |
| Construction | \$10,450,000 | Mar 2023 - Oct 2025 | | | | | | Funding is programmed in FY21 for this project. No funding is currently obligated. |

Villanova Station: Phase 2 ADA Improvements

Coordinating Agency: SEPTA

In Partnership With:

Type: Improvement Benefit: Sole

Funding Status: Unfunded

One Year Information

FY21 Budget: Not applicable

FY21 Scope: No activities planned for FY21

FY21 Milestones:

• Not applicable

Five Year Information

FY21-25 Funding Available: \$10,450,000

 At this funding level, the following phases could be initiated or completed in FY21-25: At this level of funding, construction will be initiated in FY2021-2025.

FY21-25 Additional Funding Needed: \$0

VRE Midday Storage Facility

Coordinating Agency: VRE

In Partnership With: District DOT, Amtrak

Type: Improvement

Benefit: Sole

Funding Status: Fully funded

General Project Information

Full Project Scope The Midday Storage Facility project will replace the current storage space leased from Amtrak at the Ivy City Coach Yard in the District of Columbia. The project will include planning, designing, and constructing a permanent midday storage facility for VRE trains that travel to the District. The proposed facility will be used to store commuter trains on weekdays between the inbound morning commute and the outbound afternoon commute.

Project Justification Midday train storage in the Washington, DC metropolitan region is critical to VRE's continued operations and growth. VRE operates trains providing daily commuter rail service from as far as Manassas and Fredericksburg, Virginia, into Union Station. During the weekday midday, those trains need to be stored near Union Station and off the main line tracks. Currently, VRE stores trains in Amtrak's Ivy City rail complex in the District of Columbia. The current and future demand for train storage and maintenance functions -- for both Amtrak intercity and VRE commuter services -- within the existing Ivy City rail complex exceeds available space.

Total Project \$99,366,508
Cost Cost Derivation

\$99,366,508 Status of PBCA Agreement: Not applicable

Cost Derivation Methodology: Total project cost derivation details not available. Total project cost in YOE dollars.

PBCA Notes: Not applicable

Virginia

VRE

Funding sources for entire project

history

FTA Formula Grants \$61,607,235 Includes both 5307 and 5337 funds

\$33,784,613 State match to federal funds

\$3,974,660 VRE/local match to federal funds

| Project Schedule | | | | | | | | | | |
|--|---------------|---------------------|------|------|------|------|------|-------|--|--|
| Phase | Cost Estimate | Schedule | FY21 | FY22 | FY23 | FY24 | FY25 | Notes | | |
| Feasibility/Conceptual Design and NEPA | \$4,877,802 | Aug 2016 - Apr 2018 | | | | | | | | |
| Engineering and Final Design | \$3,478,706 | Aug 2018 - Jan 2022 | | | | | | | | |
| Property Acquisition and Construction | \$91,010,000 | Mar 2022 - Sep 2024 | | | | | | | | |

VRE Midday Storage Facility

Coordinating Agency: VRE

In Partnership With: District DOT, Amtrak

Type: Improvement

Benefit: Sole

Funding Status: Fully funded

One Year Information

FY21 Budget: \$8,383,706

FY21 Scope: Continue discussions with Amtrak on most efficient use of space within Ivy City property and best approach for meeting near- and long-term capacity needs Prepare for critical property acquisition actions

FY21 Milestones:

Not applicable

Five Year Information

FY21-25 Funding Available: \$96,780,678


 At this funding level, the following phases could be initiated or completed in FY21-25:
 All phases expected to be complete by FY25.

FY21-25 Additional Funding Needed: \$0

Photo Credits

Cover: "The Yards at Hudson Yards" by flickr user Charles Fulton, 2017. Used under Creative Commons License Attribution 2.0 Generic (CC BY 2.0): https://creativecommons.org/licenses/by/2.0/ Photo available at: https://flic.kr/p/HdGMPK

- Page iii: Newark Penn Station: Courtesy of Amtrak.
- Page 7: Washington Union Station: Courtesy of Amtrak.
- Page 12: New Haven Union Station. Courtesy of Amtrak.
- Page 12: Baltimore Penn Station. Courtesy of Amtrak.
- Page 12: "VRE and the M Street cycle-track" by flickr user BeyondDC, 2018. Used under Creative Commons License Attribution-NonCommercial 2.0 Generic (CC BY-NC 2.0): https://creativecommons.org/licenses/by-nc/2.0/ Photo available at: https://flic.kr/p/27YYD32
- Page 12: "Outbound train arriving at South Attleboro station, June 2013" by Wikimedia user Pi.1415926535. 2013. Used under Creative Commons Attribution-Share Alike 3.0 Unported (CC BY-SA 3.0): https://creativecommons.org/licenses/by-sa/3.0/ Photo available at: https://commons.wikimedia.org/wiki/File:Outbound_train_arriving_at_South_Attleboro_station,_ June_2013.JPG
- Page 12: New Acela Trainset in Philadelphia. Courtesy of Amtrak.
- Page 15: Moynihan Train Hall Under Construction. Courtesy of Amtrak.
- Page 15: MARC Train at West Baltimore Station. Courtesy of Amtrak.
- Page 15: Middletown Station. Courtesy of Pennsylvania DOT.
- Page 15: "New Brunswick Station, street view" by Wikimedia user Zeete, 2013. Used under Creative Commons Attribution-Share Alike 3.0 Unported (CC BY-SA 3.0): https://creativecommons.org/licenses/by-sa/3.0/ Photo available at: https://commons.wikimedia.org/wiki/File:New_Brunswick_Station,_street_view.jpg
- Page 17: Metro-North Train Repair. Courtesy of Metropolitan Transportation Authority of the State of New York.
- Page 17: New Acela Trainset Pantograph. Courtesy of Amtrak.
- Page 18: Baltimore & Potomac Tunnel. Courtesy of Amtrak.
- Page 18: Connecticut River Bridge. Courtesy of Connecticut DOT.
- Page 18: North River Tunnels. Courtesy of Amtrak.
- Page 19: Midline Loop. Courtesy of NJ Transit.
- Page 19: Penn Station New York. Courtesy of Amtrak.
- Page 19: Harrisburg Line Interlocking. Courtesy of Amtrak.
- Back Cover: Portal Bridge Opening. Courtesy of Amtrak.

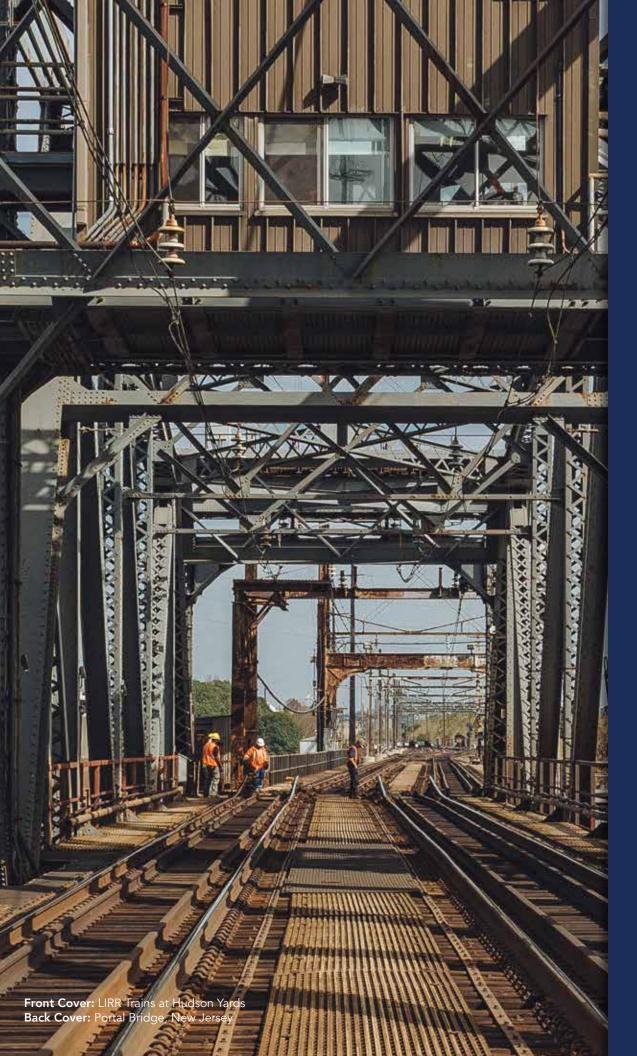























nec-commission.com/fy25-cip